

HIGH TEMPERATURE INDUCTIVE SENSE HEADS


400°F (205°C) High Temp Limit

U.S. Standard Thread

Metric Thread

Model 85007

Weight: 2.5 oz. (70 gr.)

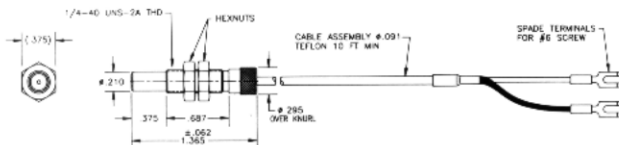


Stable Operating Gap*
Presence: .125" (3.17 mm)
Gauging: .050" (1.27 mm)



Model 85017

Weight: 2.5 oz. (70 gr.)

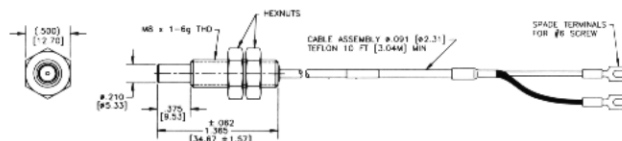


Stable Operating Gap*
Presence: .125" (3.17 mm)
Gauging: .050" (1.27 mm)



Model 85009

Weight: 3.5 oz. (100 gr.)

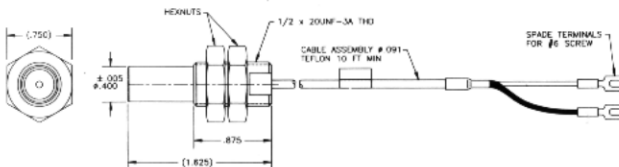


Stable Operating Gap*
Presence: .250" (6.35 mm)
Gauging: .100" (2.54 mm)



Model 85019

Weight: 3.5 oz. (100 gr.)

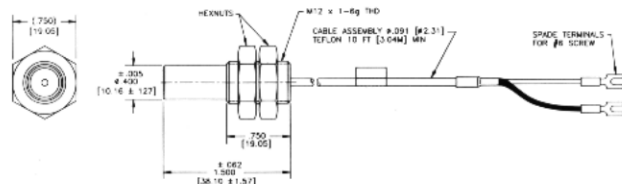

Stable Operating Gap*
Presence: .250" (6.35 mm)
Gauging: .100" (2.54 mm)



**ISO
9001**

***Presence: when used for presence sensing with EN or PL Series Modules .Sense head ordered separately. Gauging: when used for linear measurement with EMD or PA115 Modules. Sense head included with system model #.**