


# DOUBLE VISION<sup>®</sup> DUAL DISPLAY VOLTAGE INDICATING PHASER

DDVIP-138

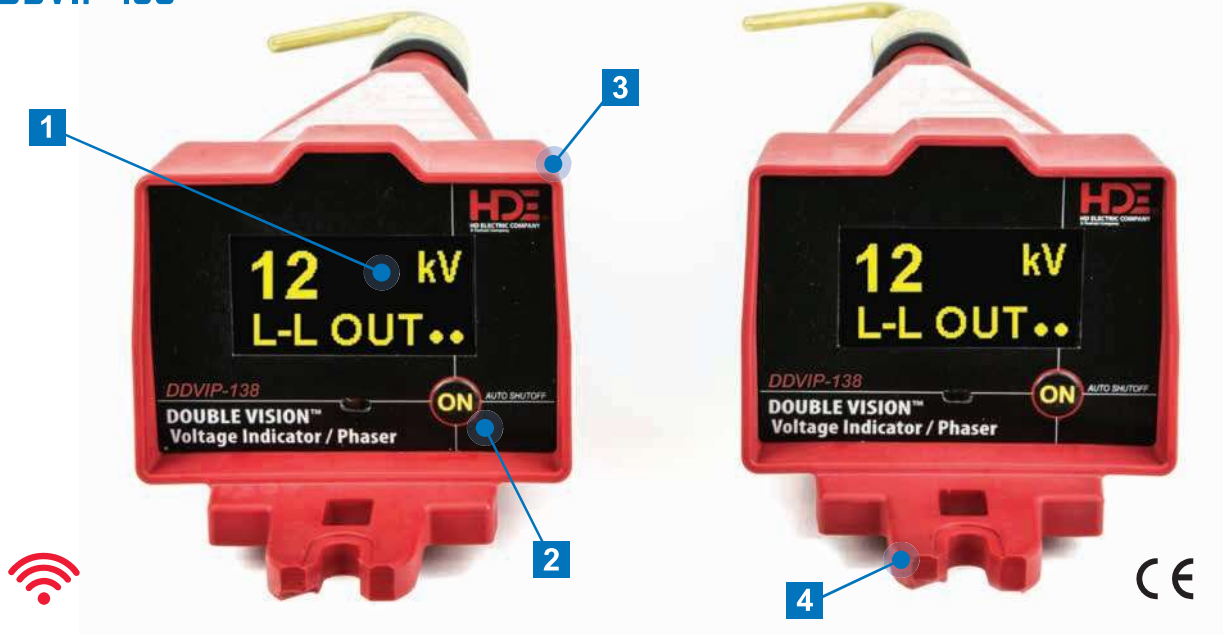

- 1** OVERSIZED LED DISPLAY
- 2** ONE-BUTTON OPERATION FOR ALL FUNCTIONS
- 3** ULTRA-LIGHT DURABLE HOUSING
- 4** UNIVERSAL SPLINE AND SHOTGUN STICK CONNECTIONS

- Measures voltage from 100V to 138kV line-to-line
- Can be used individually as voltage indicators or together for phasing operations up to 100 ft. (30m) apart
- Two LED displays are automatically synchronized during phasing operations
- Clear in-phase and out-of-phase indication
- Versatile for overhead & underground applications
- Capacitive Test Point and Peak Hold modes



Capacitive Test Point Mode



Peak Hold Mode



HD ELECTRIC COMPANY

HDElectricCompany.com



HD ELECTRIC COMPANY

# DOUBLE VISION<sup>®</sup> DUAL DISPLAY VOLTAGE INDICATING PHASER

DDVIP-138

HDElectricCompany.com

## PROBES AND ACCESSORIES

Overhead Probes	Underground Dead Front Bushing Probes	Insulated Underground Probe	Underground Elbow Probe	Proof Tester <sup>®</sup> Voltmeter/Phaser Tester	Extension Hot Sticks
					
025-OLPS-5 (l); 025-OLPS-6 (r)	ASP-15/25 (l); ASP-35U (r)	GCP-1	EA-15/25	PT-DDVIP	Different Lengths and Telescopic Hot Sticks Available

## SPECIFICATIONS

<b>Model Number</b>	DDVIP-138
<b>Operating Voltage Range</b>	100V-138kV line-to-line, 100V-80kV line-to-ground, AC 50/60Hz
<b>Phasing Frequency</b>	50/60Hz
<b>Accuracy</b>	Within 15%, dependent on geometry
<b>LED Numeral Height</b>	0.7", indicates 3 digits

<b>Battery</b>	9V lithium or alkaline
<b>Battery Life</b>	8 hours of continuous use under normal conditions
<b>Operating Temperature Range</b>	-20°F to +120°F (-29°C to +49°C)
<b>Weight (Without Probes)</b>	1.6 lbs. (0.7 kg) each unit
<b>Dimensions (Without Probes)</b>	14" L x 4.6" W x 4.1" H (36 cm x 12 cm x 10 cm)

## ORDERING INFORMATION

PART NO.	DESCRIPTION	INCLUDED ACCESSORIES					
		025-OLPS-5	ASP-15/25	ASP-35U	PT-DDVIP	CS-SVM	CS-DDVM
<b>DDVIP-138S</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH Single Kit, Base	1	0	0	0	1	0
<b>DDVIP-138S/K01</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH Single Kit 1	1	0	0	1	1	0
<b>DDVIP-138S/K02</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH/UG Single Kit 1	1	1	0	1	1	0
<b>DDVIP-138S/K03</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH/UG Single Kit 2	1	1	1	1	0	1
<b>DDVIP-138</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH Kit, Base	2	0	0	0	0	1
<b>DDVIP-138/K01</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH Kit 1	2	0	0	1	0	1
<b>DDVIP-138/K02</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH/UG Kit 1	2	2	0	1	0	1
<b>DDVIP-138/K03</b>	Dual Display Wireless Voltage Indicating Phaser 100V-138kV, OH/UG Kit 2	2	2	2	1	0	1
<b>025-OLPS-5</b>	Overhead Brass Hook Probe						
<b>025-OLPS-6</b>	Overhead Brass Pigtail Probe						
<b>ASP-15/25</b>	15kV and 25kV Class Insulated Underground Probe for Loadbreak Bushings						
<b>ASP-35U</b>	35kV Insulated Underground Probe for Loadbreak Bushings Designed for Both Elastimold <sup>®</sup> and Cooper <sup>™</sup> (RTE) Bushings						
<b>GCP-1</b>	General Contact Underground Distribution Probe						
<b>EA-15/25</b>	15kV and 25kV Class Underground Loadbreak Elbow Probe						
<b>PT-DDVIP</b>	Proof Tester <sup>®</sup> Voltage Indicating Phaser Tester - Confirms Proper Operation						
<b>S-4H</b>	4' Extension Hot Stick with Universal Spline, Foam Filled, 1-1/4" Diameter Fiberglass						
<b>S-6H</b>	6' Extension Hot Stick with Universal Spline, Foam Filled, 1-1/4" Diameter Fiberglass						
<b>CS-SVM</b>	Plastic Carrying Case for DDVIP-138S and Kits						
<b>CS-DDVM</b>	Plastic Carrying Case for DDVIP-138 and Kits						

The use of a hot stick is required. Other kits and telescopic hot sticks are available, contact HDE.

Elastimold<sup>®</sup> is a registered trademark of ABB ASEA Brown Boveri Ltd.

Cooper<sup>™</sup> is a trademark of Eaton Corporation and/or its affiliates.

Printed in U.S.A. © 2018 HD Electric Company Bulletin No. DDVIP-138a 07/18