




Panel Mount Process Tachometer, T6



Front programmable with relay and sensor indicators.

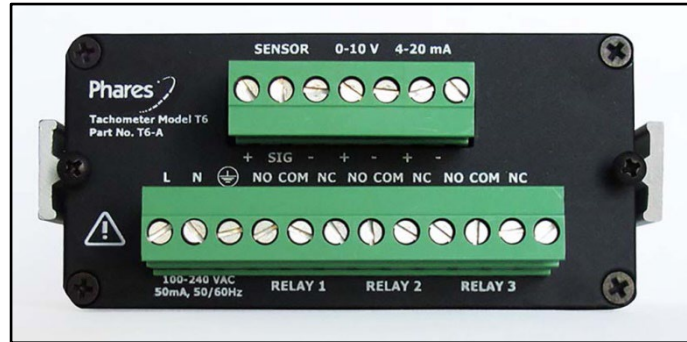

Terminal Blocks on the Back of T6-A Tachometer.

General Specifications

Analog Output: 0-10V and 4-20 mA
Universal Signal Input: 24 VDC, Sinking or Sourcing, NPN or PNP, 2 or 3 Wire
Sensor Input Current: 0.14 mA (Min.)
Relays: Quantity of 3, each with 1 NO/NC (Form C) Contact
Relay Contact Rating: 3A @125 VAC
Operating Temperature: -40°F to 140°F
Fusing: ½ A Max., Input Power, Fuse F4
 3 A Max., Relay Common, Fuses 1-3
Display:
 Seven segment LED, 4 Digit, with decimal point.
 Ranges: 0-9,999, 0-999.9, 0-99.99, 0-9.999
 LED Height: 0.50", Color: Red
Accuracy: +/- 2 Least Significant Digits

Enclosure: Aluminum, gasketed, with side mounting bars for control panel installation. When properly installed, gasket will provide a NEMA 4 seal.
Dimensions:
 1.6875" H x 3.5625" W x 5.3750" D
 Depth measurement includes terminal blocks.
 Cutout Dimensions:
 1.75" H x 3.60" W, +/- 0.025"
Certifications:
 Conforms to the following standards:
 CAN/CSA C22.2 No. 61010-1:2012
 UL 61010-1:2012
 EN 61010-1:2012

Part Number Chart

Part Number	Input Voltage	Display
T6-A	100-240 VAC, 50 mA	4 Digits with Decimal Point
T6-D	9-36 VDC, 140 mA	4 Digits with Decimal Point
T6-A-E5	100-240 VAC, 50 mA	5 Digits with Decimal Point
T6-D-ES	9-36 VDC, 140 mA	5 Digits with Decimal Point