

Acuvim L Series

Multifunction Power Meters



FEATURES

- Metering of Distribution Feeders, Transformers, Generators, Capacitor Banks and Motors
- Medium and Low Voltage Systems
- Commercial, Industrial, Utility
- Power Quality Analysis
- IP56 Rating



ISO9001 Certified

ACCUEENERGY

DESCRIPTION

The Acuvim-L series are multifunction power meters manufactured by Accuenergy. It is the ideal choice for monitoring and controlling of power distribution system. Some of the features and electric power parameters available on the Acuvim-L are:

- True-RMS Measuring Parameter
- 4-quadrant Energy
- Power Quality Analysis
- Over/Under Limit Alarm
- Energy Pulse Output
- TOU, 4 Tariffs, 12 Seasons, 14 Schedules

Acuvim-L may be used as a data gathering device for an intelligent Power istribution System or a Plant Automation System. All monitoring data is available via digital RS485 communication port running Modbus® Protocol.

The quality of the power system is important with increasing use of electronic loads such as computers, ballasts or variable frequency drives. With the Acuvim-L power analysis option, any phase current or voltage can be displayed and the harmonic content calculated. By knowing the harmonic distribution, action can be taken to prevent overheated transformers, motors, capacitors, neutral wires and nuisance breaker trips. Redistribution of the system loading can also be determined.

FEATURES

- Metering of distribution feeders, transformers, generators, capacitor banks and motors
- Medium and low voltage systems
- Commercial, industrial, utility
- Power quality analysis

FEATURES

Metering

- Voltage V1, V2, V3, V12, V23, V31
- Current I1, I2, I3, In
- Power P1, P2, P3, Psum
- Reactive Power Q1, Q2, Q3, Qsum
- Apparent Power S1, S2, S3, Ssum
- Frequency F

- Power Factor PF1, PF2, PF3, PF
- Energy Ep_imp, Ep_exp
- Reactive Energy Eq_imp, Eq_exp
- Apparent Energy Es
- Demand Dmd_I1, Dmd_I2, Dmd_I3, Dmd_P, Dmd_Q, Dmd_S

Monitoring

- Power Quality
- Voltage Harmonics 2nd ~31st and THD
- Current Harmonics 2nd ~31st and THD
- Voltage Unbalance Factor U_unbl
- Current Unbalance Factor I_unbl
- Max/Min Statistics
- Meter Running Time and Load Running Time

Alarm

Two (2) parameters may be set within a specified time interval. If indicated parameter is over or under its setting limit and persists over the specified time interval, the event will be recorded with time stamps and trigger the alarm DO output. The indicated parameter can be selected from any of the 35 parameters available.

I/O option module

The Acuvim-DL/EL model can extend the I/O module. Digital input, pulse counter, pulse output and SOE can provided by extention I/O module.

Pulse Output option

Two digital outputs can be configured as pulse output for kWh and kvarh. The pulse rate and width can be set.

Communication

RS485, industry standard Modbus® RTU protocol;
Options are the second RS485 module, PROFIBUS-DP/VO module.

Display

Clear and large character LCD Screen display with white back light; Wide environmental temperature endurance.

Outline










Small size 96x96x51mm (92x92 cutout) DIN or 4" ANSI round Extention I/O: 90x55.6x19.5mm

Acuvim-L METER

● Function ○ Option Blank NA







Function		Parameter	Acuvim-AL	Acuvim-BL	Acuvim-CL	Acuvim-DL	Acuvim EL	Acuvim-KL
REAL TIME METERING	Phase Voltage	U1, U2, U3	●	●	●	●	●	
	Line Voltage	U12, U23, U31	●	●	●	●	●	
	Current	I1, I2, I3, In (Acuvim-KL no neutral current measurement)	●	●	●	●	●	●
	Power	P1, P2, P3, PSUM	●	●	●	●	●	●
	Reactive Power	Q1, Q2, Q3, Qsum	●	●	●	●	●	●
	Apparent Power	S1, S2, S3, SSUM	●	●	●	●	●	●
	Power Factor	PF1, PF2, PF3, PF	●	●	●	●	●	
	Load Nature	L / C / R	●	●	●	●	●	
	Frequency	F Hz	●	●	●	●	●	
ENERGY & DEMAND	Energy	Ep_imp, Ep_exp	●	●	●	●	●	●
	Reactive Energy	Eq_imp, Eq_exp	●	●	●	●	●	●
	Apparent Power	Es	●	●	●	●	●	●
	Current Demand	Dmd_I1, Dmd_I2 Dmd_I3	●	●	●	●	●	
	Power Demand	Dmd_Psum, Dmd_Qsum, Dmd_Ssum	●	●	●	●	●	
TIME OF USE	Energy	TOU, 4 Tarifas, 12 estações, 14 Horários						●
POWER QUALITY	Voltage Unbalance	U_unbl	●	●	●	●	●	
	Current Unbalance	I_unbl	●	●	●	●	●	
	Voltage THD	THD_V1, THD_V2, THD_V3	●	●	●	●	●	
	Current THD	THD_I1, THD_I2, THD_I3	●	●	●	●	●	
	Individual Harmonics	2 nd to 31 st	●	●	●	●	●	
STATISTICS	Max Current Demand	Dmd_I1_max, Dmd_I2_max, Dmd_I3_max	●	●	●	●	●	
	Max Power Demand	Dmd_Psum_max, Dmd_Qsum_max, Dmd_Ssum_max	●	●	●	●	●	
	Max & Min of Voltage		●	●	●	●	●	
	Max & Min of Current		●	●	●	●	●	
HOUR	Running Time	Hour	●	●	●	●	●	●
	Load Running Time	Hour				●	●	●
I/O	Energy Pulse Output	2 DO, configured as pulse output for kWh and kvarh, the pulse rate and width can be set		●				
	Alarm Output			●				
COMMUNICATION	RS-485	Modbus®-RTU Protocol, 1200~38400 baud rate			●	●	●	●
	Second RS-485	Modbus®-RTU Protocol, 1200~38400 baud rate				○	○	
	Profibus	PROFIBUS-DP/V0 Protocol				○	○	
EXTENSION I/O	4DI, 2DO	SOE, Pulse Counter, Pulse output, Alarm output				○	○	

TYPICAL WIRING

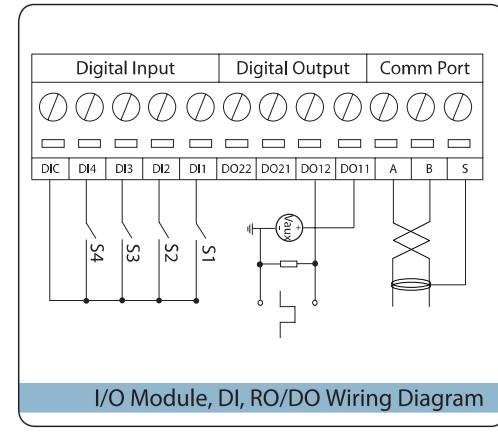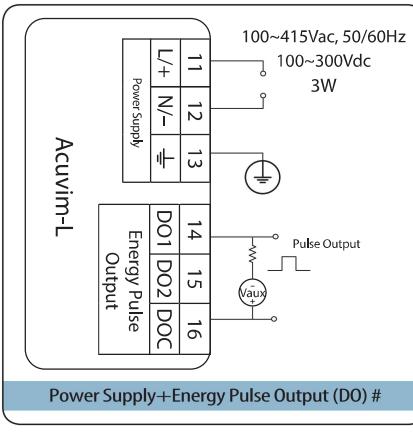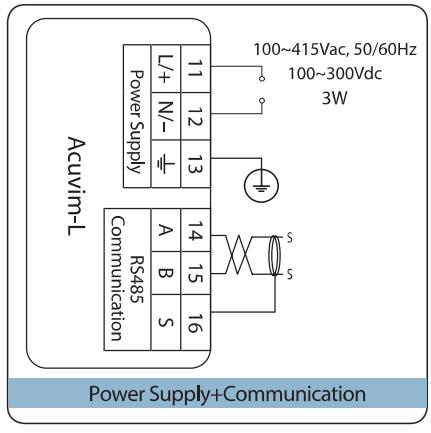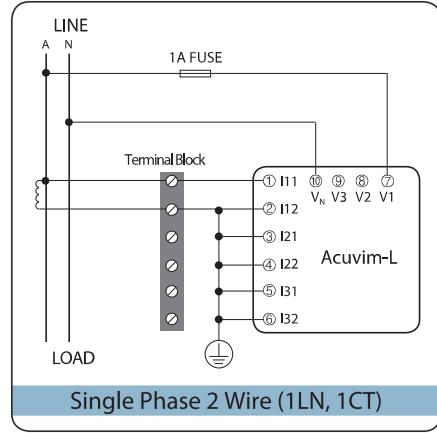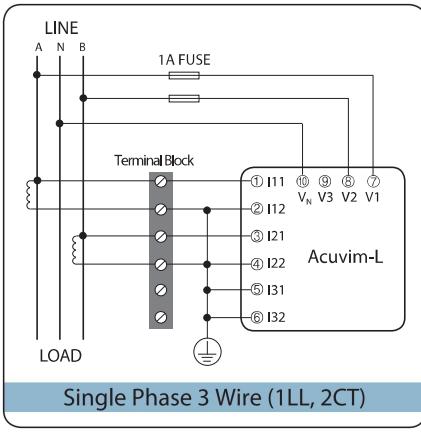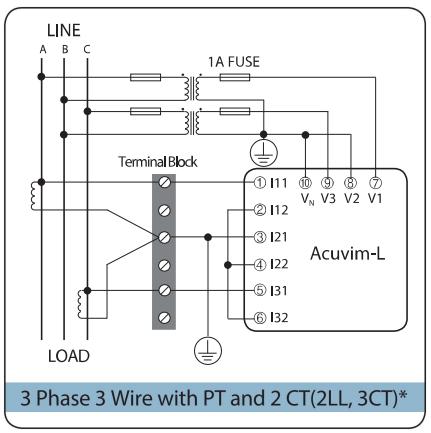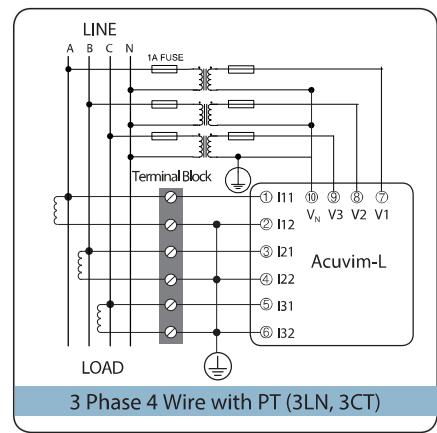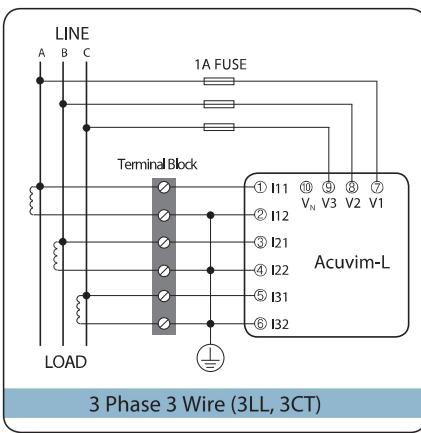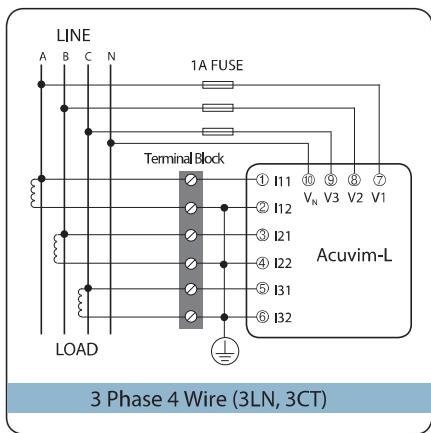


Note: 1. “**” 2CT conugration is optional only in 3 Phase 3 Wire system; 2. “#” Wiring diagram is only applicable to Acuvim BL.

TYPICAL WIRING RCT/mV/mA CURRENT INPUT

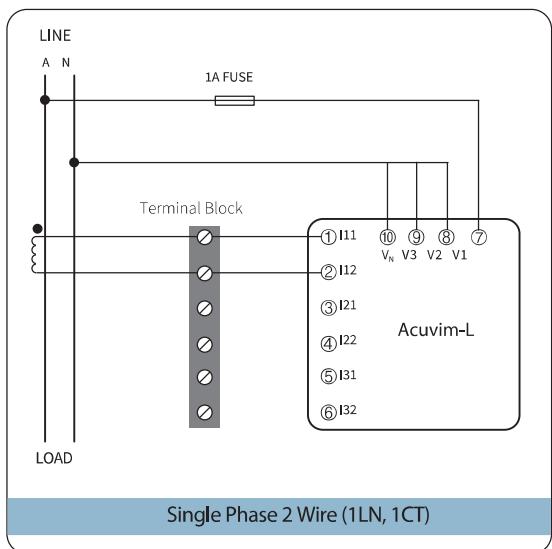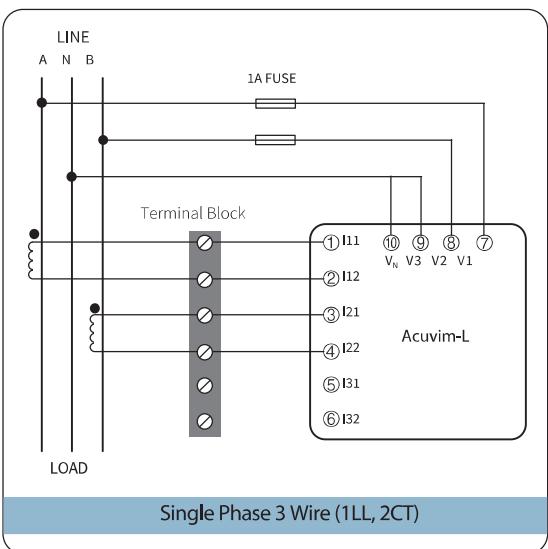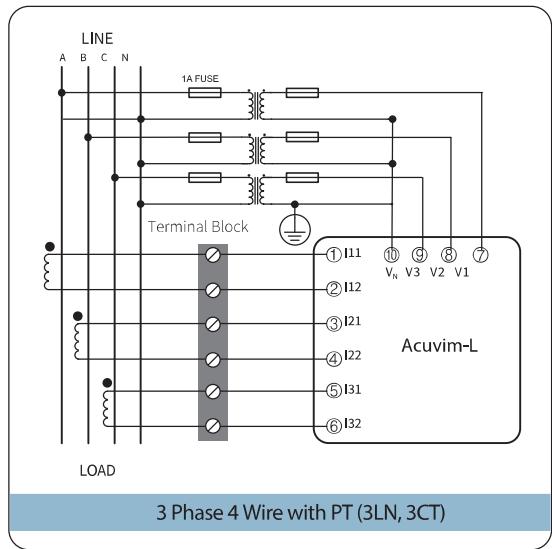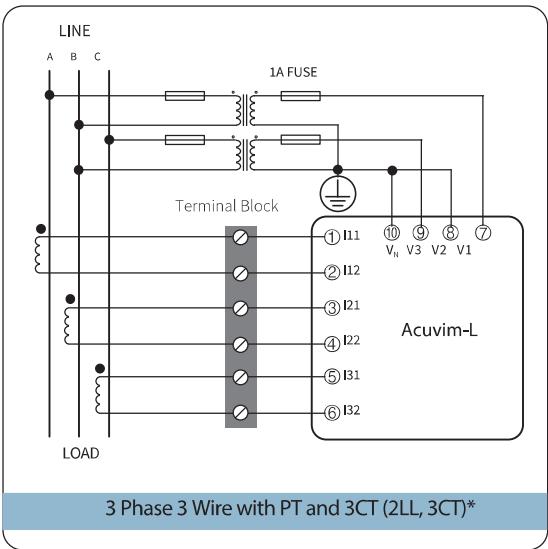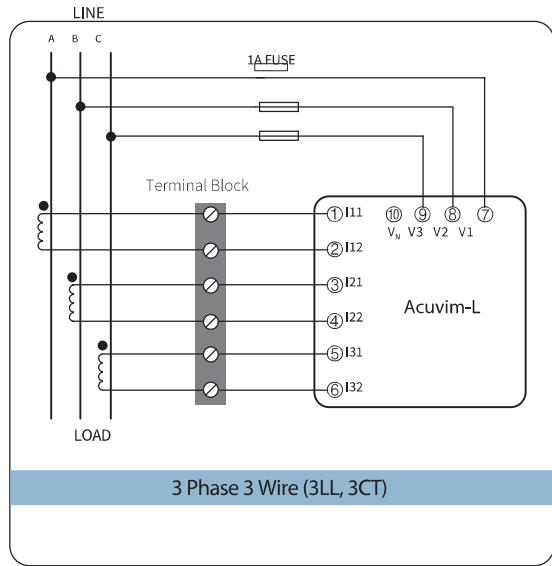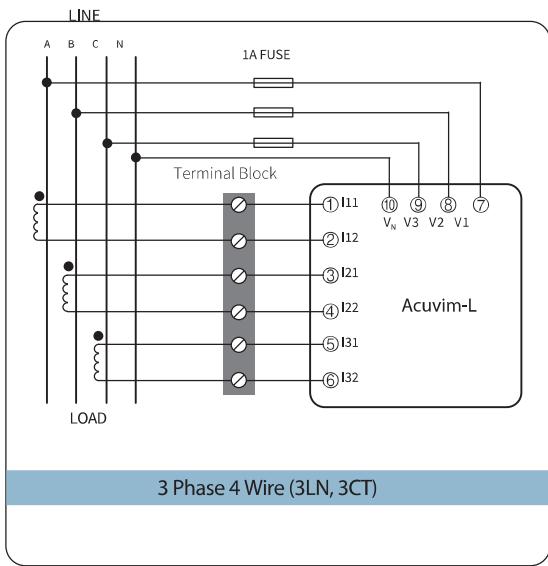

DIMENSIONS

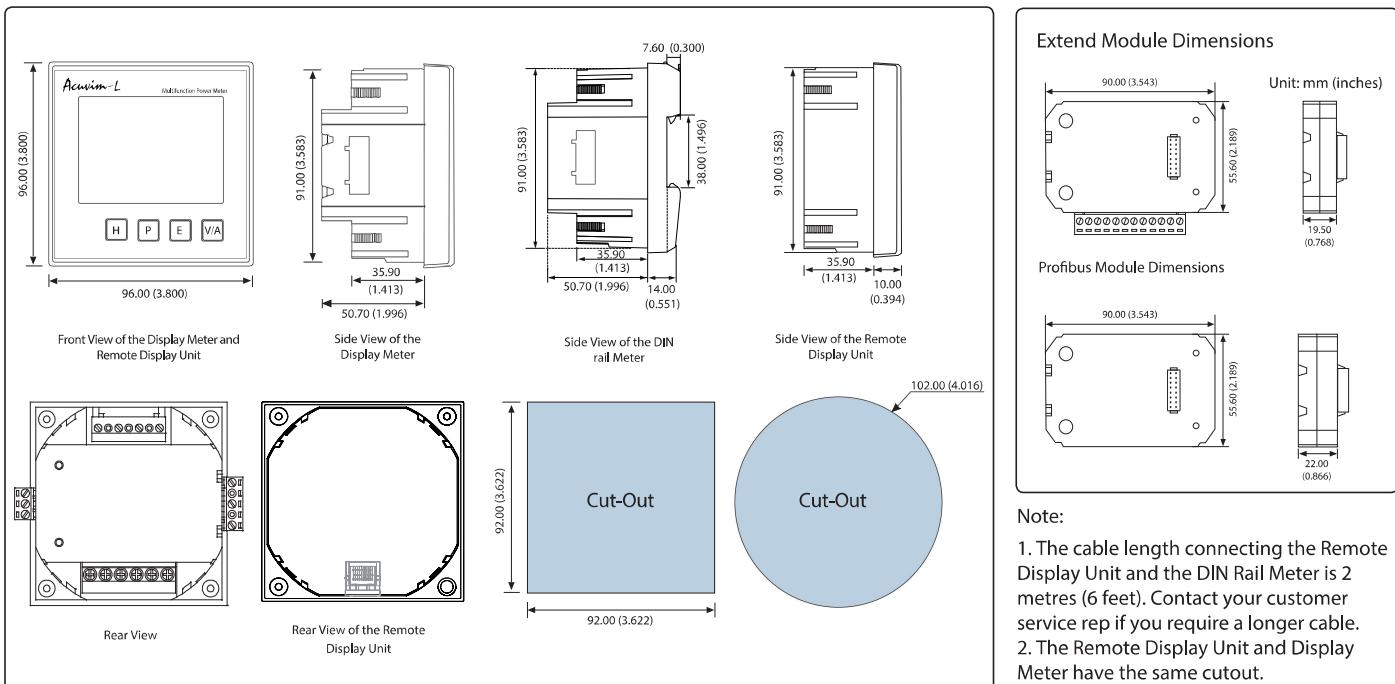

Note:

1. The cable length connecting the Remote Display Unit and the DIN Rail Meter is 2 metres (6 feet). Contact your customer service rep if you require a longer cable.
2. The Remote Display Unit and Display Meter have the same cutout.

IP66/NEMA4X Protection Cover


The **IP66/NEMA4X Protection Cover** is designed for Acuvim-L, Acuvim II and all 96mm by 96mm display panel meters; it increases the IP environmental rating of a meter's display to IP66 or NEMA 4X regardless of the original rating of display.

The IP66/NEMA4X Protection Cover prevents damage from dust, water, and other elements when paired with Acuvim II and L series meters they become an effective solution for high protection-required applications, such as outdoor panels.



Note: To use the display keys, easily remove the IP66/NEMA4X Protection Cover as the seal is made of durable - tight grip rubber. Simply push back in place when you're done.

DIMENSIONS

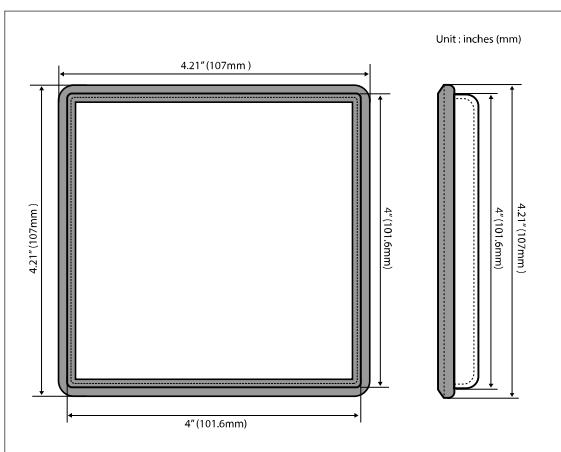

SPECIFICATIONS

METERING				OPERATING ENVIRONMENT			
Parameters	Accuracy	Resolution	Range	CONTROL POWER			
Voltage	0.5%	0.1V	20V 1000kV ~	Universal	-25°C to 70°C	-40°C to 85°C	5% to 95% non-condensing
Current	0.5%	0.001A	0 ~ 50000A	AC/DC Control Power	AC or DC	2	Pollution Degree
Current Demand	0.5%	0.001A	0 ~ 50000A	Operating Range	100~415Vac, 50/60Hz, 100~300Vdc	Burden	3W
Power	0.5%	1W	-9999MW 9999MW ~	Withstand	3250Vac, 50/60Hz for 1 minute		
Reactive Power	0.5%	1Var	-9999Mvar 9999Mvar ~				
Apparent Power	0.5%	1VA	0 ~ 9999MVA				
Power Demand	0.5%	1W	-9999MW 9999MW ~				
Reactive Power Demand	0.5%	1Var	-9999Mvar 9999Mvar ~				
Apparent Power Demand	0.5%	1VA	0 ~ 9999MVA				
Power Factor	0.5%	0,001	-1.0 ~ 1.0				
Frequency	0.2%	0.01Hz	45.00 ~ 65.00Hz				
Energy	0.5%	0.1kWh	0 ~ 99999999.9kWh				
Reactive Energy	0.5%	0.1kvarh	0 ~ 99999999.9kvarh				
Apparent Energy	0.5%	0,1 V ah	0 ~ 99999999.9kVAh				
Harmonics	1.0%	0.01%					
Meter Running Time		0.1hrs	0 ~ 99999999.9hrs				
Load Running Time		0.1hrs	0 ~ 99999999.9hrs				
COMMUNICATION							
RS-485 (Optional) Modbus®-RTU Protocol 2-wire connection, Half-duplex, Isolated 1200 to 38400 baud rate Sencond RS485 (Acuvim-DL and Acuvim-EL can optional)				STANDARD COMPLIANCE			
PROFI-BUS (Optional) PROFIBUS-DP/V0 Protocol Work as PROFIBUS slave, baud rate adaptive, up to 12M Typical input bytes: 32, typical output bytes: 32 PROFIBUS standard according to EN 50170 vol.2				Measurement Standard	IEC 62053-22 Class 0.2S, IEC 62053-23 Class 2	Environmental Standard	IEC 60068-2
				Safety Standard	IEC 61010-1, UL 61010-1, IEC 61557-12	EMC Standard	IEC 61000-4/-2-3-4-5-6-8-11, CISPR 22, IEC 61000-3-2, IEC 61000-6-2/4
				Outlines Standard	DIN 43700/ANSI C39.1		
INPUT							
Current Inputs (Each Channel)							
Nominal Current		5A / 1A		Mounting			
Metering Range		0 ~ 10 A ac / 0 ~ ac 2A		Current			
Withstand		20Arms continuous		Power Supply			
Burden		100Arms for 1 second, non-recurring		Extended Module	*		
Pickup Current		0.05VA (typical) @ 5Arms			X1: 4DI+2DO		
Accuracy		0.1% of nominal			X2: 4DI+2DO+Second RS485		
		0.5%			X3: Profibus		
					X4: 4DI+2DO+Profibus		
Voltage Inputs (Each Channel)							
Nominal Full Scale		400Vac L-N, 690Vac L-L (+20%)		P1: 100~415Vac, 50~60Hz			
Withstand		1500Vac continuous		100~300Vdc			
Input Impedance		2500Vac, 50/60Hz for 1 minute		P2: 20~60Vdc			
Metering Frequency		2Mohm per phase					
Pickup Voltage		45Hz~65Hz					
Accuracy		10Vac					
		0.5%					
Energy Accuracy							
Active	(according to IEC 62053-22)		classe 0.5s	D: Standard with LCD Display			
	(according to ANSI C12.20)		classe 0.5s	M: DIN rail mount (optional Remote Display to be added)			
Reactive	(according to IEC 62053-23)		classe 2				
Harmonic Resolution							
Metered Value		2nd~31st harmonics					
DIGITAL INPUT OPTION							
Digital Input (DI)							
Input Type		Dry Contact					
Input Resistance		4kΩ					
Pulse Frequency (Max)		100Hz, 50% Duty Ratio					
SOE Resolution		2ms					
DIGITAL OUTPUT OPTION							
Digital Output (DO)							
Voltage Range		(Photo-MOS)					
Load Current		0~250Vac/dc					
Output Frequency (Max)		100mA (Max)					
Isolation Voltage		25Hz, 50% Duty Ratio					
		2500V					
OPERATING ENVIRONMENT							
Operation Temperature		-25°C to 70°C					
Storage Temperature		-40°C to 85°C					
Relative Humidity		5% to 95% non-condensing					
Pollution Degree		2					
ORDERING INFORMATION							
* Note: 1. Extended Modules only supported by the Acuvim-DL and Acuvim-EL models. 2. Profibus module must be installed on the back of the meter FLRST before the other module is attached.							
REMOTE DISPLAY OPTION							
Remote Display Option Ordering Example: REM - DS1							
ACCESSORY							
IP66/NEMA4X — Environmental Protection Cover							
Accuenergy Corporation							
Los Angeles - Toronto - Beijing - Pretoria							
North America Toll Free: 1-877-721-8908							
Web: www.accuenergy.com							
Email: marketing@accuenergy.com							
Revision Date: Jun., 2020 Document #1030E1210							

ACCUENERGY

Accuenergy Corporation

