

Multimeasurement Meter **SENTINEL®**



introduction

SENTINEL Electronic Multimeasurement Meter

The SENTINEL meter is a solid-state, electronic, multimeasurement, polyphase meter of exceptional accuracy. This self-contained or transformer-rated meter is designed for use in commercial and industrial locations, including large industrial sites and substations. An advanced analog-to-digital sampling technique samples each incoming current and voltage waveform 32 times per cycle (60Hz). Voltage and current values are calculated every two cycles using true Root Mean Square (RMS) calculation. Volt-amperes are calculated by multiplying the RMS voltage value with the RMS current value, thus providing an arithmetic calculation for VA. The SENTINEL meter also allows for a vectorial calculation of VA.

features

Flexible Platform

- > Electronic circuit boards fit together to perform various functions
- > Transformer input for current and resistive divider input for voltage
- > Analog-to-digital conversion and measurement processing
- > Register, load-profile, real-time clock, and communications processing
- > Input and output board for pulse accumulation or event notification

Protocols

- > The SENTINEL meter uses PSEM (ANSI C12.18-1996) protocol
- > QDIP Protocol

Standard Features

- > Class 0.2 accuracy
- > 5 measurement levels
- > Upgradable firmware
- > Error and event logging
- > SiteScan onsite monitoring system
- > SiteScan Diagnostic Snapshots™
- > Flexible configuration for various metering applications
- > Autoranging power supply

features

Available Registers

- > Register data and program information are retained in non-volatile memory in the event of a power failure
- > Selection from hundreds of items on a liquid crystal display (LCD) that is programmable by the user
- > Programmable by the user through Itron PC-PRO+® Advanced, a 32 bit Windows® based meter programming software

Energy

- > Wh: delivered, received, net, unidirectional
- > VARh: delivered and received, net delivered, net received and 4 quadrant
- > VAh: vectorial and arithmetic, delivered, received and lagging
- > A²h: aggregate
- > V²h: aggregate
- > Ah: per phase and neutral
- > Vh: per phase and average

Demand

- > Instantaneous values updated every second
- > Maximum, present, previous, projected, cumulative, continuous cumulative and coincident demand values are available

Demand Register Types

- > Block and rolling demand intervals with programmable interval and subinterval lengths
- > Thermal demand calculations

Dependable Support

- > Itron backs the SENTINEL meter with the reliable support you expect from the leading solutions provider to electric utilities. Our engineers work with you to implement the SENTINEL meter in the field and tailor its software to provide the intelligent, real-time information you need.

Self-Read and Snapshot Data

- > Two sets of snapshot data, automatically read at demand reset
- > Four sets of self-read data, user programmable schedule
- > One set of self-read data, automatically read at season change (last season data)

Switchboard Ready™ Meter

- > Retrofits 13 Switchboard case styles
- > Retrofits 137 different devices

Power Quality

- > Voltage Quality:
 - *Phase to phase or phase to ground event detection
 - *3 levels of sags
 - *3 levels of swells
 - *3 levels of voltage imbalances
 - *3 levels of current imbalances
 - *3 classes of interruptions
- > Harmonics:
 - *Per phase instantaneous % THD V and % TDD I
 - *Prompt for peak demand current
 - *Per phase data is displayable
 - *ANSI and IEC calculation
 - *Harmonic Distortion Check

Ethernet Communications

- > PC-PRO+ Advanced 7.1 or higher
- > Fixed and dynamic IP addressing
- > Encryption support
- > Email On Event
 - * 26 User Configurable Event
- > Web page support

Internal Modem

- > The modem allows customers to remotely connect to the SENTINEL meter to program or read the meter.
- > It operates at a speed of 300/1200/2400 baud rates and is available for stand-alone or phone line sharing applications.
- > Off hook detection

Software

- > PC-PRO+ Advanced
- > HHF meter data file creation with PC-PRO+ Advanced version 7.0 or greater
- > EnergyAudit 4.3

I/O Network

- > The input and output options available are determined by the type of I/O board that is installed in the meter. The SENTINEL meter supports a maximum of 4 KYZ outputs, 1 (KY) low current/high current output, and 2 (KY) pulse or solid-state inputs.

Optional Features

- > Pulse outputs and inputs
- > MeterKey options: measurement level, TOU, load profile, power quality, bidirectional measurement, totalization
- > OEM Communication Option Boards
- > PF (avg., min., inst.)
- > RF ERT Modules: R300S (1 ERT), R300SD (2 ERTs), R300SD3 (3 ERTs)
- > Phone line thru cover
- > Three phase power supply
- > Class 320 amp meter (socket only)
- > RS-232/RS-485 (2 wire, 4 wire)
- > No potential links option

Voltage Input Rating

- > Automatic voltage-sensing power supply, available in single-phase or three-phase
- > Single-phase power supply operates over a voltage input range of 120-480 V
- > Three-phase power supply operates over a voltage input range of 57.7-277 V

Product Availability

	Transformer Rated	Self-Contained
Socket	Class 20 - Form 3S	Class 200 - Form 2S
	Class 20 - Form 4S	Class 200 - Form 12S
	Class 20 - Form 9S (8S)	Class 200 - Form 16S (14S, 15S, 17S)
	Class 20 - Form 45S (5S)	Class 320 - Form 2S
	Class 20 - Form 9S (8S)/46S	Class 320 - Form 12S
	Class 20 - Form 46S (6S)	Class 320 - Form 16S (14S, 15S, 17S)
	Class 20 - Form 56S (26S, 66S)	Class 150 - Form 16A (14A, 15A, 17A)
	Class 20 - Form 66S (26S)	
A-Base	Class 20 - Form 10A (9A)	
	Class 20 - Form 45A (5A)	
	Class 20 - Form 46A (6A)	
Switchboard	Class 20 - Form 48A (8A)	
	Class 20 - Form 9F (8A)	
	Class 20 - Form 45F (5A)	
	Class 20 - Form 46F (6A)	

specifications

Accuracy Tests

Measured Quantity	Phase Angle %	Error of Reading
Volts (0.75Vn-1.15Vn)	All Phase Angles	+/- 0.2%
Amps (0.1A-0.25A)	All Phase Angles	+/- 0.4%
Amps (0.25A-20A)	All Phase Angles	+/- 0.4%
Amps (2.5A-200A)	All Phase Angles	+/- 0.4%
Watts (0.05A-0.25A)	0°, 180°	+/- 0.4%
Watts (0.25A-20A)	0°, 180°	+/- 0.2%
Watts (2.5A- 200A)	0°, 180°	+/- 0.2%
Watts (0.05A-0.5A)	-60°, +60°, -120°, +120°	+/- 0.5%
Watts (0.05A-20A)	-60°, +60°, -120°, +120°	+/- 0.3%
Watts (5.0A-200A)	-60°, +60°, -120°, +120°	+/- 0.3%
Vars (0.05A-0.25A)	-90°, +90°	+/- 0.4%
Vars (0.25A-20A)	-90°, +90°	+/- 0.2%
Vars (2.5A-200A)	-90°, +90°	+/- 0.2%
Vars (0.05A-0.5A)	-30°, +30°, -150°, +150°	+/- 0.5%
Vars (0.5A-20A)	-30°, +30°, -150°, +150°	+/- 0.3%
Vars (5.0A-200A)	-30°, +30°, -150°, +150°	+/- 0.3%
VA Arith. (0.05A-0.25A)	All Phase Angles	+/- 0.8%
VA Arith. (0.25A-20A)	All Phase Angles	+/- 0.6%
VA Arith. (2.5A-200A)	All Phase Angles	+/- 0.6%
VA Vec (0.1A-0.5A)	-60°, +60°, -120°, +120°, -30°, +30°, -150°, +150°	+/- 0.6%
VA Vec (0.5A-20A)	-60°, +60°, -120°, +120°, -30°, +30°, -150°, +150°	+/- 0.4%
VA Vec (5.0A-200A)	-60°, +60°, -120°, +120°, -30°, +30°, -150°, +150°	+/- 0.4%

In Conformance with the ANSI C12.20 standard for Class 0.2 meters.

Specifications

Power Requirements	Voltage Ranges: -20% to +10% of nominal voltage (1 or 3 phase) Frequency: 50-60 Hz	Operating Voltage: \pm 20% Operating Range: 45 Hz to 65 Hz
Load Profile/TOU Battery	Voltage: 3.6 V nominal Carryover: 12 years minimum	Operating Range: 3.4 V- 3.8 V Shelf Life: 25 years minimum
Time	Line Sync: Power line frequency Crystal Sync: \pm 0.003% @25°C; \pm 0.02% over full temperature range	
Operating Environment	Temperature: -40° to +85°C Humidity: 0% to 95% non-condensing Transient / Surge Suppression: ANSI C37.90.1-1989 FCC Part 15, Class B ANSI C62.41-1991	
Accuracy	ANSI C12.20:1997 for class 0.2 meters	
Characteristic Data	Starting Current:	0.005 amps (Class 20) 0.050 amps (Class 200) 0.080 amps (class 320)
Burden Data	Voltage 120 Voltage 240 Voltage 277 Voltage 480	Watts: 1.3 Watts: 1.6 Watts: 1.7 Watts: 2.4 VA 2.2 VA 3.1 VA 3.4 VA 5.2

Accuracy Data

The SENTINEL meter is a +/-0.2 accuracy device capable of displaying a wide range of register information as well as complying with the requirements of ANSI C12.20: 1997 for Class 0.2 meters.

OEM Communication Options Available

- > SmartSynch® GPRS
- > Trilliant NCTR801 telephone modem
- > Motorola™ Canopy (works with SENTINEL Meter with Ethernet Communications Board)
- > BlueSpan GPRS
- > Trilliant NCGR801 GPRS
- > Trilliant NCXR801 CDMA/1xRTT
- > Trilliant NCIR801 iDEN®
- > Trilliant NCDR801 DataTAC®
- > DCSI CMT Power Line Carrier

OEM Communication Options Pending

- > ORBCOMM satellite modem
- > Tantalus
- > Others to be named soon

Technical Data

Conforms to:

- > ANSI C12.1: 1995
- > ANSI C12.19: 1997
- > ANSI C12.20: 1997
- > ANSI C12.21: 1999

Surge, Impulse and RF Interference


- > ANSI C37.90.1: 1989
- > ANSI C62.41: 1991
- > FCC Part 15 (Class B)

Reference Information

- > SENTINEL Meter Technical Reference Guide
- > SENTINEL Meter Overview Brochure
- > SENTINEL Meter Specification Sheet
- > SENTINEL Meter Communication Option Specification Sheets
- > Order Specification Form
- > Site Analysis Guide
- > Electricity Price Bulletin

specifications

SENTINEL® A-Base Meter

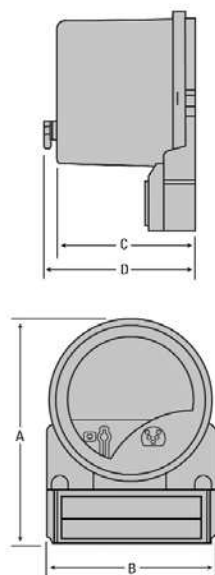


Dimensions for A-Base

A	B	C	D
9.46"	7.28"	5.90"	6.44"
24.0 cm	18.48 cm	14.97 cm	16.35 cm

Shipping Weights for A-Base

Net Weight	Gross Weight (Meter & Carton)
5.7 lbs (2.6 kg)	9.3 lbs (4.2 kg)

SENTINEL® Socket Meter

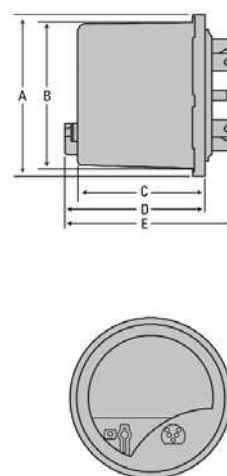

Dimensions for Socket Meter

A	B	C	D	E
6.95"	6.31"	5.46"	6.00"	7.30"
17.65 cm	16.03 cm	13.87 cm	15.24 cm	18.54 cm

Shipping Weights for Socket Meter

Net Weight	Gross Weight (Meter & Carton)	Gross Weight (4 Pack)
4 lbs (1.8 kg)	7.5 lbs (3.4 kg)	20.2 lbs (9.2kg)

profile

Itron Inc.

Itron is a leading technology provider and critical source of knowledge to the global energy and water industries. Nearly 3,000 utilities worldwide rely on Itron technology to deliver the knowledge they require to optimize the delivery and use of energy and water. Itron delivers value to its clients by providing industry-leading solutions for electricity metering; meter data collection; energy information management; demand response; load forecasting, analysis and consulting services; distribution system design and optimization; web-based workforce automation; and enterprise and residential energy management.

To know more, start here: www.itron.com



Corporate Headquarters

2111 North Molter Road
Liberty Lake, WA, U.S.A. 99019
Phone: 1.800.635.5461
Fax: 1.509.891.3355
www.itron.com

Itron Inc.

Oconee Electricity Metering

313-B North Highway 11
West Union, SC 29696, USA
Phone: 1.864.638.8300
Fax: 1.864.638.4950