

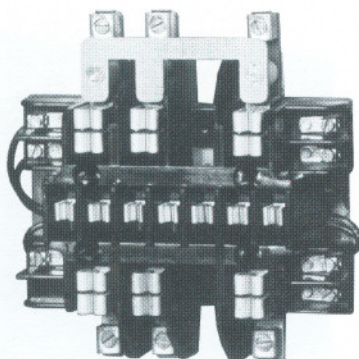


**20 AMP—4,5,6,7,8 & 13 TERMINAL—TRANSFORMER RATED
RINGLESS—RING TYPE—600 VAC**

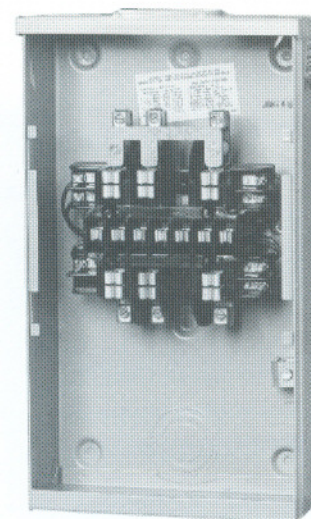

Block Assembly for UC7545
(Prefix "UC" designates
sleeve connector for
#4 wire maximum)

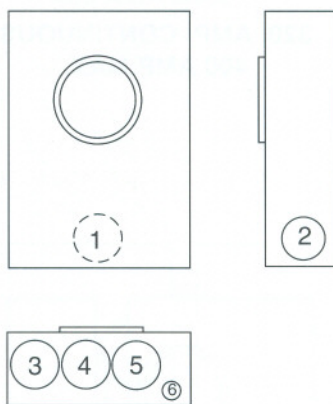

UC7545-RL

RINGLESS—PLUNGER TYPE BYPASS

NO. OF TERMS	METER FORM	CATALOG NUMBER	HUB	CONNECTORS CU	BY- PASS	DIMENSIONS			CONCENTRIC K.O.'S					
						D"	W"	H"	1	2	3	4	5	6
4	1S / 2S	UC1288-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
5	3S	UC1290-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
6	4S	UC1299-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
7	7,14,15 & 24S	UC7233-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
8	5S	UC7235-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
13	6,8,9S & (ALT) 10S	UC7237-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄

RING TYPE—PLUNGER TYPE BYPASS

NO. OF TERMS	METER FORM	CATALOG NUMBER	HUB	CONNECTORS CU	BY- PASS	DIMENSIONS			CONCENTRIC K.O.'S					
						D"	W"	H"	1	2	3	4	5	6
4	1S / 2S	UC1289-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
5	3S	UC1291-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
6	4S	UC1300-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
7	7,14,15 & 24S	UC7546-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
8	5S	UC7544-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄
13	6,8,9S & (ALT) 10S	UC7545-RL	H.O.	#14 - #4 MAX	YES	3 ⁵ / ₁₆	8	14	1 ¹ / ₂	1 ¹ / ₂	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄	1 ¹ / ₄

HUBS: For proper hub selection see the hub suffix chart on the accessory page.

BYPASS: Plunger type bypass automatically closes when meter is removed.

CONNECTORS: Units are supplied with sleeve type connectors (#4 max.) If compression type connectors (#10) are preferred, change the catalog prefix to "S" (i.e. UC1289-XL becomes S1289-XL.) The "S" prefix also designates non-U/L.

SERVICE: Units are rated for overhead or underground service.

