

NA3 Digital Meters With Bargraph

Features

MOD
BUS

RTC

Linear
Chart

Password
protection

IP
40

Input

DC

0.20
mA

60 mV

Password
protection

0..10
V

Outputs

0..20
mA

0..10
V

RS
485

Galvanic Isolation


Supply

RS
485



- Universal input for the measurement of d.c. current, d.c. voltage and temperature,
- 3 or 7-colour bargraph,
- Programming of bargraph colour depending on the measured quantity value,
- Signalling of set alarm value over flow,
- Storage of measured signal in programmed time segments (750 samples),
- Current or voltage analog output,
- Communication in SCADA systems (RS485/Modbus interface RTU and ASCII).

Example of application

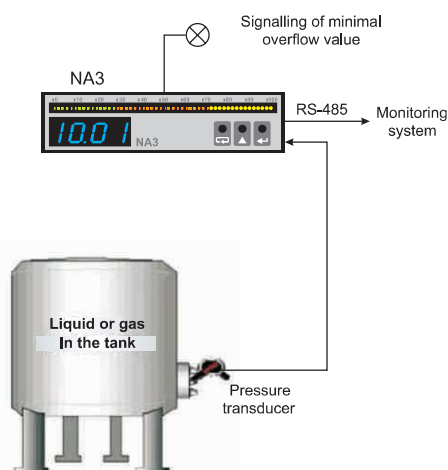

Inputs

Kind of input	Measuring range
Pt100	-200...850°C
Pt500	-200...850°C
Pt1000	-200...850°C
J (Fe-CuNi)	-30...1100°C
K (NiCr-NiAl)	-50...1370°C
N (NiCrSi-NiSi)	-100...1300°C
E (NiCr-CuNi)	-20...850°C
R (PtRh13-Pt)	0...1760°C
S (PtRh10-Pt)	0...1760°C
T (Cu-CuNi)	-50...400°C
Resistance	0...400 Ω, 0...4000 Ω
Voltage	0...60 mV, Rinp. > 9 MΩ 0...3 V, Rinp. > 4 MΩ 0...10 V, Rinp. > 4 MΩ 0...200 V, Rinp. > 4 MΩ 0... 600 V, Rinp. > 4 MΩ
Current	0...5 mA, Rinp. = 4 Ω 0...20 mA, Rinp. = 4 Ω 0...2 A, Rinp. = 10 mΩ ± 10% 0...5 A, Rinp. = 10 mΩ ± 10%

Outputs

Kind of output	Features
Analog output	• galvanic isolation with resolution 0.025% of range; current programmable 0/4...20 mA, load resistance ≤ 500 Ω or voltage programmable 0...10 V, load resistance ≥ 500 Ω, output response time : 100 ms.
Relay output	• 1 or 2 relays; NOC voltage less contacts, maximal load-carrying capacity: - voltage : 250 V a.c., 150 V d.c. - current : 5 A30 V d.c., 250 V a.c. - resistance load : 1250 VA, 150 W
Open collector (OC) type	• voltage less of OC type with npn transistor, maximal load : 25 mA, range of appended voltages: 5...24 V d.c.
Digital	• interface type: RS-485; transmission protocol: MODBUS ASCII (8N1, 7E1, 7O1), RTU (8N2, 8E1, 8O1, 8N1); baud rate: 2400, 4800, 9600 bit/s.

external features

Readout field	NA3-F	4 LED displays with 7 segments, digits of 7mm high, indication range -1999...9999 multicoloured bargraph of 82 mm long, 45 segments in a 3-colour version or with 25 segments in 7-colour version
	NA3-B	multicoloured bargraph as above
	NA3-D	4 LED displays with 7 segments, digits of 14 mm high, 3 alarm diodes, indication range as above.
Weight	< 0.3 kg	
Over all dimensions	96 '24 '125 mm	panel cut-out : 92 ^{0.5} '22.2 ^{+0.5} mm
Protection grade (acc. to EN60529)	IP40 from frontal side	IP20 from terminal side

Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YW
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139



Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903

Rated Operating Conditions

Supply voltage	95...253 V a.c. / d.c., 20...40 V a.c. / d.c.	Power consumption <8VA
Temperature	ambient : -10...55°C	Storage : -25...85°C
Relative humidity	< 95%	Condensation inadmissible

Safety and Compatibility Requirements

Electro magnetic compatibility	noise immunity	acc. to EN61000-6-2
	noise emissions	acc. to EN61000-6-4
Safety requirements		acc. to EN61010-1

Table 1. Execution code

Digital Panel Meter with Bargraph - NA3	X	X	X	X	X	X	X	XX	X
Meter version:									
With a bargraph and digital display	F								
With a bargraph*	B								
With a digital display	D								
Bargraph colour:									
Without bargraph (NA3D)	0								
3-colour bargraph (R, G, R+G)	T								
7-colour bargraph (R, G, B, R+G, R+B, G+B, R+G+B)	M								
Display colour:									
Without display	0								
Red	R								
Green	G								
Blue	B								
Input signal:									
universal input	U								
Analog output signal:									
Lack	0								
Current programmable 0/4...20 mA	1								
Voltage programmable 0...10 V	2								
Additional output:									
Lack*	0								
RS-485 digital output + 1 relay	1								
RS-485 digital output + 1 output of OC type	2								
2 relays*	3								
2 outputs of OC type*	4								
Supply:									
95...253 V AC / DC	1								
20...40 V AC / DC	2								
on order**	X								
Kind of terminals:									
Socket-screw plug	0								
Version:									
Standard	00								
Custom-made**	XX								
Acceptance tests:									
Without an extra quality inspection certificate	8								
Without an extra quality inspection certificate	7								
Acc. to customer's request**	X								

* - in case of a NA3-B X X X X (0, 3 or 4), one must fill the table 2
 ** - after agreeing with the manufacturer

Connection Diagrams

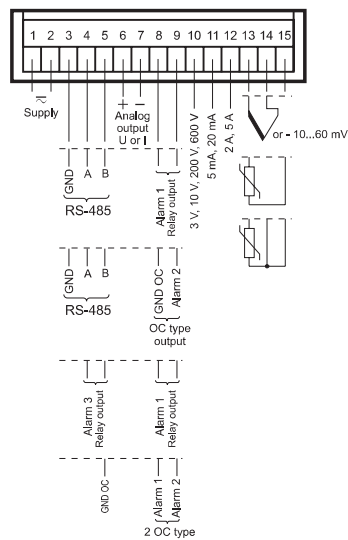


Fig. 1 External connections of the NA3 meter.

Programmable parameters of the NA3 meter Table 2.

Input	Input type	tYP
	Mathematical functions	Func
	Kind of compensation	Con
	Measuring averaging time	Cnt
	Displayed characteristic	Indi
Bargraph	Measured value	d_H1
	Displayed value	d_Y1
	Measured value	d_H2
	Displayed value	d_Y2
Alarm 1	Bargraph type	tYPb
	Bargraph colour	coLr
	Lower bargraph threshold	brL
	Upper bargraph threshold	brH
Alarm 2	Lower alarm threshold	PrL
	Upper alarm threshold	PrH
	Alarm type	tYPA
	Delay of alarm operation	dLY
	Support of alarm signalling	HOLd
Alarm 3	Colour of the lower threshold alarm index	CurL
	Colour of the upper threshold alarm index	CurH
Output	Lower alarm threshold	PrL
	Upper alarm threshold	PrH
	Alarm type	tYPA
	Delay of alarm operation	dLY
	Support of alarm signalling	HOLd
	Colour of the lower threshold alarm index	CurL
	Colour of the upper threshold alarm index	CurH
	Output characteristic	IndO
	Displayed value	d_H1
	Value on the analog output	O_Y1
	Displayed value	d_H2
	Value on the analog output	O_Y2
	RS-485 baud rate	bAud
	Kind of RS-485 transmission	trYb
	Device address	Adr

See Also



Temperature and humidity transducers P18 i P18L types.



Programmable transducer of temperature, resistance, voltage from shunt and standard signals - P20



N30 digital meters with a 3-colour display and free LP Config program.

OUR OFFER



www.sifamtinsley.com/uk

For more information about SIFAM's products please visit our website

Sifam Tinsley Instrumentation Ltd
 Unit 1 Warner Drive,
 Springwood Industrial Estate
 Braintree, Essex, UK, CM72YW
 E-mail: sales@sifamtinsley.com
 Web: www.sifamtinsley.com/uk
 Contact: +44(0)1803615139



Sifam Tinsley Instrumentation Inc.
 3105, Creekside Village Drive,
 Suite No. 801, Kennesaw,
 Georgia 30144 (USA)
 E-mail Id : psk@sifamtinsley.com
 Web : www.sifamtinsley.com
 Contact No. : +1 404 736 4903

Ordering Example:

The code: NA3 - F T R U 0 1 1 0 0 0 8 means:

- NA3 - digital meter with bargraph of NA3 type,
- F - with a bargraph and digital display,
- T - with a 3-colour display,
- R - red display colour,
- U - universal input,
- 0 - lack of analog output signal,
- 1 - additional output : RS-485 digital output + 1 relay,
- 1 - supply voltage : 95...253 V a.c. / d.c.,
- 0 - socket-screw plug,
- 00 - standard version,
- 8 - without extra quality requirements.