

P30U TRANSDUCER OF TEMPERATURE AND STANDARD SIGNALS

Features

- MOD BUS Slave
- MOD BUS Master
- MOD BUS Monitor
- eCon Program
- SD/SDHC
- Firmware upgrade
- 21 points character
- RTC
- Password protection
- Ethernet
- www ftp

Input

- °C
- DC
- RS 485

Output

- RS 485

Galvanic Isolation

- Supply

- RS 485

- Ethernet

Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YW
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139



Sifam Tinsley Instrumentation Inc.
3105 Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903




NOTICE!
NEW
func?ons!



- Universal measuring input.
- Version: standard, with SD card, with Ethernet and internal memory
- Mathematical functions, i.e. median filter function on measured value
- Individual characteristic (up to 21 points).
- 1 or 2 (option) alarm output.
- Built-in power supply of object transducers 24V d.c. (option).
- RS-485 interface Modbus RTU Slave, RTU Master or Monitor.
- Modbus TCP Slave (option).
- Possibility to record one measuring value and simultaneously up to 50 read-out/ written values via RS-485 Modbus Master.
- Data recording in internal memory, up to 4MB or in external SD/SDHC card or internal file system memory (8 GB) (op?on).
- Transducer programmable using buttons, eCon freeware (through RS-485 or Ethernet) or any web browser (through Ethernet).
- Firmware upgradeable by the user.

Example Of Application

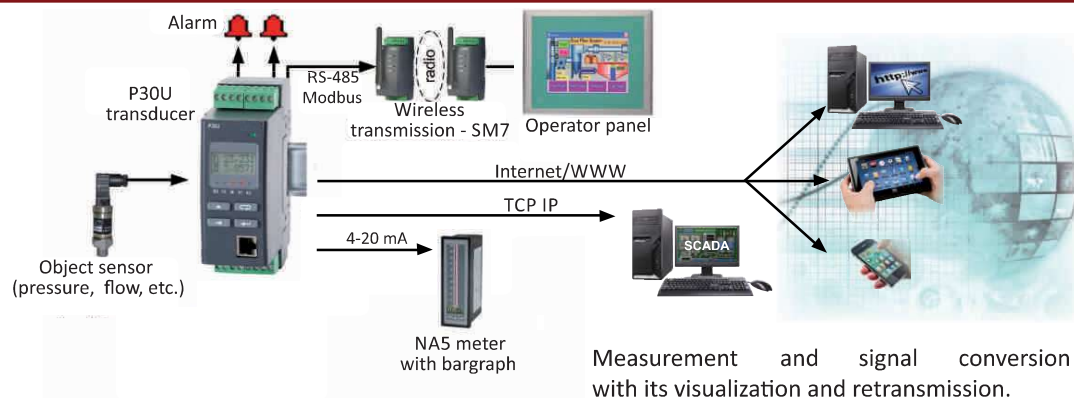

Input

Input type	Nominal measuring range Z	Coefficient k *	Input type	Range	Minimal sub-range with class preservation
Voltage 10 V	-10...10 V	4	Thermocouple J type	0...400 °C	1
Voltage 24 V	-24...24 V	5	Thermocouple K type	-200...1200 °C	2
Current	-20...20 mA	10	Thermocouple S type	0...400 °C	1
Resistance 400	0...400	4	Thermocouple N type	-200...1370 °C	2
Resistance 2000	0...2000	2	Thermocouple E type	0...1760 °C	2
Resistance 5500	0...5500	2	Thermocouple R type	-20...420 °C	1
Pt100	-200...850 °C	5	Thermocouple T type	-200...1300 °C	1
Pt250	-200...600 °C	4	Thermocouple B type	0...1760 °C	2
Pt500	-200...850 °C	3			
Pt1000	-200...850 °C	3			
Ni100	-60...180 °C	4			
Ni1000	-60...150 °C	2			
Ni100-LG	-60...180 °C	1			
Ni1000-LG	-60...180 °C	2			
Cu100	-50...180 °C	1			
	-5...20 mV	1			
	-75...75 mV	4			
	-200...200 mV	4			

In the Master mode of RS-485 interface, the transducer can poll up to 50 registers from one device, with implemented Modbus protocol, using RS-485 interface. In this mode, it is not possible to poll the transducer by another Master device.

In the Master mode of RS-485 interface, the transducer can monitor activity of the RS-485 connection and react (accept as a measured value) to the value of the frame of the selected slave device. The transducer can analyze up to 50 registers from one device. In this mode, it is not possible to poll the transducer by another Master device.

Accuracy class = 0.1 with the exception of N, E and T thermocouples, where accuracy class = 0.2 and S, R, and B thermocouples, where accuracy class = 0.5.

k* coefficient of narrowing the measuring range with keeping the accuracy class.

NOTE: Minimal sub-range with keeping the accuracy class is z/k (it is freely programmable).

Example: 10 Z = -10...10V;

k = 10

Z/k = 2 V, so the minimal sub-range can be e.g. -1...1 V; 0...2 V; 5...7 V

Output

Output type	Properties	Remarks
Analog	Current: 0/4...20 mA, load resistance $\leq 500 \Omega$ Voltage: 0...10 V, load resistance $\geq 500 \Omega$	accuracy class: 0.1
Relay	1 or 2 relays; voltageless contacts – NO – maximum load 5A 30V d.c., 250V a.c.	
Supplying output	24 V d.c. / 30 mA (op?on)	

Digital Interface

Interface type	Protocol	Baud rate
RS-485	Modbus RTU: 8N2, 8E1, 8O1, 8N1; Address 1...247	4.8, 9.6, 19.2, 38.4, 57.6, 115.2, 230.4, 256 kbit/s

External Features

Overall dimensions	45 x 120 x 100 mm	
Weight	< 0.25 kg	
Protection grade	for housing: IP40/ IP30	for terminals: IP20
Readout field	LCD 2 x 8	


Rated Operating Conditions

Supply voltage	• 85...253 V d.c. / a.c. (40...400 Hz) • 20...40 V a.c. (40...400 Hz) or 20...60 V d.c.	Power consumption 6 VA
Temperature	ambient: -25...+55°C	storage: -30...+70°C
Relative humidity	25...95 %	inadmissible condensation
Working position	any	

Safety and Compatibility Requirements

Electromagnetic compatibility	noise immunity noise emissions	acc. EN 61000-6-2 acc. EN 61000-6-4
Isolation between circuits	basic	acc. EN 61010-1
Pollution level	2	
Installation category	III	acc. EN 61010-1
Maximal phase-to-earth voltage	• for supply circuits 300 V • for other circuits 50 V	
Altitude above sea level	< 2000 m	

Connection Diagram

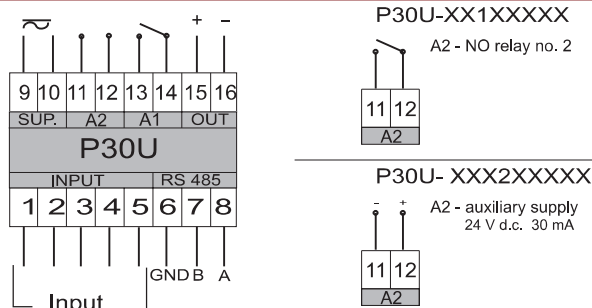

ORDERING

P30U -	X	XX	X	X	XX	X	X
Analog output:							
current (range 0/4...20 mA)	1						
voltage (0...10 V)	2						
Additional equipment:							
without any	0						
with external SD/SDHC slot	1						
with Ethernet interface and internal file system memory	2						
Additional output:							
NO relay, 5 A 30 V d.c., 250 V a.c.	1						
supply 24 V d.c. / 30 mA	2						
Supply:							
85...253 V a.c./d.c.	1						
20...40 V a.c., 20...60 V d.c.	2						
Version:							
standard						00	
custom-made*						XX	
Language version:							
Polish							P
English							E
other*							X
Acceptance tests:							
without extra requirements							0
with an extra quality inspection certificate according to customer's request*							1
							X

ACCESSORIES:

Capacity	Ordering code
1 GB	20-199-00-00023
2 GB	20-199-00-00025

Order example:

Code P30U-111100P0 means transducer execution with current output, slot for SD/SDHC card, with 2 alarm relays, 85...253 V a.c. / d.c. (40...400 Hz) power supply, standard version, Polish language, without extra requirements.

* after agreeing with the manufacturer.

See Also



Temperature sensors



N30U meter

OUR OFFER



For more information about SIFAM's products please visit our website www.sifamtinsley.com/uk

Sifam Tinsley Instrumentation Ltd.
Central Buildings, Woodland Close,
Old Woods Trading Estate,
Torquay, Devon, England, TQ27BB
Web: www.sifamtinsley.com/uk
Contact No.: +44 (0) 1803 615139



Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id: psk@sifamtinsley.com
Web: www.sifamtinsley.com
Contact No.: +1 404 736 4903