

Handy Calibrators

CA51/CA71

- Source and measure operations can be performed at the same time.
(Select from the following source signal and measurement signal options: voltage, current, resistance, thermocouple (TC), resistance temperature detector (RTD), frequency, pulse).
- AC voltages, including supply voltage, can be measured.
- Includes a wide array of additional functions.
- Easy operation.
- Compact size and Lightweight



Actual Size

CA51/CA71

Handy Calibrators

Comprehensive source/measure instruments for all your calibration and equipment checking needs at maintenance sites

Sensors and instruments require a wide variety of operation checks in the field. The CA71 Handy Calibrator is a small, lightweight, multifunction calibrator that can simultaneously source and measure voltage, current, resistance, TC, RTD, frequency, and pulse signals. The CA51 Handy Calibrator is a basic model with the same functions as the CA71 except TC and RTD measurement functions and online communication functions.

Simultaneous signal source and measurement capability

The CA71 lets you handle regular tests on TCs, RTDs and various other types of sensors and instruments, as well as operation checks when a problem has occurred. By itself it can source signals for input to equipment, and check output signal from equipment. With the CA71, you don't need to worry about synchronizing operations with other setting devices. (TC and RTD measurement functions are CA71 only.)



AC voltage (including supply voltage) measurement capability

In cases where numerous signal converters and other devices are mounted on a rack or panel, the Handy Calibrator can be used to check the input and output signals of each device, while simultaneously checking the power supply. There is no need for a separate multimeter to measure supply voltage.



A wide array of useful functions

•Source

Values set in steps of 4–20 mA
24V DC Power Supply to Transmitter

•Divided output (n/m) function

Output settings are divided, eliminating the need for bothersome calculations for percentage output.

•Autostep function

Changes the output value in step form based on the setting from the divided output (n/m) function. Changes can be sourced automatically every 10% or 25%.

•Online communication (CA71 only)

RS-232C-compliant optically isolated interface

•Sweep function

Linearly increases or decrease the output. The increasing/decreasing time can be set to either 16 or 32 seconds.

•Memory function

Source values and measurements forming individual value sets can be saved to or read from the Handy Calibrator's internal memory (maximum 50 value sets).


•Temperature monitor function

Easy operation

The Handy Calibrator incorporates rotary switches for simple handling. Just open the carrying case cover and connect the cables, and you're ready to take measurements.



Panel layout

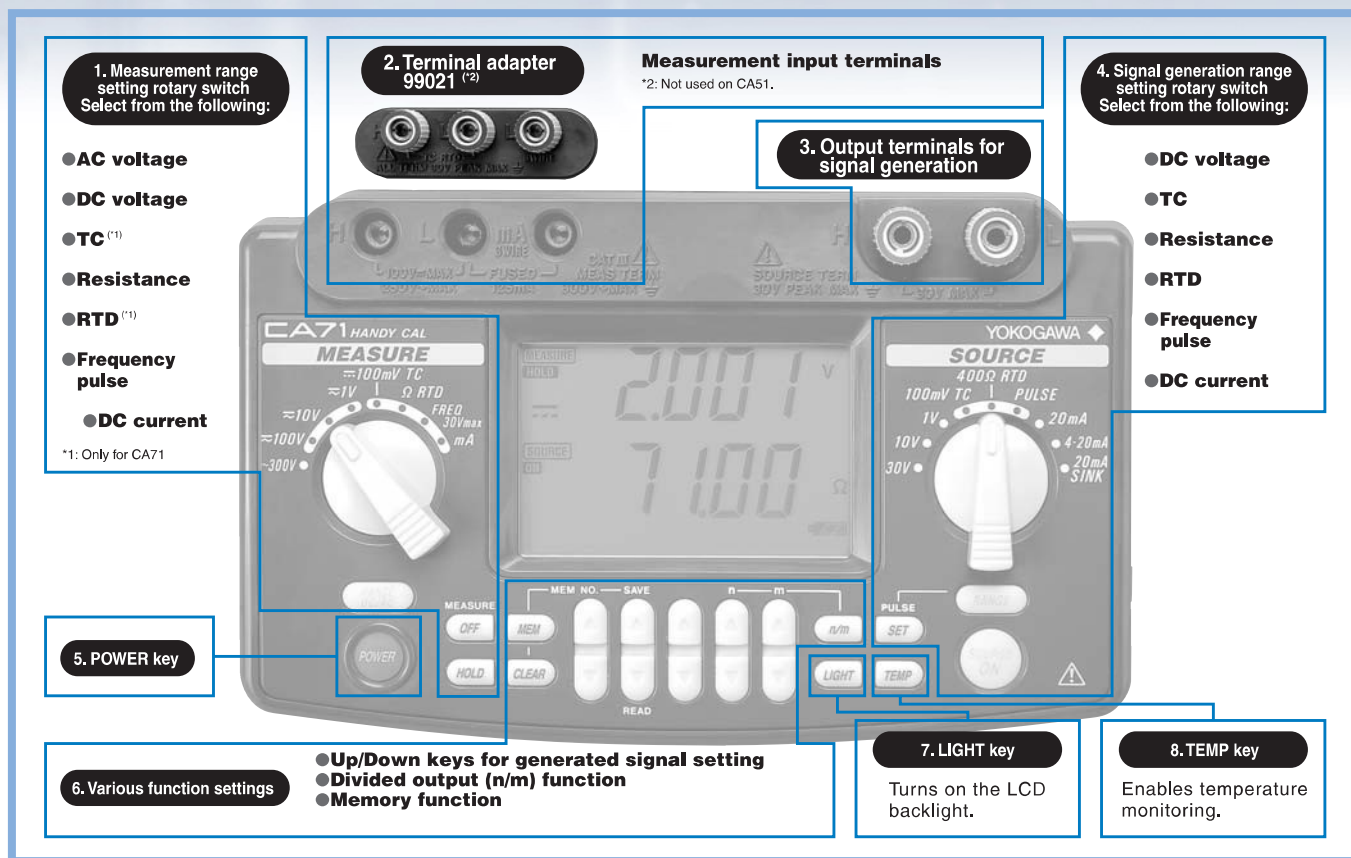

● Spare parts

Product	Source signal lead cable	Measurement lead cable	Carrying case	Terminal adapter
Model	98020	RD031	93016	99021
Remarks	One set, including one red cable and two black cables. Length: approximately 1.7 meters	One set, including one red cable and one black cable. Length: approximately 1.0 meter	The carrying case can hold the source signal and measurement lead cables, terminal adapter, four spare batteries, fuses, AC adapter, and user's manual.	Used in temperature measurement (for CA71).

● Optional accessories (sold separately)

Product	AC adapter	RJ sensor	Accessory carrying case	Communication cable (RS232)
Model	94013	B9108WA	B9108XA	91017
Remarks	120 V AC power supply adapter	For reference junction compensation	Can hold lead cables, RJ sensor, etc.	D-sub 9-pin (female)

● Handy Calibrator main unit

Product	CA71 Handy Calibrator	CA51 Handy Calibrator
Model	CA71	CA51
Standard accessories	All of the following are included: Source signal lead cables (one red, two black): 98020 Measurement lead cables (one red, one black): RD031 Carrying case: 93016 Terminal adapter for CA71: 99021 User's manual: IM CA71-E Four AA alkaline batteries: A1070EB x4	

● Related product

Product	Pressure Calibrator	Handy Calibrator	Process Multimeter	Process Clamp Meter
Model	CA700	CA150	CA450	CL420
Remarks	—	Multi-functional Hand-held Calibrator Source and measurement can be performed simultaneously. Loop power supply function Sink function	—	—

CA51 and CA71 Specifications

●Signal sourcing unit range and accuracy (for both CA51 and CA71)

Parameter	Reference	Range	Accuracy (23±5 °C per year)	Resolution	Remarks
DC voltage	100 mV	-10.00~110.00 mV	±(0.02% + 15 µV)	10 µV	
	1 V	0~1,100.0 V	±(0.02% + 0.1 mV)	0.1 mV	Maximum output: 5 mA
	10 V	0~11,000 V	±(0.02% + 1 mV)	1 mV	Maximum output: 10 mA
	30 V	0~30,00 V	±(0.02% + 10 mV)	10 mV	Maximum output: 10 mA *1
DC current	20 mA	0~24,000 mA	±(0.025% + 3 µA)	1 µA	Maximum load: 12 V
	4~20 mA	4/8/12/16/20 mA		4 mA	
mA SINK	20 mA	0.1~24,000 mA	±(0.05% + 3 µA)	1 µA	External power supply: 5~28 V
Resistance	400 Ω	0~400,00 Ω	±(0.025% + 0.1 Ω)	0.01 Ω	Excitation current: 0.5~5 mA *3
RTD	Pt100 *2	-200.0~850.0°C	±(0.02% + 0.1 mV)		If 0.1 mA, add 0.25 Ω or 0.6°C. Subject device input capacitance: 0.1 µF or less
	JPt100	-200.0~500.0°C	±(0.025% + 0.3°C)	0.1°C	
TC *4	K	-200.0~1372.0°C	±(0.02% + 0.5°C)		
	E	-200.0~1000.0°C	(-100°C or greater)		
	J	-200.0~1200.0°C	±(0.02% + 1°C) (-100°C or less)	0.1°C	
	T	-200.0~400.0°C	±(0.02% + 0.5°C)		
	N	-200.0~1300.0°C	(0°C or greater)		
	L	-200.0~900.0°C	±(0.02% + 1°C)		
	U	-200.0~400.0°C	(0°C or less)		
	R	0~1768°C	±(0.02% + 2.5°C) (100°C or less)		TC source accuracy does not include RJ sensor accuracy. RJ sensor specs Measurement range: -10~50°C Accuracy (when combined with main unit) 18~28°C: ±0.5°C Other than the above: ±1°C
	S		±(0.02% + 1.5°C) (100°C or greater)	1°C	
	B	600~1800°C	±(0.02% + 2°C) (1000°C or less) ±(0.02% + 1.5°C) (1000°C or greater)		
Frequency, pulse	500 Hz	1.0~500.0 Hz	±0.2 Hz	0.1 Hz	Output voltage: +0.1~15 V (zero base waveform)
	1000 Hz	90~1100 Hz	±1 Hz	1 Hz	Amplitude accuracy: ±(5% + 0.1 V)
	10 kHz	0.9 kHz~11.0 kHz	±0.1 kHz	0.1 kHz	Maximum load current: 10 mA
	Pulse cycle *5	1~99,999 cycles	—	1 cycle	Contact output (with 0.0 V amplitude setting, FET switch ON/OFF) Maximum open/close voltage/current: ±28 V/50 mA

Temperature coefficient: Accuracy shown above × (1/5)/°C

*1: Output up to 24 V/22 mA is possible when using the AC adapter.

*2: As per JIS C 1604-1997 (ITS-90). IPTS-68 may be selected through internal settings (DIP switch).

*3: Excitation current: If less than 0.1 mA to 0.5 mA, then add [0.025/s (mA)] Ω or [0.06/s (mA)]°C.

*4: As per JIS C 1602-1995 (ITS-90) (L and U are DIN specs).

K, E, J, T, N, R, S, and B may be switched to IPTS-68 through internal settings (DIP switch) (L and U are not switched).

*5: Frequency (interval between one pulse and another) and amplitude during pulse cycle generation may have the same range as during frequency generation.

●General specifications (for both CA51 and CA71)

Parameter	Specification
Signal generating unit response time	Approximately 1 second (time between start of voltage change and when voltage enters accuracy range)
Signal generating unit voltage limiter	Approximately 32 V
Signal generating unit current limiter	Approximately 25 mA
Divided output (n/m) function	Output = setting × (n/m) n = 0~m; m = 1~19; n ≤ m
Auto-step output function	n value sent automatically when n/m function selection is selected (two options: approximately 2.5 seconds/step or approximately 5 seconds/step)
Sweep function	Sweep time (two options: approximately 16 seconds or approximately 32 seconds)
Memory function	50 value sets (generated and measured values are stored as value sets with the same address (up to 50 value sets can be stored))
Measuring unit maximum input	Voltage terminal: 300 V AC Current terminal: 120 mA DC
Current terminal input protection	Fuses: 100 mA/400 V
Measuring unit ground voltage	Maximum 300 V AC
Measurement display updating rate	Approximately once per second
Serial interface	Enabled when communication cable (RS232) is connected; sold separately as optional accessory (CA71 only)
Display	Segmented LCD (approximately 76 mm × 48 mm)
Backlight	LED backlight; auto-off after one minute (from when LIGHT key is turned on)
Power supply	Four AA alkaline batteries, or special AC adapter (sold separately)
Battery life	Measurement off, output 5 V DC/10 kΩ or greater: Approximately 40 hours
	Simultaneous signal generation/measurement, output 5 V DC/10 kΩ or greater: Approximately 20 hours
	Simultaneous signal generation/measurement, output 20 mA/5 V: Approximately 12 hours (using alkaline batteries, with backlight off)
Consumed power	Approximately 7 VA (using 100 V AC adapter)
Conforming standards	EN61010-1, EN61010-2-030, EN61010-2-033, Measurement Category III 300 V, RD031: EN61010-031 EN61326-1 Class B, EN61000-3-2, EN61000-3-3, EN55011 Class B Group 1 EN50581 Monitoring and control instrument
Insulation resistance	Across input terminal and output terminal, 500 V DC, 50 MΩ or greater

●Measurement unit range and accuracy (for both CA51 and CA71)

Parameter	Reference	Range	Accuracy (23±5 °C per year)	Resolution	Remarks
DC voltage	100 mV	0~±110.00 mV	±(0.025% + 20 µV)	10 µV	Input resistance: 10 MΩ or greater
	1 V	0~±1,100.0 V	±(0.025% + 0.2 mV)	0.1 mV	
	10 V	0~±11,000 V	±(0.025% + 2 mV)	1 mV	Input resistance: Approximately 1 MΩ
	100 V	0~±110,00 V	±(0.05% + 20 mV)	0.01 V	
DC current	20 mA	0~±24,000 mA	±(0.025% + 4 µA)	1 µA	Input resistance: Approximately 14 Ω
	100 mA	0~±100,00 mA	±(0.04% + 30 µA)	10 µA	
Resistance	400 Ω	0~400,00 Ω	±(0.05% + 0.1 Ω)	0.01 Ω	Accuracy during 3-wire measurement
AC voltage	1 V	0~1,100 V		1 mV	Input resistance: Approximately 10 MΩ/10 pF
	10 V	0~11,000 V	±(0.5% + 5 dgt)	0.01 V	Input frequency: 45~65 Hz
	100 V	0~110,00 V		0.1 V	Input voltage range: 10%~100%
	300 V	0~300 V	±(0.5% + 2 dgt)	1 V	Measurement method: Average value rectification
Frequency, pulse	100 Hz	1.00~100.00 Hz		0.01 Hz	Maximum input: 30 V peak
	1000 Hz	1.0~1000.0 Hz	±2 dgt	0.1 Hz	Input resistance: 200 kΩ or greater
	10 kHz	0.001~11,000 kHz		0.001 kHz	Sensitivity: 0.5 V peak or greater
	CPM	0~99,999 CPM		1 CPM	Contact input: Maximum 100 Hz
	CPH	0~99,999 CPH		1 CPH	Notes CPM: Counts per minute CPH: Counts per hour

Temperature coefficient: Accuracy shown above × (1/5)/°C

●Measurement unit (temperature; CA71 only) range and accuracy

Parameter	Reference	Range	Accuracy (23±5 °C per year)	Resolution	Remarks
TC *7	K	-200.0~1372.0°C			
	E	-200.0~1000.0°C			
	J	-200.0~1200.0°C	±(0.05% + 1.5°C) (-100°C or greater)	0.1°C	
	T	-200.0~400.0°C			
	N	-200.0~1300.0°C	±(0.05% + 2°C) (-100°C or less)		
	L	-200.0~900.0°C			
	U	-200.0~400.0°C			
	R	0~1768°C	±(0.05% + 2°C) (100°C or greater)	1°C	
	S	0~1768°C	±(0.05% + 3°C) (100°C or less)		
	B	600~1800°C			
RTD	Pt100 *8	-200.0~850.0°C	±(0.05% + 0.6°C)	0.1°C	Accuracy during 3-wire measurement
	JPt100	-200.0~500.0°C			

Temperature coefficient: Accuracy shown above × (1/5)/°C

*6: As per JIS C 1604-1997 (ITS-90). IPTS-68 may be selected through internal settings (DIP switch).

*7: As per JIS C 1602-1995 (ITS-90) (L and U are DIN specs).

K, E, J, T, N, R, S, and B may be switched to IPTS-68 through internal settings (DIP switch) (L and U are not switched).

Parameter	Specification
Withstand voltage	Across input terminal and output terminal, 3.7 kVAC, for one minute
Operating temperature and humidity ranges	0~50°C, 20~80% RH (no condensation)
Storage temperature and humidity ranges	-20~50°C, 90% RH or less (no condensation)
External dimensions (WHD)	Approximately 190 × 120 × 55 mm
Weight	Approximately 730 g (including batteries)
Standard accessories	All of the following are included: Signal generating lead cables (one red, two black): 98020 Measurement lead cables (one red, one black): RD031 Carrying case: 93016 Terminal adapter for CA71: 99021 User's manual: IM CA71-E Fuse: A1635EF (for current terminal input protection) Four AA alkaline batteries: A1070EB × 4
Optional accessories (sold separately)	AC adapter: 94013 (120 V AC power supply) RJ sensor: B9108WA (For reference junction compensation) Accessory carrying case: B9108XA Communication cable: 91017
Spare parts	Signal generating lead cables (one red, two black): 98020 Measurement lead cables (one red, one black): RD031 Carrying case: 93016 Terminal adapter: 99021

⚠NOTICE

- Before using the product, read the instruction manual carefully to ensure proper and safe operation.

YOKOGAWA

YOKOGAWA TEST & MEASUREMENT CORPORATION

Global Sales Dept. /Phone: +81-422-52-6237 E-mail: tm@cs.jp.yokogawa.com
Facsimile: +81-422-52-6462

YOKOGAWA CORPORATION OF AMERICA
YOKOGAWA EUROPE B.V.
YOKOGAWA SHANGHAI TRADING CO., LTD.
YOKOGAWA ELECTRIC KOREA CO., LTD.
YOKOGAWA ENGINEERING ASIA PTE. LTD.
YOKOGAWA INDIA LTD.
YOKOGAWA ELECTRIC CIS LTD.
YOKOGAWA AMERICA DO SUL LTDA.

Phone: +31-88-4641000
Phone: +86-21-6239-6363
Phone: +82-2-2628-3810
Phone: +65-6241-9933
Phone: +91-80-4158-6396
Phone: +7-495-737-78-68
Phone: +55-11-5681-2400

E-mail: tmi@us.yokogawa.com
E-mail: tmi@nl.yokogawa.com
E-mail: tech@ysh.com.cn
E-mail: TMI@kr.yokogawa.com
E-mail: TMI@sg.yokogawa.com
E-mail: tmi@in.yokogawa.com
E-mail: info@ru.yokogawa.com

Facsimile: +86-21-6880-4987
Facsimile: +82-2-2628-3899
Facsimile: +65-6241-9919
Facsimile: +91-80-2852-1442
Facsimile: +7-495-737-78-69

<http://tmi.yokogawa.com/>

YMI-KS-MI-SE05

Subject to Change without notice.
Copyright © 2002, Yokogawa Test & Measurement Corporation
[Ed: 06/b]
Printed in Japan, 711(KP)