




Zero Speed Switch Sensor, ZS09P



Model ZS09P, with Power Relay
Device contains sensor and relay.

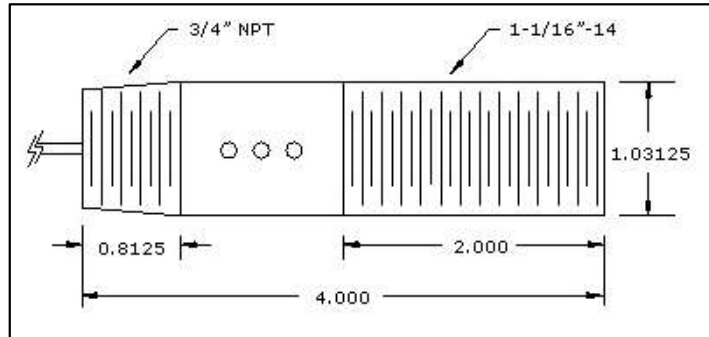

Dimensions (in inches) and Threads

General Specifications

<p>Operating Voltages: 6-24 VDC or 120 VAC</p> <p>Operating Temperature: -40°F to 140°F</p> <p>Operating Frequency: Hall Effect and Inductive (Gartooth): 0.02Hz-10kHz Hall Effect Only: 0.02Hz - 25kHz</p> <p>Contact ratings: 5A, 240VAC 5A, 30VDC Vibration resistance (function) NO/NC contact >15/5g Shock resistance (destruction) >100g</p> <p>Relay Set-Point Adjustment Range: Standard: 1-100 RPM, 1 Pulse Per Revolution Custom parameters are available.</p>	<p>Housing Material: Aluminum</p> <p>Fuse: Internal 1/2 Amp non-replaceable fuse</p> <p>Cable: 4 ft., 6 conductor, 22 AWG, unshielded</p> <p>Sensing Distance to Target (Gap): 1/16" to 5/16" using Ferrous Target (Gartooth Wheel, Bolt Head, Key Stock, etc.) 1/2" to 5/8" using Phares Magnetic Disk 1" using Phares Magnet, Part No. SM-100</p> <p>Minimum Gartooth Target Sizes: 1/8" Gartooth length, width, depth and gap.</p> <p>Gartooth Target Material: High ferrous (iron) content.</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Part Number Chart

ZS09P X - Y Z

<u>X – Relay Output</u>	<u>Y – Input Voltage</u>	<u>Z – Target Material</u>
1: N.O./N.C. 2: N.O. 3: N.C.	120: 120 VAC D: 6-24 VDC	M: Magnetic F: Ferrous (such as Gartooth, bolt head, or keystick)

Options

- Custom Cable Length
- Custom Relay Set-Point Adjustment Range
- Delrin sensor housing for corrosive environments
- Fixed Set-Point
- Relay Latch