



MICRO SWITCH™ Heavy-Duty Limit Switches HDLS Series



MICRO SWITCH™ HDLS Series

Heavy-Duty Limit Switches

Honeywell Sensing and Control's MICRO SWITCH™ heavy-duty limit switches' modular construction allows for a wide variety of actuator styles, operating heads, and electrical circuitry options. The plug-in versions greatly reduce downtime on production lines with high actuation rates as replacement of the switch is accomplished in seconds. The base receptacle contains all the wiring and conduit connection while the switching component with operating head easily assembles to the base and is attached with two screws.

What makes our switches better?

- Industry-leading breadth-of-product offering: HDLS standard, HDLS harsh-duty epoxy sealed, or the HDLS stainless steel
- NEMA 1, 3, 4, 4X, 6, 6P, 12, 13 and IP65/66/67 environmental sealing for demanding applications
- UL, CSA, CE, and CCC approvals for global use
- Sintered bronze bearing on 303 stainless steel operating shaft for enhanced mechanical life (50 million actuation cycles) and operational reliability
- All-metal drive train for consistent operating characteristics, even at high temperature. Lasts longer (without need for frequent adjustment) than drive trains with plastic parts
- Exclusive teller tab ensures proper torque. When it cannot be moved, the lever is tight enough to prevent slippage



RELIABILITY • DURABILITY
MODULAR • GLOBAL

Features and Benefits

SEALED TO NEMA 1, 3, 4, 4X, 6, 6P, 12, 13; IP 65/66/67

MICRO SWITCH™ HDLS limit switch **NEMA/IP sealing** features twin shaft seals for an extra measure of protection. They are ideal for many applications with **demanding indoor and/or outdoor environments**, where they may be subjected to shock or vibration from equipment, temperature extremes, dust, splashing water, coolant, and/or hose-directed water.

Works the first time – every time

WITHSTANDS MANY TOUGH ENVIRONMENTS

Rugged, **corrosion-resistant zinc head and body** are phosphate treated and epoxy coated for indoor and outdoor applications. **Diaphragm seal** between head and body provides an extra measure of protection. Functions with exposure to severe temperatures, dust, dirt, grime, and caustic chemicals.

Rapid customization and design-in time

USED GLOBALLY

Multiple connectivity options for international applications, as well as global approvals. Large, existing installation base and channel allows for quick delivery worldwide. **UL, CSA, CE, and CCC** approvals.

OPTIONAL SEALS

Fluorosilicone seals available for low temperature applications, and **fluorocarbon seals** available for chemically harsh environments and higher temperature applications.

UNIQUE DESIGN FEATURES

Keyed head design for **secure head-to-body retention** with the head in any one of four positions 90° apart. Self-lifting pressure plate terminals **saves wiring time**.

DESIGN FLEXIBILITY

Wide variety of actuators, switch options, and head styles for design flexibility. Rotary actuated heads are **field adjustable** for CW actuation, CCW actuation, or both to reduce inventory.

EASILY CONTROLS LOW-VOLTAGE DC APPLICATIONS

Limit switches available with a choice of **silver or gold-plated contacts** to handle a variety of electrical load requirements.

INTERCHANGEABLE

Plug-in and non plug-in bodies have identical operating characteristics and are **dimensionally interchangeable to reduce complexity**. Actuating levers for single and double pole, plug-in and non plug-in bodies provide same tracking and minimize inventory.

Potential Applications



MACHINE TOOLS

Determines part presence, machine slide position/stops, gates and doors

AUTOMOTIVE MACHINE TOOLS

Provides presence sensing on transfer machines, horizontal and vertical boring machines, stamping and forming equipment and automotive assembly line equipment

MATERIAL HANDLING

Used to position automated vehicle wash systems, overhead doors, garbage truck bodies, cranes, intermodal container handlers, gantry cranes, commercial aircraft boarding bridge



OUTDOOR ELECTROMECHANICAL STRUCTURES

End of travel indicator for equipment with moving components in harsh environments and remote locations, such as satellite and weather station arrays and solar energy harvesters

BALERS/COMPACTORS

Used as door interlocks for indoor and outdoor applications

CONVEYORS

Used for alignment/tracking, tensioning, and product/material presence

FOOD AND BEVERAGE

Used for process control, and packaging

POWER PLANTS

Used on conveyors, doors and gates

OFF-ROAD EQUIPMENT

Senses position of large components on wheeled or track equipment, motorized railroad switch, and rail locomotives

AGRICULTURAL EQUIPMENT

Grain handling and livestock equipment

VALVES

Indicates closed and/or open position


TRANSPORTATION HUBS

Commercial aircraft boarding bridge, commercial aircraft ground support equipment, intermodal container handlers, gantry cranes, shipboard conveyors, door/hatch position & valve position, railroad locomotives and rail maintenance equipment



MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 1. MICRO SWITCH™ HDLS SERIES FEATURES AND OPTIONS

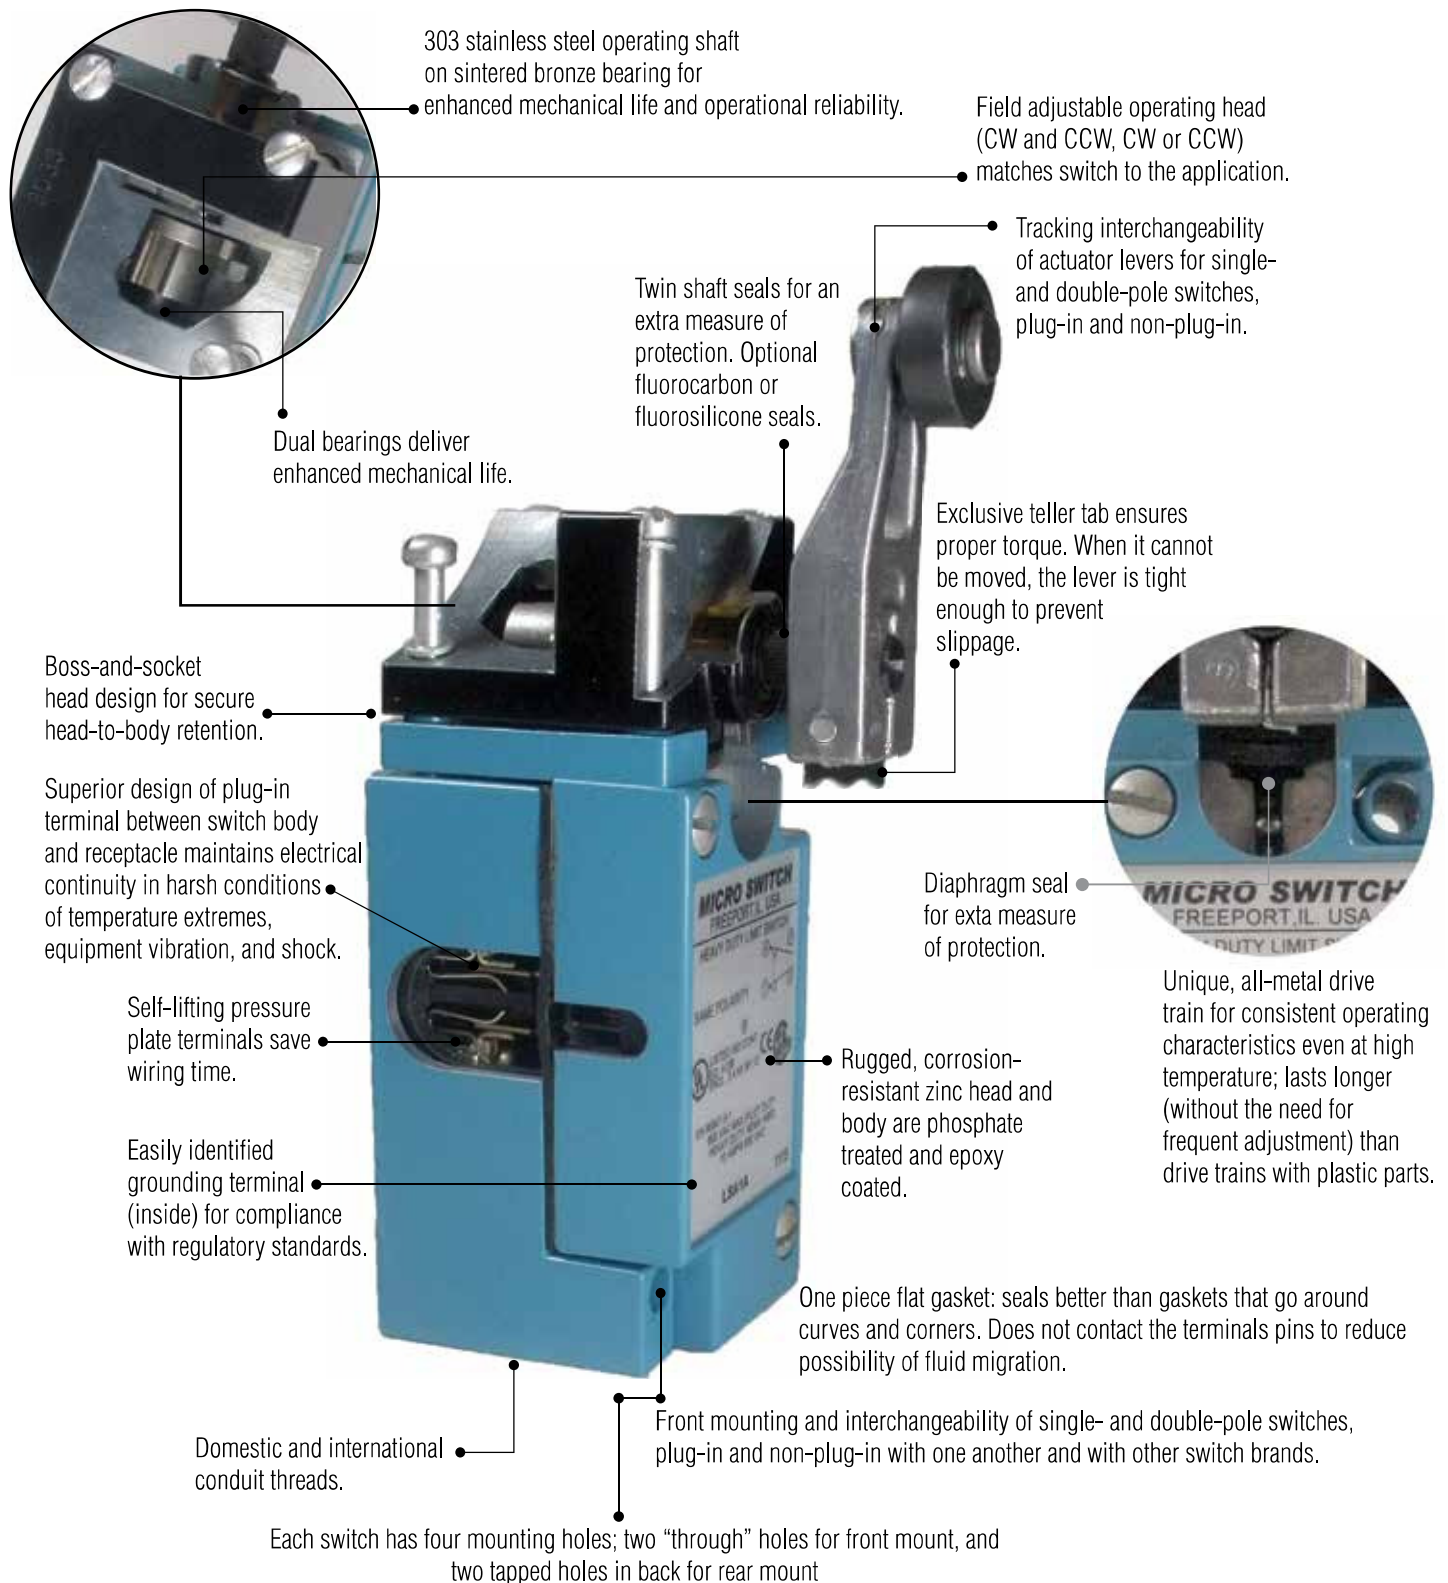

HDLS Series

Table 1. Specifications

Characteristic	Parameter		
Product type	MICRO SWITCH™ heavy-duty limit switches		
Actuators	Side plunger - adjustable	Side plunger - pin	Side plunger maintained - pin
	Side roller plunger	Side rotary	Side rotary maintained
	Top plunger - adjustable	Top plunger - pin	Top roller plunger
	Top rotary	Wobble - cable	Wobble - cat whisker
	Wobble - coil spring	Wobble - plastic rod	Wobble - spring wire
Circuitry	1NC 1NO SPDT snap action, double break		
	2NC 2NO DPDT center neutral, snap action, double break		
	2NC 2NO DPDT snap action, double break		
	2NC 2NO DPDT sequential, snap action, double break		
Electrical	10 A thermal		
	Single and double pole: AC15 A600; DC13 R300 (see table on page 8)		
Housing material	Zinc die-cast with an electrostatic epoxy coating		
Termination types	0.5 in - 14NPT conduit	0.75 in - 14NPT conduit	12 ft cable
	PG 13,5 conduit	20 mm conduit	4-pin micro-style connector
	4-pin mini-style connector	5-pin mini-style connector	9-pin mini-style connector
	6 ft cable	Manifold mounting	
Housing type	HDLS Plug-in, HDLS Non-Plug-in		
Sealing	IP65/66/67; NEMA 1, 3, 4, 4X, 6, 6P, 12, 13		
Operating temperature	-12 °C to 121 °C [10 °F to 250 °F];		
	optional: -40 °C to 121 °C [-40 °F to 250 °F]		
Agency approvals and standards	UL, CE, CSA, CCC		
UNSPSC code	302119		
UNSPSC commodity	302119 Switches and controls and relays		
Sealed	Industrial		

MICRO SWITCH™ Heavy-Duty Limit Switches

MICRO SWITCH™ HDLS SERIES NOMENCLATURE

LS	A	1A	1	-				
Switch Type	Heads		Body/Basic Switch Codes			Modification Codes		Wobble Actuator
HDLS Series Heavy-Duty Limit Switch	A Side rotary, momentary	L Side rotary, sequential				A 4-pin mini-style	PA 5-conductor STOOW-A cable, 8 ft	7A Wobble, plastic
	B Top rotary, momentary	M Side rotary, center neutral	1A Standard switch	2B Standard switch	4L Standard switch	B 5-pin mini-style	XA 9-conductor STOOW-A cable, 8 ft	7M Wobble, wire
	C Top plunger, plain	N Side rotary, maintained	1E Gold contacts	2C Sequential	4M Sequential	C 5-conductor STOW-A cable, 6 ft	PB 5-conductor STOOW-A cable, 30 ft	7N Wobble, cable
	D Top roller plunger	P Side rotary, momentary, low pretravel	1G Gold contacts, manifold mount	2D Center neutral	4N Center neutral	E 4-conductor SJTOW-A cable, 6 ft	1 Clockwise head rotation	8A Cat whisker, 5.5 in steel
	E Side plunger plain, momentary	R Side rotary, momentary, low torque	1H Low force	2R 120 V neon indicator	4S Standard switch golf contacts	J 8-pin mini-style	2 Counterclockwise head rotation	8B Cat whisker, 7.5 in steel
	F Side plunger roller, momentary	S Side rotary, gravity return extr, low torque	5A 120 V neon indicator	2S Standard switch golf contacts	4T Sequential, gold contacts	M 9-conductor STOOW-A cable, 6 ft	3 Head assembled with actuator to right side	8C Coil spring, 5.5 in
	G Side plunger plain, maintained	T Side rotary, momentary, extr, low torque	8A 240 V neon indicator	2T Sequential, gold contacts	4U Center neutral, gold contacts	P 5-conductor STOOW-A cable, 12 ft	4 Head assembled with actuator to left side	8D Cat whisker, plastic
	H Side rotary, momentary, low pretravel & torque	U Side rotary, momentary, 5° max, pretravel	9A 24 V LED indicator	2U Center neutral, gold contacts	7L Standard switch, 1/2 in conduit	R 9-pin mini-style	5 Head assembled with actuator to mounting surface	
	J Wobble stick	V Top plunger, adjustable	Non-plug-in Single Pole	6B Standard switch, 1/2 in conduit	7M Sequential, 1/2 in conduit	S 5-pin micro-style	6 Roller perpendicular to mounting surface	
	K Cat whisker	W Side plunger, momentary, adjustable	3K Standard switch	6C Sequential, 1/2 in conduit	7N Center neutral, 1/2 in conduit	X 9-conductor STOOW-A cable, 12 ft	7 Indicator light wired to normally closed circuit	
			6D Center neutral, 1/2 in conduit	7S Stnd. switch, gold contacts, 1/2 in conduit	BB 3-foot mini-style pigtail, single pole	8 Roller on side plunger in vertical position		
			6R 120 V neon indicator, 1/2 in conduit	7T Sequential, gold contacts, 1/2 in conduit	DD 4-pin micro-style with jumper			
			6S Stnd. switch, gold contacts, 1/2 in conduit	7U Center neutral, gold contacts, 1/2 in conduit				
			6T Sequential, gold contacts, 1/2 in conduit					
			6U Center neutral, gold contacts, 1/2 in conduit					

* 3 or 4 after the "LS" indicates special metric conduit threads:
3 = PG 13.5
4 = 20 mm

NOTE: Not all combinations of model codes are available. Please contact your local Honeywell provider for assistance.

NOTE: Not all combinations of model codes are available. Please contact your local Honeywell provider for assistance.

HDLS Series

ASSEMBLY MODIFICATIONS • ROTARY

Momentary action rotary switches can be furnished in other than the normal assembled conditions. To specify modifications, add the numbers shown below to the catalog listings. Modification number suffixes are:

- 1** Clockwise actuation only
- 2** Counterclockwise actuation only
- 3** Shaft to right of switch front
- 4** Shaft to left of switch front
- 5** Shaft to back of switch
- 7** Indicator light wired to NC circuit

For example,

Catalog listing LSA1A**23** is an LSA1A switch adjusted for counterclockwise actuation only. The operating shaft is to the right side of the switch when viewing it from the front (label side). No lever.

Catalog listing LSA8A**7** is an LSA8A switch with the 240 volt indicator light wired to the NC circuit. No lever.

PLUNGER ASSEMBLY MODIFICATIONS

Add the following modification numbers to the catalog listing in the plunger switch:

- 3** Side plunger to right of switch front
- 4** Side plunger to left of switch front
- 5** Side plunger to back of switch
- 6** Roller on top plungers perpendicular to mounting surface
- 7** Light on indicator versions wired to NC circuit
- 8** Roller on side plungers in vertical position

For example,

Catalog listing LSF1A**3** is an LSF1A switch with the side roller plunger to the right side.

PLUG-IN VS. NON-PLUG-IN MODELS

Honeywell HDLS limit switches are offered in two styles: non-plug-in design and plug-in design. With plug-in construction, the wiring and conduit connection is made to the base receptacle. This feature reduces downtime as the plug-in unit can be removed and replaced without disconnecting the wiring or conduit connections to the switch.

MICRO SWITCH™ HDLS SERIES ELECTRICAL RATINGS:

10 A CONTINUOUS CARRY

AC VOLTS; PILOT DUTY: AC15, A600/B600

Electrical Rating	Circuitry	Vac	Amps at 0.35 Power Factor Make	Amps at 0.35 Power Factor Break
A* AC15, A600	SPDT DPDT	120	60	6
		240	30	3
		480	15	1.5
		600	12	1.2
B AC15, B600	Δ	120	30	3
		240	15	1.5
		480	7.5	0.75
		600	6	0.60

Δ Gravity return (Model LSS..) and extra-low torque (Model LST..)

MICRO SWITCH™ HDLS SERIES ELECTRICAL RATINGS:

DC VOLTS; PILOT DUTY: DC13, R300

Electrical Rating	Circuitry	Vdc	Make & Break Amps Inductive	Make & Break Amps Resistive
A, B*	SPDT DPDT	120	0.25	0.8
		240	0.15	0.4

* For switches with an indicator light, use only at voltage stated for indicator light.

MICRO SWITCH™ HDLS limit switches are capable of the following low voltage dc loads

Circuitry	Vdc	Amps Inductive	Amps Resistive
SPDT	24	10	10
DPDT	24	10	10



MICRO SWITCH™ Heavy-Duty Limit Switches

MICRO SWITCH™ HDLS SERIES OPERATING HEADS

SIDE ROTARY: Available levers provide greater versatility. Heads may be positioned with shaft on any side. All are momentary action except maintained head (LSN Series).



LSA - Standard: 60° minimum overtravel, 15° maximum pretravel, 5° (single pole) and 7° (double pole) maximum differential travel. Operating temperature range from -12 °C to 121 °C [10 °F to 250 °F].*

LSR - Low operating torque: 60° minimum overtravel, 15° maximum pretravel, 0.19 Nm [1.7 in lb] maximum operating torque. Operating temperature range from -1 °C to 121 °C [250 °F to 250 °F].*

LSN - Maintained contact: Maintained on counterclockwise rotation and reset on clockwise rotation, and vice versa. Operating temperature range from -1 °C to 121 °C [30 °F to 250 °F].

LSP - Low differential: 68° minimum overtravel, 7° maximum pretravel, 3° (single pole) and 4° (double pole) maximum differential travel. Operating temperature range from -12 °C to 121 °C [10 °F to 250 °F].*

LSH - Low torque, low differential travel: 68° minimum overtravel. Features low operating torque and narrow differential travel. Operating temperature range from -1 °C to 121 °C [30 °F to 250 °F].*

LSU - Low pretravel: 5° max. pretravel, 70° min. overtravel, and a second step of 18° max. Operating temperature range from -12 °C to 121 °C [10 °F to 250 °F].*

LSL - Sequence action: 48° minimum overtravel. Delayed action between operation of two poles. Operating temperature range from -12 °C to 121 °C [10 °F to 250 °F].*

LSM - Center neutral: 53° minimum overtravel. One set of contacts operates on the clockwise rotation, and another set on the counterclockwise rotation. Operating temperature range from -1 °C to 121 °C [30 °F to 250 °F].*

LST - Momentary action with extra low torque: 12 in oz of operating and full travel torque with momentary action. Operating temperature range from -12 °C to 121 °C [10 °F to 250 °F].*

LSS - Gravity return: Has no return spring mechanism so weight of the lever must provide the return force. Extremely light operating torque (5 in oz max.) is useful in conveyor applications and can be operated by small or lightweight objects. Operating temperature range from -1 °C to 121 °C [30 °F to 250 °F].*

TOP ROTARY: Available levers provide greater versatility. Heads may be positioned with shaft on any side. All are momentary action except maintained head.



LSB: With 100° minimum overtravel. Various levers that fit side rotary shafts may be used on the top rotary shaft. Switch is ideal when increased overtravel is required. Momentary action. Standard operating temperature range from -1 °C to 121 °C [30 °F to 250 °F].*

TOP PLUNGERS: Available with 4,83 mm [0.19 in] minimum overtravel. Top pin plungers are offered in pin plunger, an adjustable plunger, and a roller plunger. Standard temperature range of -12 °C to 93 °C [10 °F to 200 °F].



LSC - Top pin plunger: A corrosion-resistant steel plunger for in-line actuating motion. Oil-tight seals on plunger and between the operating head and housing keep out coolant, dust, and chips. Momentary action.



LSD - Top roller plunger: A corrosion-resistant steel roller and plunger that is adjustable to 90° angles to accept cam or slide operation from any of two directions. Boot seal on the plunger. Momentary action.



LSV - Adjustable top pin plunger: Provides easy application and saves on installation time. The operating points of the switch can be adjusted from 52,8 mm to 59,3 mm [2.085 in to 2.335 in]. Seals are the same as the pin plunger. Momentary action.

*(Fluorocarbon seals are preferred for temperatures above 93 °C [200 °F]).

HDLS Series

MICRO SWITCH™ HDLS SERIES OPERATING HEADS

SIDE PLUNGERS: Available with 4,83 mm [0.19 in] minimum overtravel. Side plungers are offered in plain plunger, an adjustable plain plunger, a roller plunger, and a maintained plunger. Standard temperature range of -12 °C to 93 °C [10 °F to 200 °F].

	LSE - Side pin plunger: For actuating motion inline with the plunger travel. Actuating head may be faced in any of four positions, 90° apart. A boot seal on the plunger and a gasket seal between the head and housing keep out coolant, dust, and chips. Momentary action.		LSW - Adjustable side pin plunger: Has the same features of the side plain plunger plus the means to adjust the operating points of the switch from 41 mm to 47,4 mm [1.615 in to 1.865 in]. Momentary action.
	LSF - Side roller plunger: Fits close quarters under cams and slides. The head may be faced in any of four positions, 90° apart. <u>The roller can be turned vertical or horizontal to the switch.</u> Boot seal on plunger. Momentary action.		LSG - Maintained contact side pin plunger: Offers a maintained contact on actuation of the switch. A reverse motion of the plunger resets the switch. Sealing is the same as other side plunger actuation heads. Operating temperature range is -1 °C to 93 °C [30 °F to 200 °F].

WOBBLE LEVER ACTUATING HEADS: Heads come with either a spring wire, Delrin® plastic rod, or steel cat whisker. Any movement of the lever (except pull) will actuate the switch. Standard temperature range of -12 °C to 93 °C [10 °F to 200 °F].

				
LSJ1A-7M - Spring wire: 300 Series SST wire may be formed for special applications.	LSJ1A-7N - Flexible actuator: Designed with a tin-plated cable.	LSK1A-8C - Coil spring: Designed with a 300 Series SST coil spring.	LSJ1A-7A - Plastic rod: Recommended where possible scratching or marring by the actuator is to be avoided.	LSK1A-8A - Cat whisker: 300 Series SST actuator designed for low operating force applications.

*(Fluorocarbon seals are preferred for temperatures above 93 °C [200 °F]).

MICRO SWITCH™ Heavy-Duty Limit Switches

SPECIAL OPTIONS

HIGH TEMPERATURE/CHEMICAL RESISTANT SWITCHES

Completely fluorocarbon (FC)-sealed switches have a full FC body gasket coving the switch cavity. Rotary types have an extra FC seal on the operating shaft, while plunger versions have FC boot seals. They are for use in many applications where the environment includes fire-resistant synthetic fluids. In addition to most all fluids, the FC-sealed switches may be used with such industrial fluids such as Cellulube, Fyrquell, Houghto-Safe, Pydraul, and other special cutting and hydraulic fluids. The additional FC seals also promote longer operating life for rotary-actuated HDLS switches in applications where the temperatures are normally -12 °C to 121 °C [10 °F to 250 °F]. If pre-wired with cable, then temperature limits are 105 °C [221 °F] dry and 60 °C [140 °F] wet.

To order, insert the additional letters **Y** and **C** in the appropriate places in the standard catalog listing, as shown below:

LSA1A	standard, side-rotary plug-in switch
LSYA^C1A	completely FC-sealed version of LSA1A

LOW TEMPERATURE SWITCHES

All forms of HDLS limit switches are also available in low-temperature construction. Design features include fluorosilicone diaphragm, shaft seals, and external booth seal (where applicable). If pre-wired with a cable, low temperature limits are -10 °C [14 °F] flex and -30 °C [-22 °F] non-flex.

To order, insert the additional letters **Y** and **B** in the appropriate places in the standard catalog listing, as shown below:

LSA1A	standard, side-rotary plug-in switch
LSYAB1A	low-temperature version of LSA1A

CONDUIT OPENINGS

For conduit openings other than 1/2-NPT and 3/4-NPT, substitute the following after LS in the catalog listing:

LS3 PG13,5

LS4 20 mm

LSA1A	side rotary with 1/2-14 NPT conduit
LS4A1A	side rotary with 20 mm conduit

TEMPERATURE LIMITS

	Standard HDLS				Low Temperature HDLS (Fluorosilicone Sealed): Y_B				High Temperature HDLS (Fluorocarbon Sealed)*: Y_C		
	Low Limit		High Limit		Low Limit		High Limit		Low Limit		High Limit
	-12 °C [10 °F]	-1 °C [30 °F]	93 °C [200 °F]	121 °C [250 °F]	-40 °C [-40 °F]	-29 °C [-20 °F]	93 °C [200 °F]	121 °C [250 °F]	-12 °C [10 °F]	-1 °C [30 °F]	121 °C [250 °F]
LSA - Side Rotary Momentary	X			X	X			X	X		X
LSB - Top Rotary		X		X		X		X		X	X
LSC - Top Plain Plunger	X		X		X		X		X		X
LSD - Top Roller Plunger	X		X		X		X		X		X
LSE - Side Plain Plunger	X		X		X		X		X		X
LSF - Side Roller Plunger	X		X		X		X		X		X
LSG - Side Plunger, Maintained		X	X			X	X			X	X
LSH - Side Rotary, Low PT, Low Torque		X		X		X		X		X	X
LSJ - Wobble Stick	X		X		X			X	X		X
LSK - Cat Whisker	X		X			X		X	X		X
LSL - Side Rotary, Sequence	X			X	X			X	X		X
LSM - Side Rotary, Center Neutral		X		X	X			X		X	X
LSN - Side Rotary, Maintained		X		X		X		X		X	X
LSP - Side Rotary, Low Pretravel	X			X	X			X	X		X
LSR - Side Rotary, Low Torque		X		X		X		X		X	X
LSU - 5° Low Pretravel	X			X	X			X	X		X
LSV - Top Adjustable Plunger	X		X		X		X		X		X
LSW - Side Adjustable Plunger	X		X		X		X		X		X

* For HDLS application wherein the upper temperature limit is normally above 93 °C [200 °F], much longer switch life can be obtained by using completely fluorocarbon-sealed switches rather than standard HDLS.

FACTORY SEALED PRE-WIRED LIMIT SWITCHES

Features

- Pre-wired with 6 ft STOW-A cable or other 4, 5, or 9-pin connectors (other lengths available)
- Wire entry area completely factory sealed
- (Cable version) NEMA 1, 6, 6P, 12; IP67
- (Connector version) NEMA 1, 6, 6P, 12, 13; IP67

How to order:

To order factory sealed switches, add the modification codes shown below to the standard HDLS listings:

Circuitry	Cable	1/2 in connector style
SPDT	C	A (4-pin mini-style) B (5-pin mini-style) DD (4-pin micro-style)
DPDT	M	R (9-pin mini-style)

Examples:

LSA1A**C** = LSA1A with 6 feet of 5-conductor STOW-A cable


LSJ2B**M**-7N = LSJ2B-7N with 6 feet of 9-conductor STOW-A cable

LSA1A**B** = LSA1A with a 5-pin mini-style connector


LSA1A**DD** = LSA1A with a 4-pin micro-style connector

NOTE: Connector versions available with 1/2 in conduit only.

WIRING DIAGRAM (STYLE A)

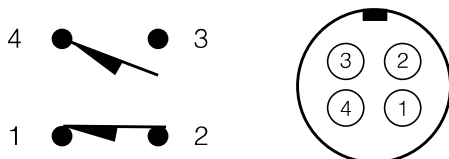

WIRING DIAGRAM (STYLE DD)

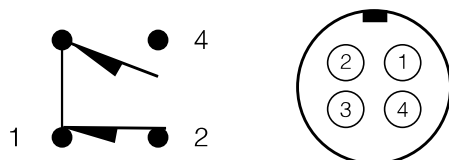


Pin 3 not connected

WIRING DIAGRAMS (STYLES B&G)

Connectors = Numbers (mini-style)

Cables = Colors



Single-Pole Circuitry




3 = Ground

Electrical Ratings: Connector Versions

Mini	600 VAC, 7A
Micro	300 VAC, 3A

WIRING DIAGRAMS (STYLES M&R)

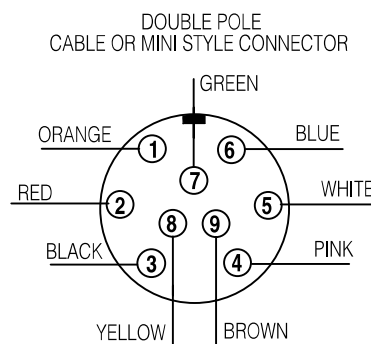

Double-Pole Circuitry



7 = Ground

MICRO SWITCH™ Heavy-Duty Limit Switches

SIDE ROTARY • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS



	Standard (LSA)		Low Differential (LSP)		5° Pretravel (LSU)	
Description	Standard		Low pretravel & low differential travel		Low pretravel	
	SPDT	DPDT	SPDT	DPDT	SPDT	DPDT
	<div><p>Snap Action 1NO/1NC</p><p>0° 15° 75° 10°</p></div>	<div><p>Snap Action 2NO/2NC</p><p>0° 15° 75° 8°</p></div>	<div><p>Snap Action 1NO/1NC</p><p>0° 9° 75° 6°</p></div>	<div><p>Snap Action 2NO/2NC</p><p>0° 9° 75° 5°</p></div>	<div><p>Snap Action 1NO/1NC</p><p>0° 5° 75° 2°</p></div>	<div><p>Snap Action 2NO/2NC</p><p>0° 5° 75° 1°</p></div>
Contact closed ■ Contact open □						
Pretravel	15° max.	15° max.	9° max.	9° max.	5° max.	5° max.
Different. travel	5° max.	7° max.	3° max.	4° max.	3° max.	4° max.
Overtravel	60° min.	60° min.	66° min.	66° min.	70° min.	70° min.
Oper. torque	0,45 Nm [4 in-lb] max.		0,45 Nm [4 in-lb] max.		0,45 Nm [4 in-lb] max.	
Action	CW & CCW (Momentary)					
Op. temp range ³	-12 °C to 121 °C [10 °F to 250 °F] (for low temp, high temp, or preleaded versions, see pages 11-12)					

Circuitry	Contacts	Body Style ²	Conduit (NPT)	Options			
SPDT 	Silver	Plug-in	0.5 in		LSA1A	LSP1A	LSU1A
	Gold ⁴	Plug-in	0.5 in		LSA1E	LSP1E	LSU1E
	Silver	Plug-in	0.5 in	120 V Ind. lite ¹	LSA5A	LSP5A	LSU5A
	Silver	Plug-in	0.5 in	240 V Ind. lite ¹	LSA8A	LSP8A	LSU8A
	Silver	Plug-in	0.5 in	24 V LED 1.5 mA max. auto polarity ¹	LSA9A	LSP9A	LSU9A
	Silver	Non-plug-in	0.5 in		LSA3K	LSP3K	LSU3K
DPDT 	Silver	Plug-in	0.75 in		LSA2B	LSP2B	LSU2B
	Gold ⁴	Plug-in	0.75 in		LSA2S	-	-
	Silver	Plug-in	0.5 in		LSA6B	LSP6B	LSU6B
	Gold ⁴	Plug-in	0.5 in		LSA6S	-	-
	Silver	Plug-in	0.75 in	120 V Ind. lite ¹	LSA2R	LSP2R	LSU2R
	Silver	Non-plug-in	0.75 in		LSA4L	LSP4L	LSU4L
	Silver	Non-plug-in	0.5 in		LSA7L	LSP7L	LSU7L

¹ Use at voltage indicated for light. Wired to NO circuit. Upper temperature limit for lighted units is 93 °C [200 °F]

² Plug-in listings include base receptacle

³ Completely fluorocarbon sealed switches are preferred for use in temperatures above 93 °C [200 °F]

⁴ Gold-plated contacts

NOTE: Same polarity each pole.

To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAC1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAB1A limit switch.

SIDE ROTARY • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS



	Low Torque (LSR)		Low Diff., Low Torque (LSH)	
Description	Low operating torque		Low pretravel and low torque	
	SPDT	DPDT	SPDT	DPDT
	<p>Snap Action 1NO/1NC</p> <p>0° 15° 75°</p>	<p>Snap Action 2NO/2NC</p> <p>0° 15° 75°</p>	<p>Snap Action 1NO/1NC</p> <p>0° 9° 75°</p>	<p>Snap Action 2NO/2NC</p> <p>0° 9° 75°</p>
	<p>Contact closed ■ Contact open □</p>			
	Pretravel	15° max.	15° max.	9° max.
Different. travel	5° max.	7° max.	3° max.	4° max.
Overtravel	60° min.	60° min.	66° min.	66° min.
Oper. torque	0,19 Nm [1.7 in-lb] max.		0,19 Nm [1.7 in-lb] max.	
Action	CW & CCW (Momentary)			
Op. temp range ³	-1 °C to 121 °C [30 °F to 250°F] (for low temp, high temp, or preloaded versions, see pages 11-12)			

Circuitry	Contacts	Body Style ²	Conduit (NPT)	Options		
SPDT 	Silver	Plug-in	0.5 in		LSR1A	LSH1A
	Gold ⁴	Plug-in	0.5 in		LSR1E	LSH1E
	Silver	Plug-in	0.5 in	120 V Ind. lite ¹	LSR5A	LSH5A
	Silver	Plug-in	0.5 in	240 V Ind. lite ¹	LSR8A	LSH8A
	Silver	Plug-in	0.5 in	24 V LED 1.5 mA max. auto polarity ¹	LSR9A	LSH9S
	Silver	Non-plug-in	0.5 in		LSR3K	LSH3K
DPDT 	Silver	Plug-in	0.75 in		LSR3B	LSH2B
	Silver	Plug-in	0.5 in		LSR6B	LSH6B
	Silver	Plug-in	0.75 in	120 V Ind. lite ¹	LSR2R	LSH2R
	Silver	Non-plug-in	0.75 in		LSR4L	LSH4L
	Silver	Non-plug-in	0.5 in		LSR7L	LSH7L

¹ Use at voltage indicated for light. Wired to NO circuit. Upper temperature limit for lighted units is 93°C [200 °F]

² Plug-in listings include base receptacle

³ Completely fluorocarbon sealed switches are preferred for use in temperatures above 93 °C [200 °F]

⁴ Gold-plated contacts

NOTE: Same polarity each pole.

To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAC1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAB1A limit switch.

MICRO SWITCH™ Heavy-Duty Limit Switches

SIDE ROTARY • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS



	Maint. Contact (LSQ)	Maint. Contact (LSN)	Center Neutral (LSM)	Sequence Action (LSL)
Description	Maint. 360° Alt. Action	Maintained, 2-pos ^{1,2} . Std.	Center Neutral (Pole 1 operates CCW; Pole 2 operates CW)	Sequential (Pole 1 operates before Pole 2, either CW, CCW, or both)
	SPDT	SPDT DPDT	DPDT	DPDT
Pretravel	65° max.	65° max.	18° max.	Pole 1: 15° Pole 2: add'l 10°
Different. travel	40° max.	40° max.	10° max.	each pole: 5°
Overtravel	20° min.	20° min.	57° min.	48° min.
Oper. torque	0,45 Nm [4 in-lb]		0,45 Nm [4 in-lb]	0,45 Nm [4 in-lb]
Action	Maintained		CW & CCW (Momentary)	
Op. temp range⁶	-1 °C to 121 °C [30 °F to 250°F] (for low temp, high temp, or preloaded versions, see page 11-12)			-12 °C to 121 °C [10 °F to 250°F] (for low temp, high temp, or preloaded versions, see page 11-12)

Circuitry	Contacts	Body Style ⁵	Conduit (NPT)	Options				
SPDT 	Silver	Plug-in	0.5 in		LSQ300	LSN1A	CENTER NEUTRAL (Momentary) 	SEQUENCE (Momentary)
	Gold ³	Plug-in	0.5 in		—	LSN1E		
	Silver	Plug-in	0.5 in	120 V Ind. lte ⁴	—	LSN5A		
	Silver	Plug-in	0.5 in	240 V Ind. lte ⁴	—	LSN8A		
	Silver	Non-plug-in	0.5 in		—	LSN3K		
DPDT 	Silver	Plug-in	0.75 in		—	LSN2B	LSM2D	LSL2C
	Silver	Plug-in	0.5 in		—	LSN6B	LSM6D	LSL6C
	Gold ³	Plug-in	0.5 in		—	—	LSM6U	—
	Silver	Non-plug-in	0.75 in		—	LSN4L	LSM4N	LSL4M
	Silver	Non-plug-in	0.5 in		—	LSN7L	LSM7N	LSL7M

¹ Mechanical trip before electrical trip.

² Total travel is approximately 80° max. Maintained contact switch normally used with LSZ53 yoke actuator.

³ Gold-plated contacts

⁴ Use at voltage indicated for light. Wired to NO circuit. Upper temperature limit for lighted units is 93°C [200 °F].

⁵ Plug-in listings include base receptacle

⁶ Completely fluorocarbon-sealed switches are preferred for temperatures above 93 °C [200 °F].

NOTE: Same polarity each pole.

To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAC1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAB1A limit switch.

HDLS Series

Figure 2. MICRO SWITCH™ HDLS side rotary (single pole) dimensions

SPDT Plug-in (mm[in])



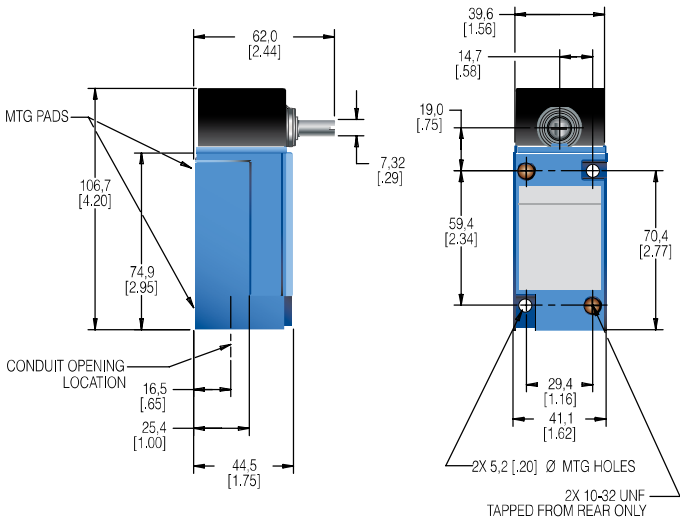


Figure 3. MICRO SWITCH™ HDLS side rotary (double pole) dimensions


DPDT Plug-in (mm[in])

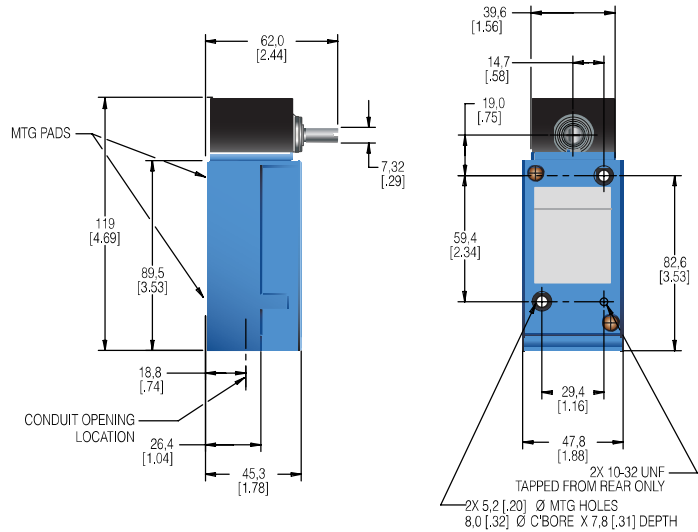

SPDT Non-plug-in (mm[in])

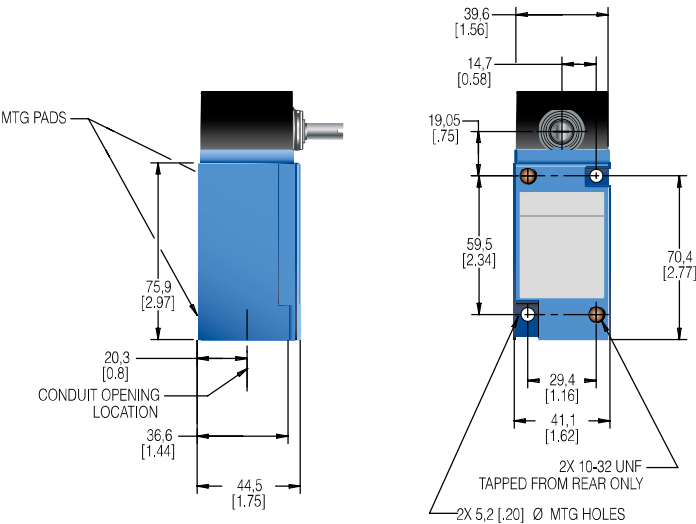

DPDT Non-plug-in (mm[in])

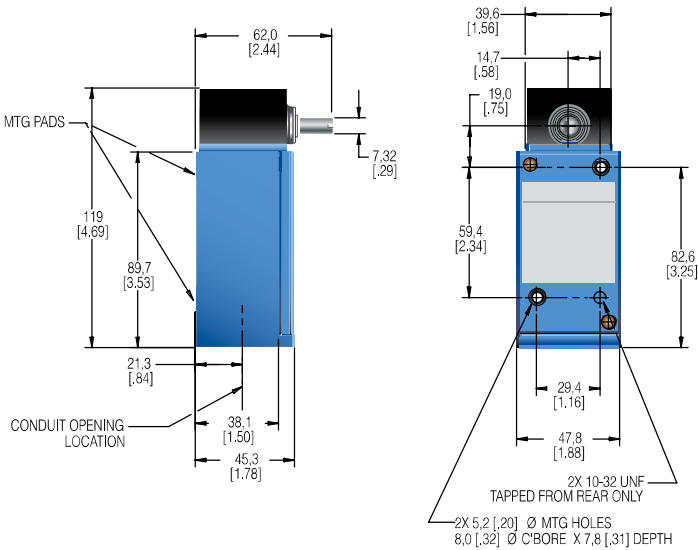

MICRO SWITCH™ Heavy-Duty Limit Switches

TOP ROTARY • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS



Top Rotary (LSB)	
Description	Increased overtravel (100° min.). Uses same levers as side rotary
	SPDT
	Snap Action 1NO/1NC 3 4 1 2 0° 15° 25° 135° ↓ ↑
	DPDT
	Snap Action 2NO/2NC 3 4 1 2 7 8 5 6 1-2/5-6 3-4/7-8 1-2/5-6 0° 13° 25° 135° ↓ ↑
	Contact closed ■ Contact open □
Pretravel	25° max.
Different. travel	10° max.
Overtravel	110° min.
Oper. torque	0,28 Nm [2.5 in lb] max.
Op. temp range ³	-12 °C to 121 °C [10 °F to 250 °F] (for low temp, high temp, or preloaded versions, see pages 11-12)

Circuitry	Contacts	Body Style ²	Conduit (NPT)	Options		
SPDT Momentary SPDT Double Break	Silver	Plug-in	0.5 in		LSB1A	—
	Gold ⁴	Plug-in	0.5 in		LSB1E	—
	Silver	Plug-in	0.5 in	120 V Ind. lte ¹	LSB5A	—
	Silver	Plug-in	0.5 in	240 V Ind. lte ¹	LSB8A	—
	Silver	Plug-in	0.5 in	24 V LED 1.5 mA max. auto polarity ¹	LSB9A	—
	Silver	Non-plug-in	0.5 in		LSB3K	—
DPDT DPDT Double Break	Silver	Plug-in	0.75 in		—	LSB2B
	Silver	Plug-in	0.5 in		—	LSB6B
	Silver	Plug-in	0.75 in	120 V Ind. lte ¹	—	LSB2R
	Silver	Non-plug-in	0.75 in		—	LSB4L
	Silver	Non-plug-in	0.5 in		—	LSB7L

¹ Use at voltage indicated for light, Wired to NO circuit. Upper temperature limit for lighted units is 93 °C [200 °F]

² Plug-in listings include base receptacle

³ Completely fluorocarbon sealed switches are preferred for use in temperatures above 93 °C [200 °F]

⁴ Gold-plated contacts

NOTE: Same polarity each pole.

To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAC1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAB1A limit switch.

HDLS Series

Figure 4. MICRO SWITCH™ HDLS top rotary (single pole) dimensions

SPDT Plug-in (mm[in])



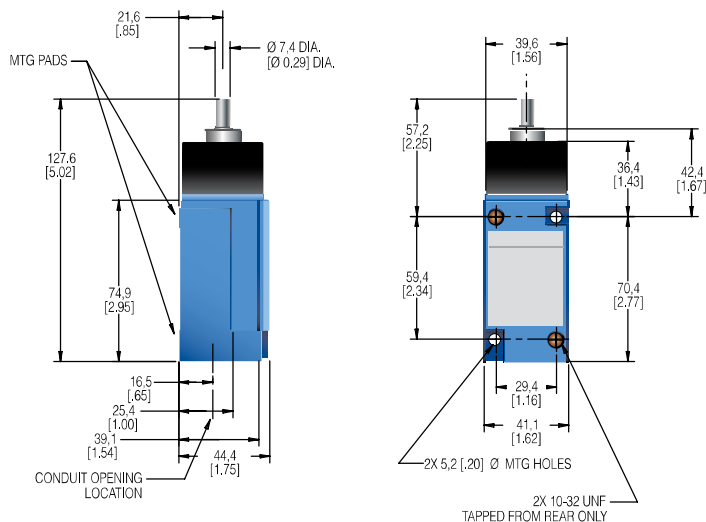


Figure 5. MICRO SWITCH™ HDLS top rotary (double pole) dimensions


DPDT Plug-in (mm[in])

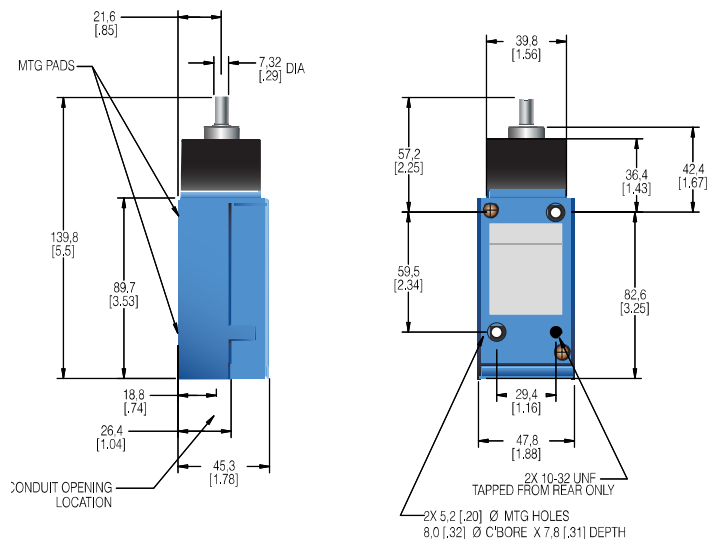

SPDT Non-plug-in (mm[in])

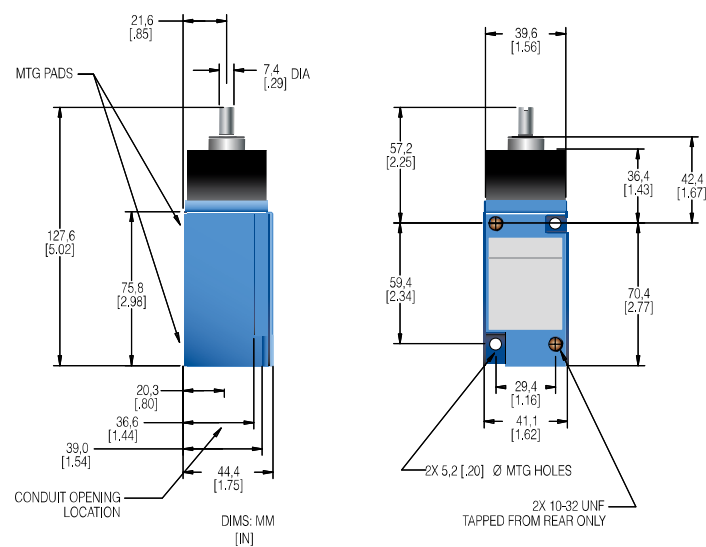



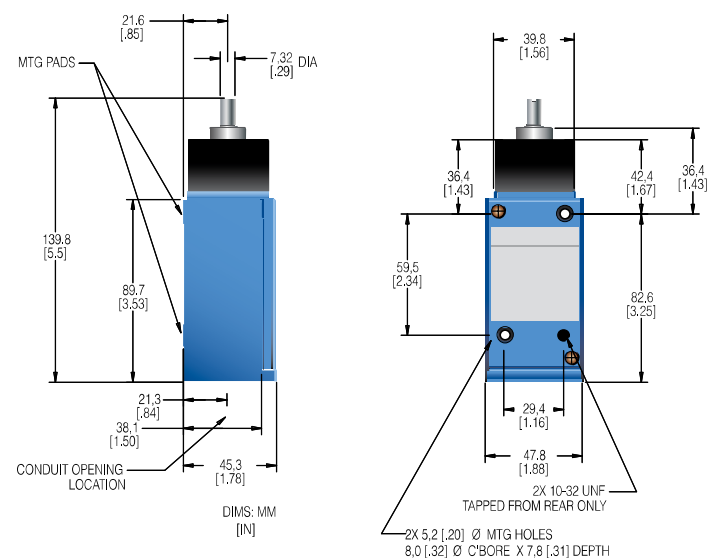













DPDT Non-plug-in (mm[in])



MICRO SWITCH™ Heavy-Duty Limit Switches

Table 2. Common levers for use with MICRO SWITCH™ HDLS Rotary Switches






Levers for use with side or top rotary actuated switches are available in a wide choice of sizes and materials. The most common listings are shown below. Rollers may be on either side of the lever to best match the external acutating mechanism.








				
LSZ51A&C fixed rotary lever, nylon roller, front/ backl	LSZ51B&D fixed rotary lever, steel roller, front/ back	LSZ59A,LSZ59B, LSZ59C,LSZ59D short fixed lever, front/back		LSZ69CA spoke lever - 152 mm [6 in]
				
LSZ55A,LSZ55B, LSZ55C,LSZ55D offset lever, front/back	LSZ60 one-way roller lever	LSZ53A, LSZ53B, LSZ53C, LSZ53D yoke lever, nylon and steel rollers, front/back placement	LSZ54R spring wire 305 mm [12 in]	
				
LSZ52A, LSZ52B, LSZ52C, LSZ52D adj. lever, nylon/ steel, front/back	LSZ52J adjustable lever, nylon roller Ø 25,4 mm [Ø 1 in]	LSZ52K adjustable lever, nylon roller Ø 38,1 mm [Ø 1.5 in]	LSZ54M aluminum rod Ø 140 mm [Ø 5.5 in]	LSZ61 loop 152 mm [6 in]
				
				
				
				LSZ67AA* Plastic conveyor roller
				LSZ68 rod w/ spring 305 mm [12 in]
				LSZ54N stainless steel rod 330 mm [13 in]

* May require orientation of switch and lever to enable gravity to help restore free position of switch.

HDLS Series

Table 3. HDLS SERIES ACTUATOR CODE TABLE (see previous page)

	Catalog Listing	Material	Rod/Roller Dia. mm [in]	Rod/Roller Width mm [in]	Roller Mounting
	Fixed 38,1 mm [1.5 in] radius				
	–	Rollerless	n/a	n/a	n/a
	LSZ51A	Nylon	19 [0.75]	6,35 [0.25]	Front
	LSZ51B	Steel	19 [0.75]	6,35 [0.25]	Front
	LSZ51C	Nylon	19 [0.75]	6,35 [0.25]	Back
	LSZ51D	Steel	19 [0.75]	6,35 [0.25]	Back
	LSZ51F	Nylon	25,4 [1.0]	12,7 [0.50]	Front
	LSZ51G	Nylon	38,1 [1.5]	6,35 [0.25]	Front
	LSZ51J	Nylon	25,4 [1.0]	12,7 [0.50]	Back
	LSZ51L	Ball bearing	19 [0.75]	6,35 [0.25]	Back
	LSZ51M	Nylon	19 [0.75]	31,7 [1.25]	Back
	LSZ51N	Steel	19 [0.75]	31,7 [1.25]	Front
	LSZ51P	Nylon	19 [0.75]	12,7 [0.50]	Front
	Adjustable 38,1 mm to 89,0 mm [1.5 in to 3.5 in] radius				
	–	Rollerless	n/a	n/a	n/a
	LSZ52A	Nylon	19 [0.75]	6,35 [0.25]	Back
	LSZ52B	Steel	19 [0.75]	6,35 [0.25]	Back
	LSZ52C	Nylon	19 [0.75]	6,35 [0.25]	Front
	LSZ52D	Steel	19 [0.75]	6,35 [0.25]	Front
	LSZ52E	Nylon	19 [0.75]	33,0 [1.30]	Front
	LSZ52J	Nylon	25,4 [1.0]	12,7 [0.50]	Front
	LSZ52K	Nylon	38,1 [1.5]	6,35 [0.25]	Front
	LSZ52L	Ball bearing	19 [0.75]	6,35 [0.25]	Front
	LSZ52M	Nylon	50,8 [2.0]	6,35 [0.25]	Front
	LSZ52N	Nylon	19 [0.75]	12,7 [0.50]	Front
		Yoke – 38,1 mm [1.5 in] radius			
LSZ53A		Nylon	19 [0.75]	6,35 [0.25]	Front/Back
LSZ53B		Steel	19 [0.75]	6,35 [0.25]	Front/Back
LSZ53D		Steel	19 [0.75]	6,35 [0.25]	Front/Front
LSZ53E		Nylon	19 [0.75]	6,35 [0.25]	Back/Front
LSZ53M		Nylon	19 [0.75]	31,7 [1.25]	Back/Front
LSZ53P		Steel	19 [0.75]	6,35 [0.25]	Back/Back
LSZ53S		Nylon	19 [0.75]	6,35 [0.25]	Back/Back
	Rod				
	–	Hub only	n/a	n/a	n/a
	LSZ54M	Alum, 140 mm [5.5 in]	Ø 3,2 [Ø 0.125]	n/a	n/a
	LSZ54N	Stainless, 330 mm [13 in]	Ø 3,2 [Ø 0.125]	n/a	n/a
	LSZ54R	SST spring wire, 305 mm [12 in]	Ø 1,9 [Ø 0.075]	n/a	n/a
	LSZ54V	Flex cable (tin plated steel), 122 mm [4.8 in]	Ø 4,8 [Ø 0.19]	n/a	n/a
	LSZ54P	Plastic rod, 305 mm [12 in]	Ø 6,85 [Ø 0.27]	n/a	n/a
	LSZ54W	Plastic rod, 183 mm [7.2 in]	Ø 6,85 [Ø 0.27]	n/a	n/a
	LSZ59T	330 [13] stainless steel	Ø 4,8 [Ø 0.19]	n/a	n/a
	Spoke				
	LSZ69CA	152 mm [6.0 in] Stainless	3,2 [0.125]	n/a	n/a

	Catalog Listing	Material	Rod/Roller Dia. mm [in]	Rod/Roller Width mm [in]	Roller Mounting
Fixed 38,1 mm [1.5 in] radius					
	—	Rollerless	n/a	n/a	n/a
	LSZ55A	Nylon	19 [0.75]	6,35 [0.25]	Back
	LSZ55B	Steel	19 [0.75]	6,35 [0.25]	Back
	LSZ55C	Nylon	19 [0.75]	6,35 [0.25]	Front
	LSZ55D	Steel	19 [0.75]	6,35 [0.25]	Front
	LSZ55E	Nylon	19 [0.75]	12,7 [0.50]	Front
	LSZ55K	Nylon	38,1 [1.5]	6,35 [0.25]	Front
Short fixed - 33 mm [1.3 in] radius					
	LSZ59A	Nylon	19 [0.75]	6,35 [0.25]	Front
	LSZ59B	Steel	19 [0.75]	6,35 [0.25]	Front
	LSZ59C	Nylon	19 [0.75]	6,35 [0.25]	Back
	LSZ59D	Steel	19 [0.75]	6,35 [0.25]	Back
38,1 mm [1.5 in] radius one-way roller lever					
	LSZ60A	Nylon	19 [0.75]	6,35 [0.25]	Front
	LSZ60B	Steel	19 [0.75]	6,35 [0.25]	Front
Flexible loop					
	LSZ61	Ø 4,8 [Ø 0.19] Nylatron	152 mm [6 in] flexible loop		
	LSZ618	Ø 4,8 [Ø 0.19] Nylatron	241 mm [9.5 in] flexible loop		
	LSZ54	Hub only	n/a	n/a	n/a
Spring rod					
	LSZ68	Delrin rod, 305 [12]	Ø 6,35 [Ø 0.25]	n/a	n/a
	LSZ617	Delrin rod, 406 [16]	Ø 6,35 [Ø 0.25]	n/a	n/a
	LSZ686	Delrin rod, 152 [6]	Ø 6,35 [Ø 0.25]	n/a	n/a
Rubber roller levers					
	LSZ51Y 38,1 mm [1.5 in] radius (std.)	Rubber	50 [2.0]	12,7 [0.50]	front
	LSZ55Y 38,1 mm [1.5 in] radius (offset)	Rubber	50 [2.0]	12,7 [0.50]	front
	LSZ52Y 38,1 mm to 89,0 mm [1.5 in to 3.5 in] radius (adjustable)	Rubber	50 [2.0]	12,7 [0.50]	front
Plastic roller levers					
	LSZ67AA* (conveyor)	Plastic	38,1 [1.5]	96,5 [3.8]	n/a

* may require orientation of switch and lever to enable gravity to help restore free position of switch.

MICRO SWITCH™ Heavy-Duty Limit Switches

MICRO SWITCH™ HDLS SIDE ROTARY LEVERS' CAM TRACKING

Levers for side and top rotary switches are normally ordered as separate catalog listings. They also may be ordered by including a suffix to the switch catalog listing (see nomenclature tree in this document) and adding the lever price.

Figure 6. LSZ51 type levers cam tracking

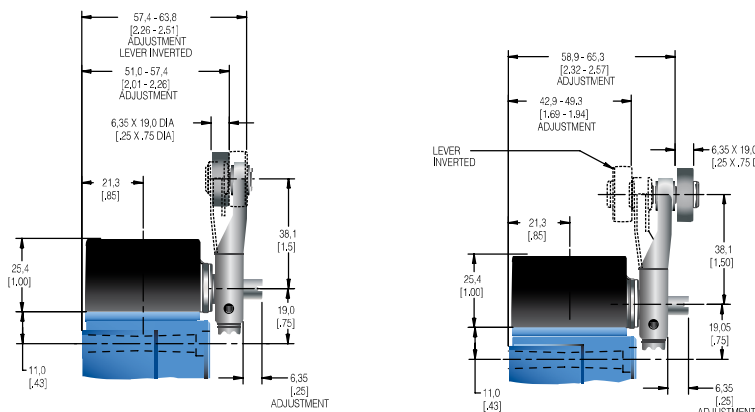


Figure 7. LSZ52 type levers cam tracking

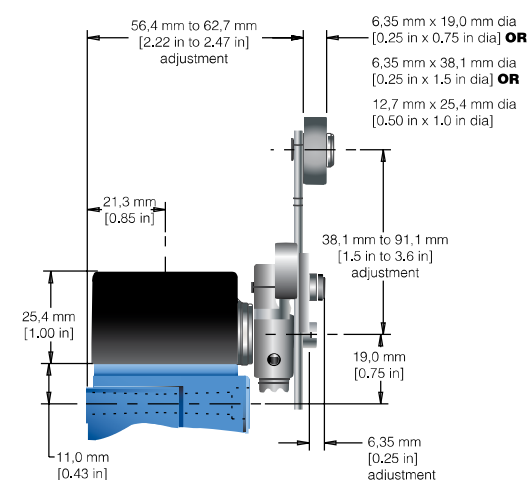


Figure 8. LSZ54 type levers cam tracking


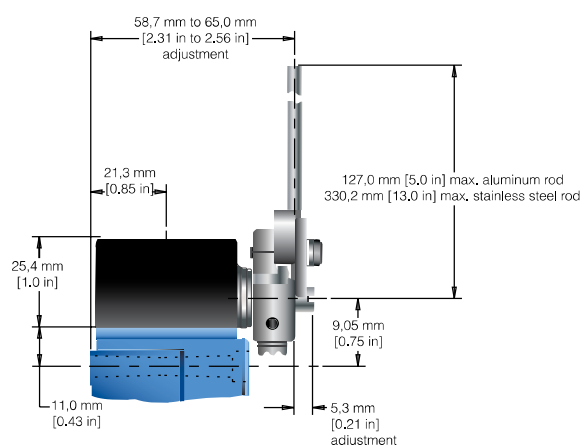


Figure 9. LSZ55 type levers cam tracking











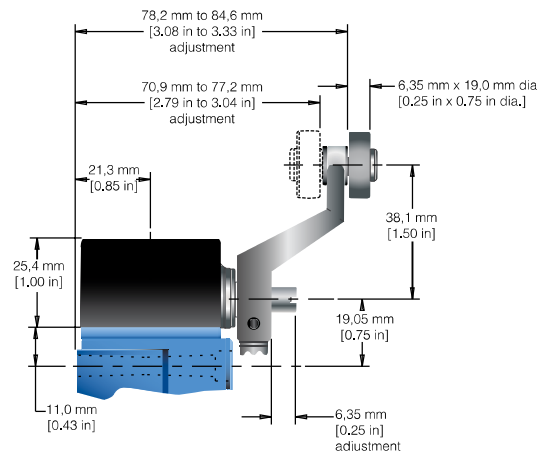




HDLS Series

TOP PLUNGERS • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS

All top plungers are momentary action.



	Plain (LSC)		Roller (LSD)		Adjustable (LSV)	
						
Description	Top plain plunger for in-line operating motion		Roller plunger can be rotated at 90° increments		Adjustable top plain plunger	
<div>Contact closed </div> <div>Contact open </div>	SPDT	DPDT	SPDT	DPDT	SPDT	DPDT
						
	Pretravel					
	1,78 mm [0.07 in]					
	Different. travel	0,38 mm [0.015 in]	0,51 mm [0.02 in]	0,38 mm [0.015 in]	0,51 mm [0.02 in]	0,38 mm [0.015 in]
Overtravel	4,83 mm [0.19 in]					
Operating point (nom.)	45,8 mm [1.805 in]		55,9 mm [2.20 in]		53 mm to 59 mm [2.08 in to 2.34 in]	
Operating force	17,8 N [4 lb] max.					
Op. temp range ³	-12 °C to 93 °C [10 °F to 200 °F] (for low temp, high temp, or preloaded versions, see page 11-12)					

Circuitry		Contacts	Body Style ²	Conduit (NPT)	Options			
SPDT 	④ Momentary ③	Silver	Plug-in	0.5 in		LSC1A	LSD1A	LSV1A
		Gold ⁴	Plug-in	0.5 in		LSC1E	LSD1E	LSV1E
	① SPDT Double Break ②	Silver	Plug-in	0.5 in	120 V Ind. lite ¹	LSC5A	LSD5A	LSV5A
		Silver	Plug-in	0.5 in	240 V Ind. lite ¹	LSC8A	LSD8A	LSV8A
		Silver	Non-plug-in	0.5 in		LSC3K	LSD3K	LSV3K
DPDT 	④ ③	Silver	Plug-in	0.75 in		LSC2B	LSD2B	LSV2B
		Silver	Plug-in	0.5 in		LSC2R	LSD2R	LSV2R
	③ ②	Silver	Plug-in	0.75 in	120 V Ind. lite ¹	LSC6B	LSD6B	LSV6B
	② ①	Silver	Non-plug-in	0.75 in		LSC4L	LSD4L	LSV4L
	① DPDT Double Break ⑤	Silver	Non-plug-in	0.5 in		LSC7L	LSD7L	LSV7L

¹ Use at voltage indicated for light. Wired to NO circuit. Upper temperature limit for lighted units is 93 °C [200 °F]

² Plug-in listings include base receptacle

³ Completely fluorocarbon sealed switches are preferred for use in temperatures above 93 °C [200 °F]

⁴ Gold-plated contacts

NOTE: Same polarity each pole.


To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSY**AC**1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSY**AB**1A limit switch.

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 10. MICRO SWITCH™ HDLS LSC Series (single pole plunger dimensions

SPDT Plug-in (mm[in])

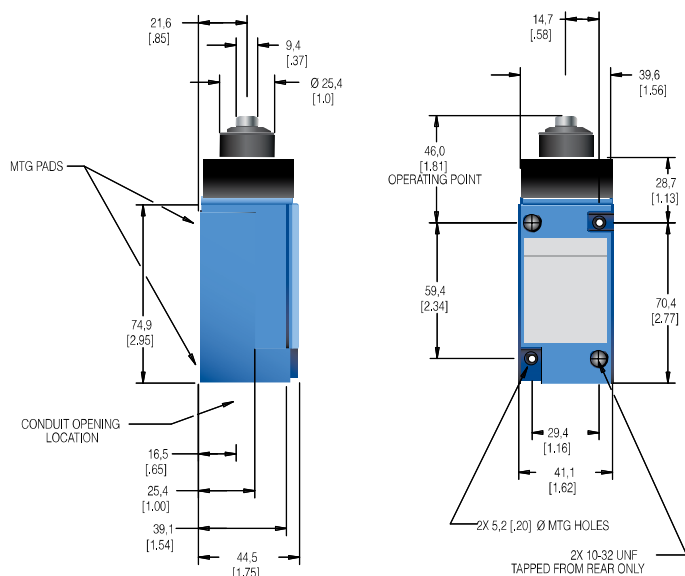

SPDT Non-plug-in (mm[in])



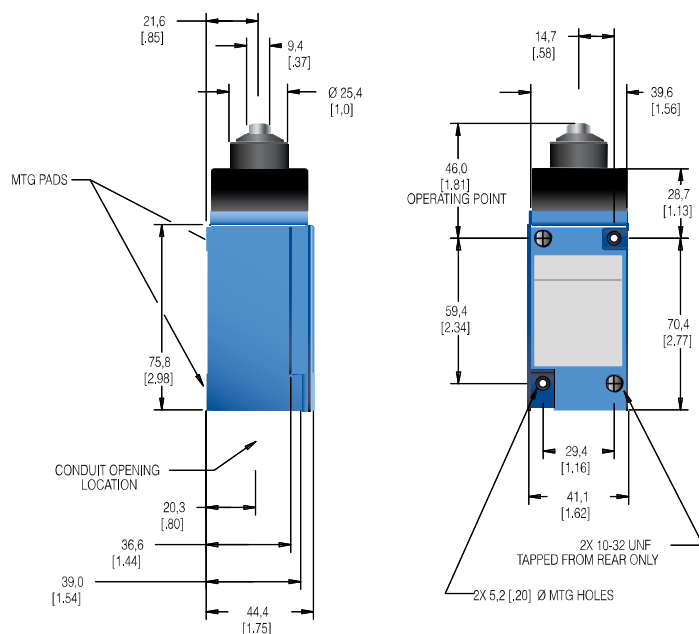


Figure 11. MICRO SWITCH™ HDLS LSC Series (double pole plunger dimensions

DPDT Plug-in (mm[in])

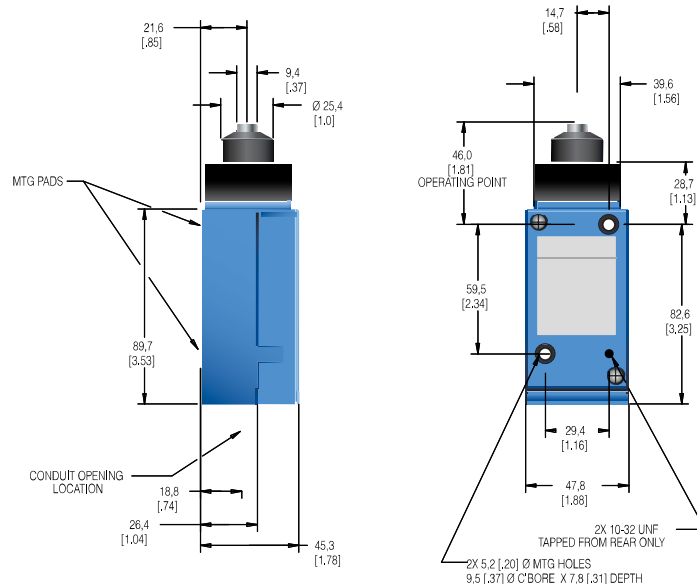

DPDT Non-plug-in (mm[in])

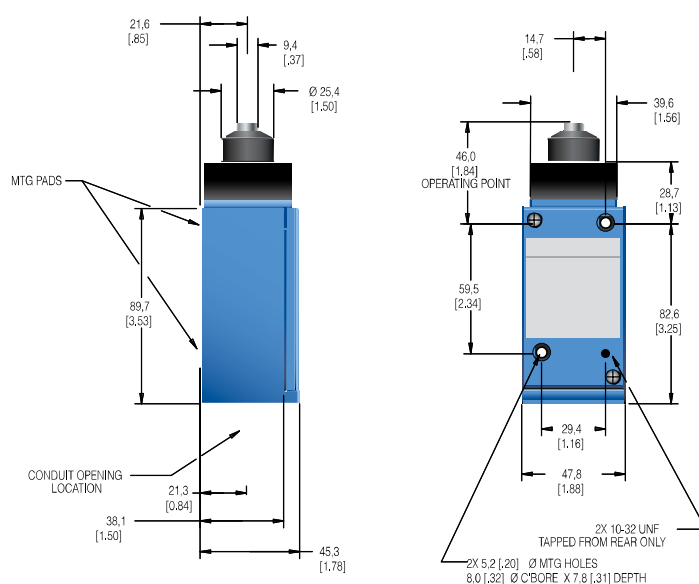


HDLS Series


Figure 12. MICRO SWITCH™ HDLS LSD Series (single pole) top roller plunger dimensions

Figure 13. MICRO SWITCH™ HDLS LSD Series (double pole) top roller plunger dimensions


SPDT Plug-in (mm[in])

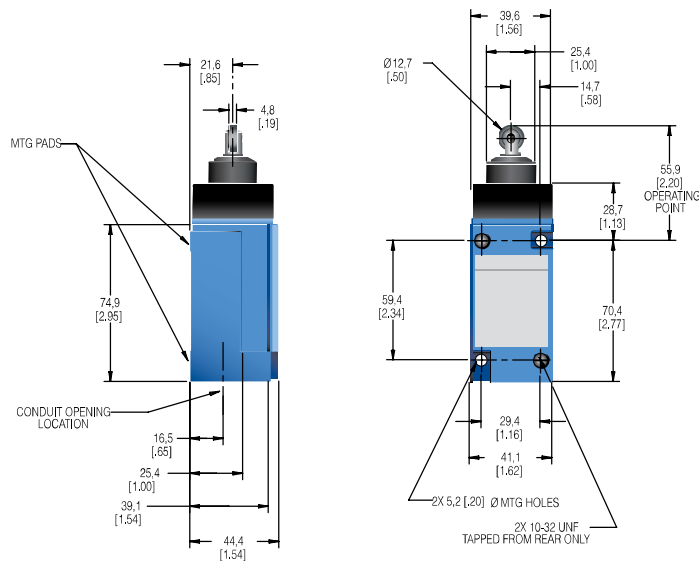


DPDT Plug-in (mm[in])

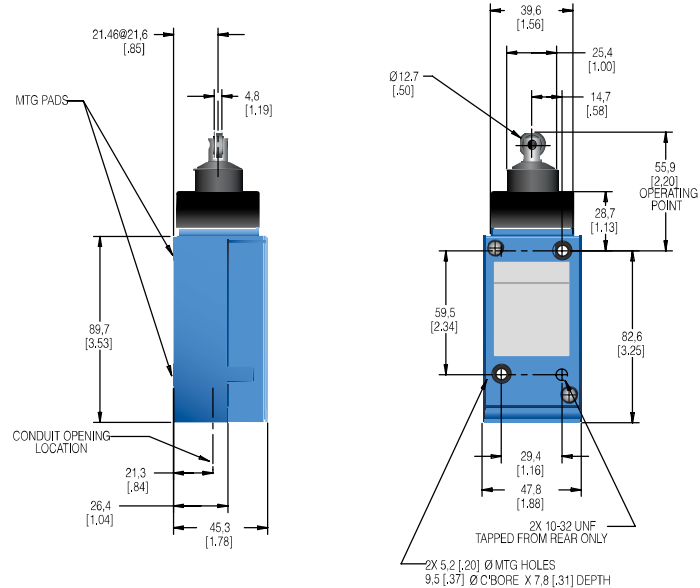

SPDT Non-plug-in (mm[in])

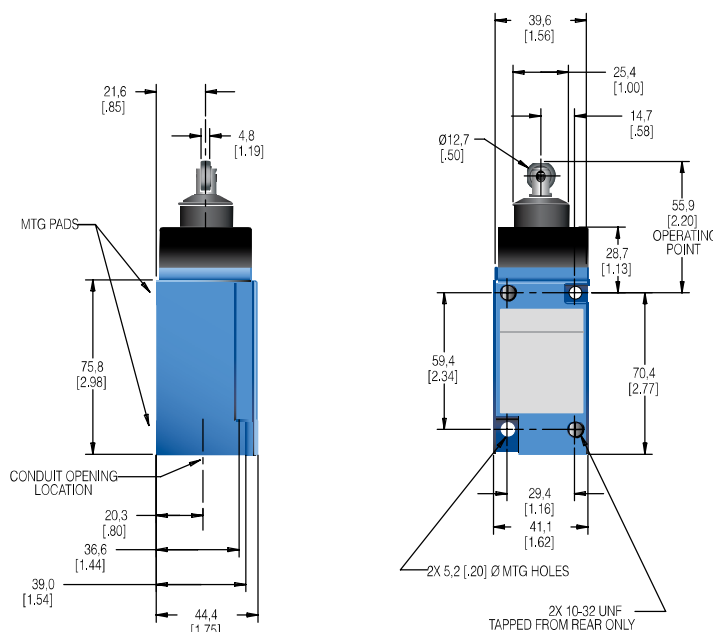


DPDT Non-plug-in (mm[in])

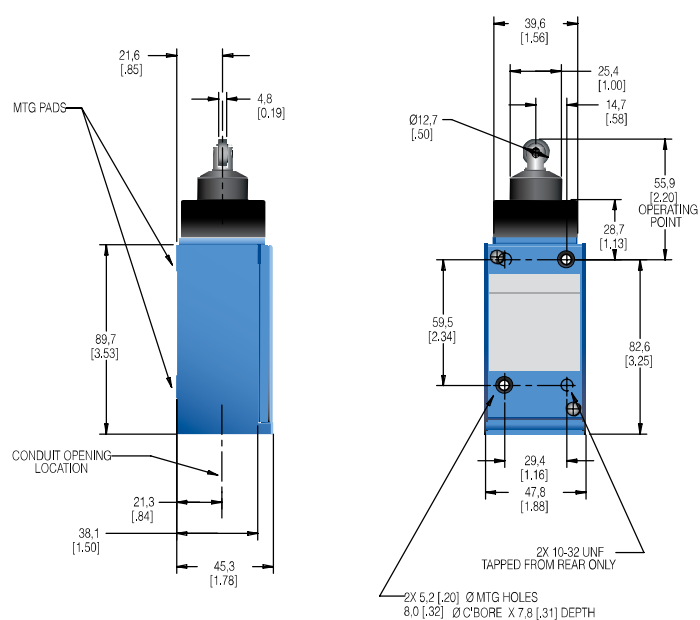

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 14. MICRO SWITCH™ HDLS LSV Series top adjustable plunger (single pole) dimensions

SPDT Plug-in (mm[in])

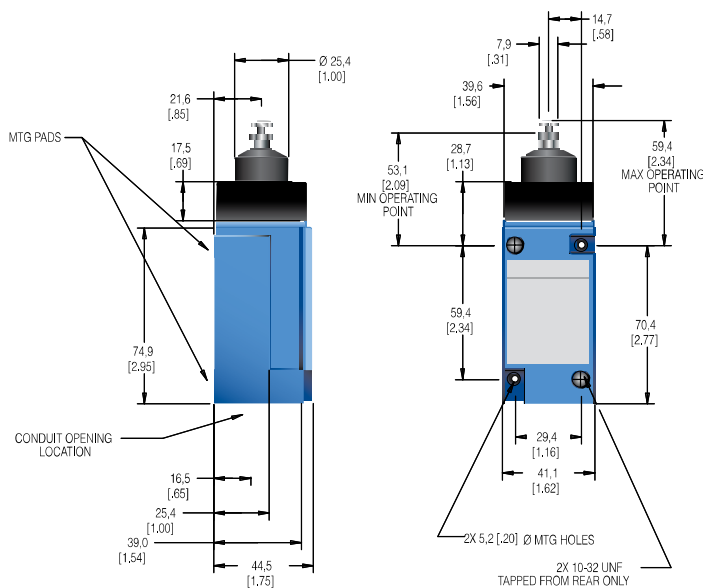

SPDT Non-plug-in (mm[in])



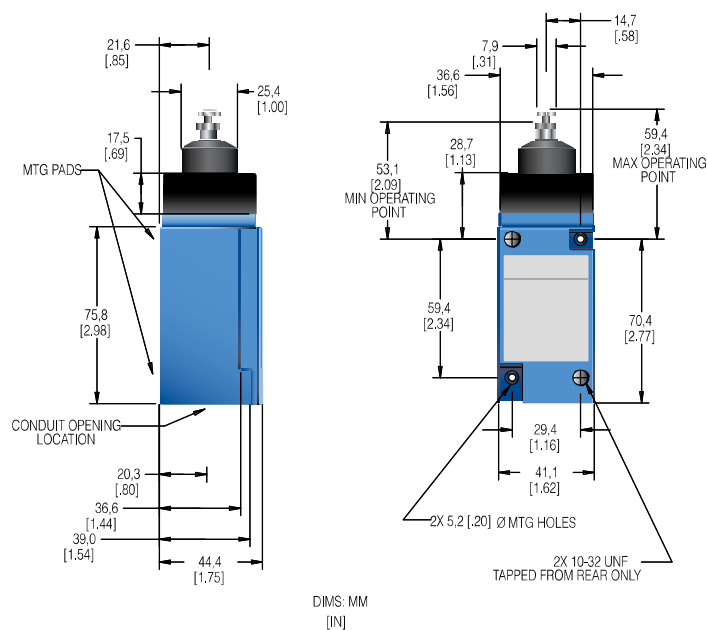


Figure 15. MICRO SWITCH™ HDLS LSV Series top adjustable plunger (double pole) dimensions

DPDT Plug-in (mm[in])

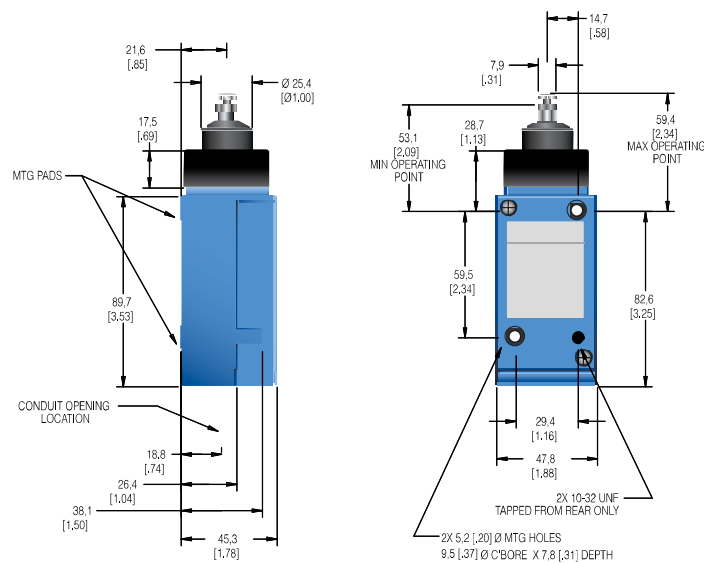

DPDT Non-plug-in (mm[in])

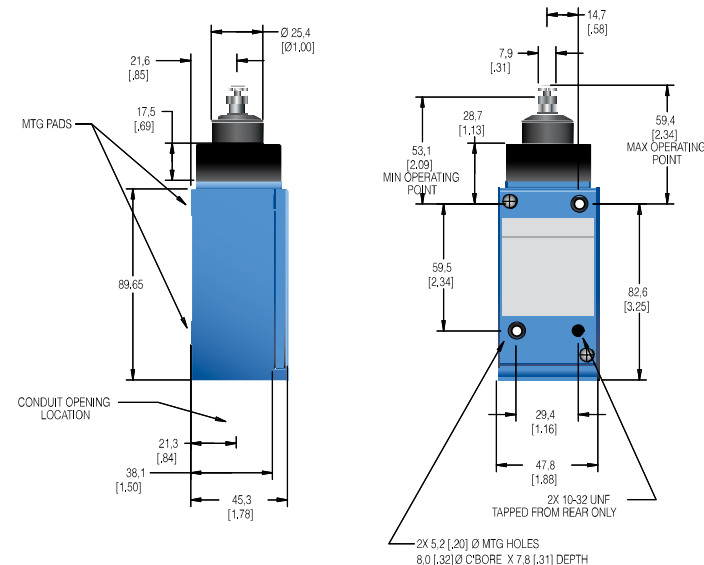

HDLS Series

SIDE PLUNGERS • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS

Heads may be positioned to accept actuation from any of four directions, 90° apart.



	Plain (LSE)	Roller (LSF)	Adjustable (LSW)	Maintained (LSG)
Description	Side plain plunger (momentary)	Side roller plunger (momentary)	Adjustable side plain plunger (momentary)	Side plain plunger with maintained contact
	Contact closed ■ Contact open □			
Pretravel	2,54 mm [0.10 in]			4,32 mm [0.17 in]
Different. travel	Single pole: 0,64 mm [0.025 in] Double pole: 0,89 mm [0.035 in]			2,29 mm [0.09 in]
Overtravel	4,83 mm [0.19 in]			2,0 mm [0.08 in]
Operating point (nominal)	33,0 mm [1.30 in]	44,1 mm [1.74 in]	41,0 mm to 47,4 mm [1.62 in to 1.87 in]	67,6 mm [1.48 in]
Operating force	26,7 N [6 lb] max.			44,5 N [10 lb] max.
Op. temp range ³	-12 °C to 93 °C [10 °F to 200°F] (for low temp, high temp, or preloaded versions, see pages 11-12)			-1 °C to 93 °C [30 °F to 200°F] (for low temp, high temp, or preloaded versions, see page 11-12)

Circuitry	Contacts	Body Style ²	Conduit (NPT)	Options				
SPDT 	Silver	Plug-in	0.5 in		LSE1A	LSF1A	LSW1A	LSG1A
	Gold ⁴	Plug-in	0.5 in		LSE1E	LSF1E	LSW1E	LSG1E
	Silver	Plug-in	0.5 in	120 V Ind. lite ¹	LSE5A	LSF5A	LSW5A	LSG5A
	Silver	Plug-in	0.5 in	240 V Ind. lite ¹	LSE8A	LSF8A	LSW8A	LSG8A
	Silver	Non-plug-in	0.5 in		LSE3K	LSF3K	LSW3K	LSG3K
DPDT 	Silver	Plug-in	0.75 in		LSE2B	LSF2B	LSW2B	LSG2B
	Silver	Plug-in	0.5 in		LSE2R	LSF2R	LSW2R	LSG2R
	Silver	Plug-in	0.75 in	120 V Ind. lite ¹	LSE6B	LSF6B	LSW6B	LSG6B
	Gold ⁴	Plug-in	0.5 in		LSE6S	-	-	-
	Silver	Non-plug-in	0.75 in		LSE4L	LSF4L	LSW4L	LSG4L
	Silver	Non-plug-in	0.5 in		LSE7L	LSF7L	LSW7L	LSG7L

¹ Use at voltage indicated for light. Wired to NO circuit. Upper temperature limit for lighted units is 93 °C [200 °F]

² Plug-in listings include base receptacle

³ Completely fluorocarbon sealed switches are preferred for use in temperatures above 93 °C [200 °F]

⁴ Gold-plated contacts

NOTE: Same polarity each pole.

To order a fluorocarbon sealed switch, insert the letters **Y** and **C** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAC1A limit switch.

To order a low temperature, fluorosilicone sealed switch, insert the letters **Y** and **B** into the catalog listing as follows. The LSA1A limit switch is changed to a LSYAB1A limit switch.

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 16. MICRO SWITCH™ HDLS LSE Series side plain plunger (single pole) dimensions

SPDT Plug-in (mm[in])



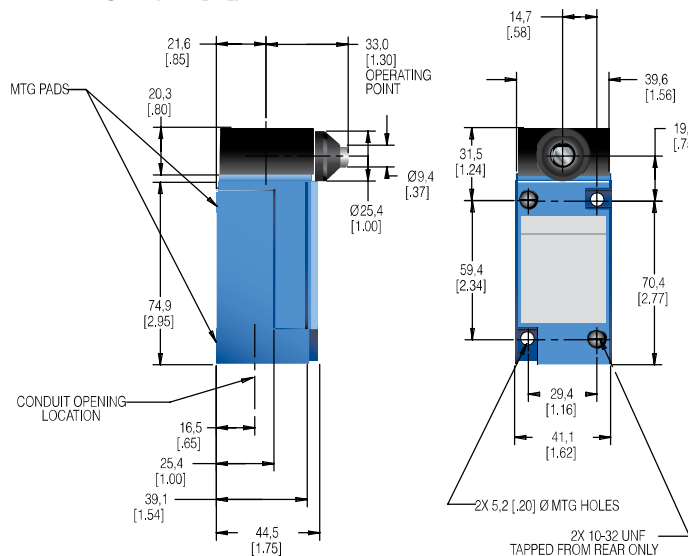


Figure 17. MICRO SWITCH™ HDLS LSE Series side plain plunger (double pole) dimensions


DPDT Plug-in (mm[in])

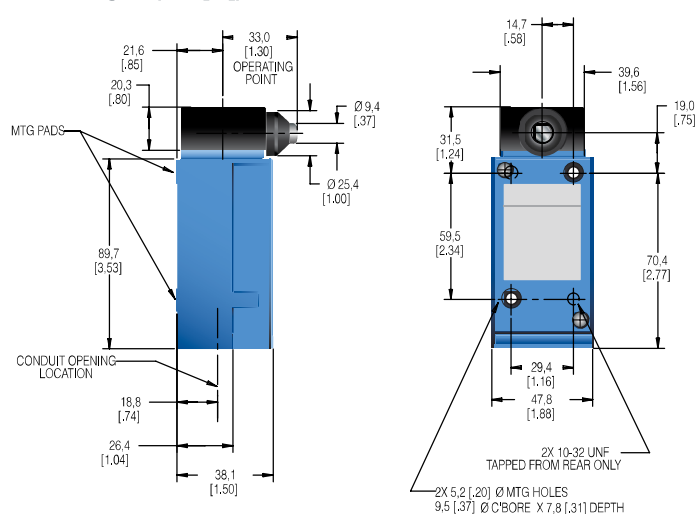

SPDT Non-plug-in (mm[in])

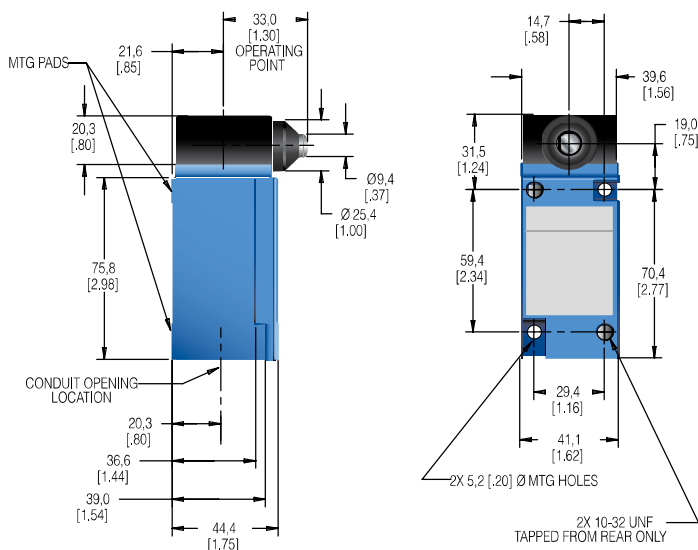


DPDT Non-plug-in (mm[in])

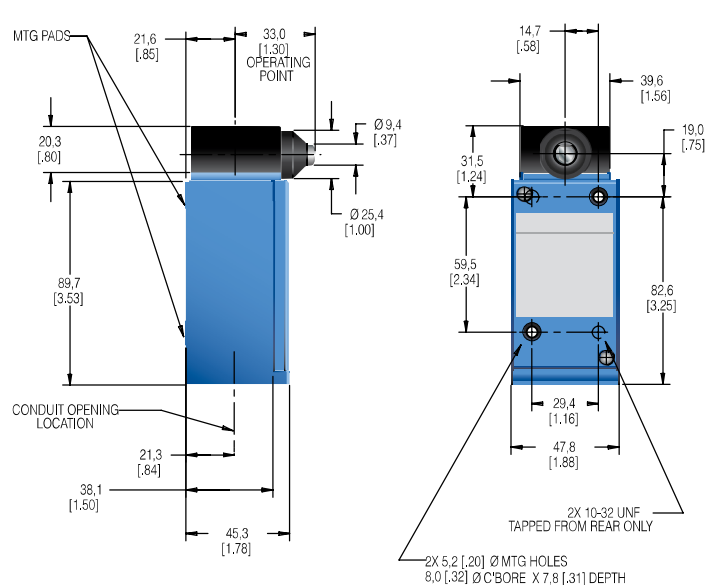

HDLS Series

Figure 18. MICRO SWITCH™ HDLS LSF Series side roller plunger (single pole) dimensions

SPDT Plug-in (mm[in])

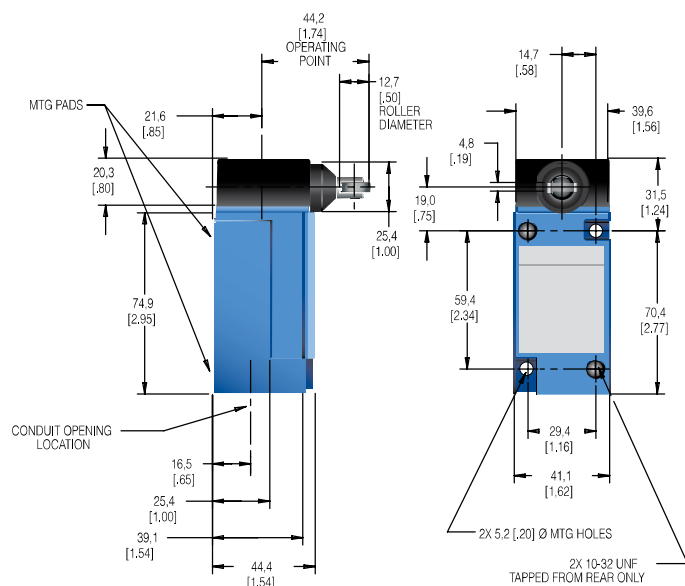

SPDT Non-plug-in (mm[in])



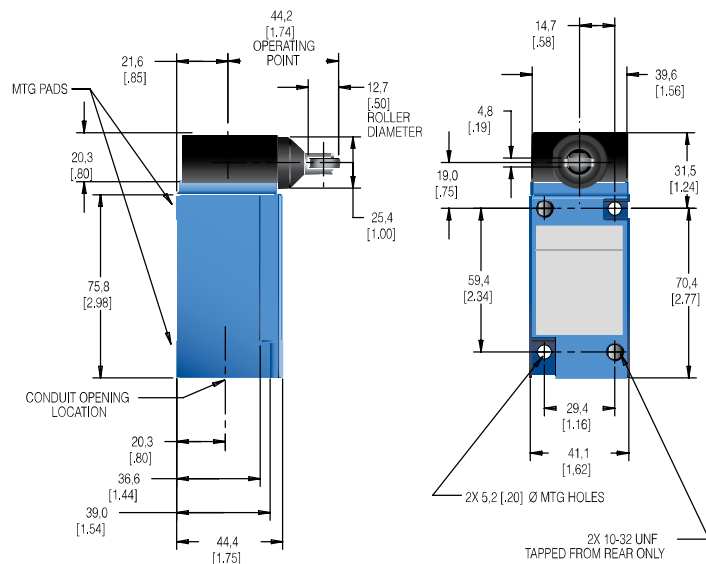


Figure 19. MICRO SWITCH™ HDLS LSF Series side roller plunger (double pole) dimensions

DPDT Plug-in (mm[in])

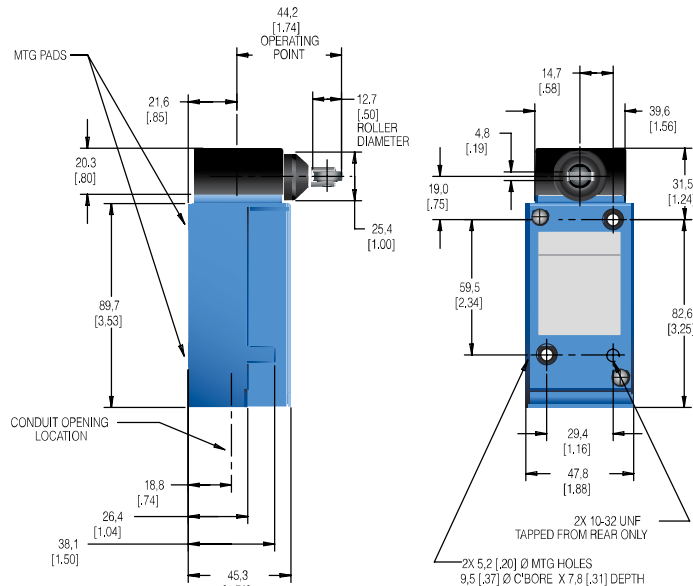

DPDT Non-plug-in (mm[in])

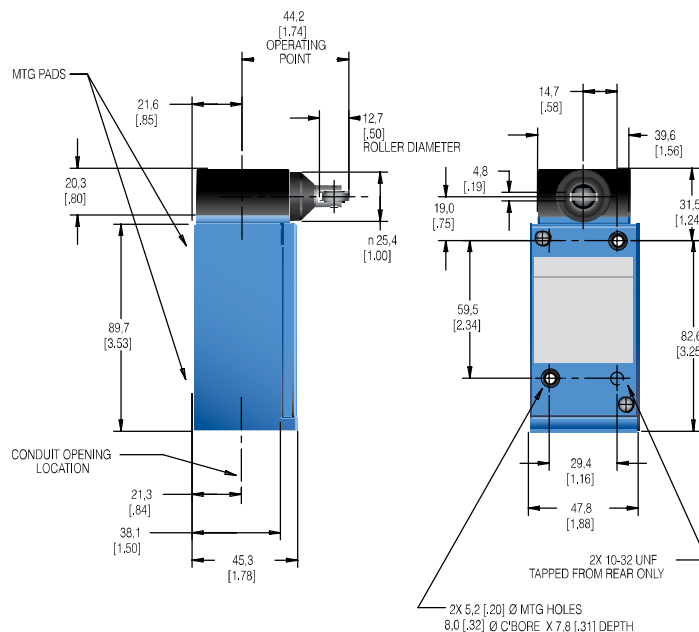

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 20. MICRO SWITCH™ HDLS LSW Series side adjustable plunger (single pole) dimensions

SPDT Plug-in (mm[in])



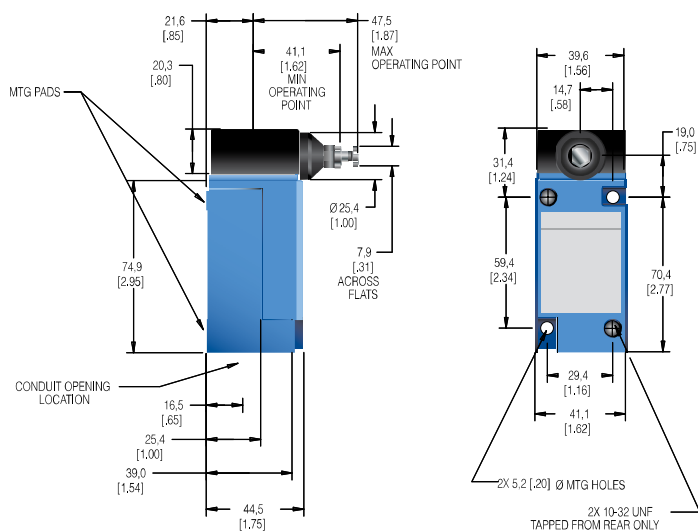


Figure 21. MICRO SWITCH™ HDLS LSW Series side adjustable plunger (double pole) dimensions


DPDT Plug-in (mm[in])

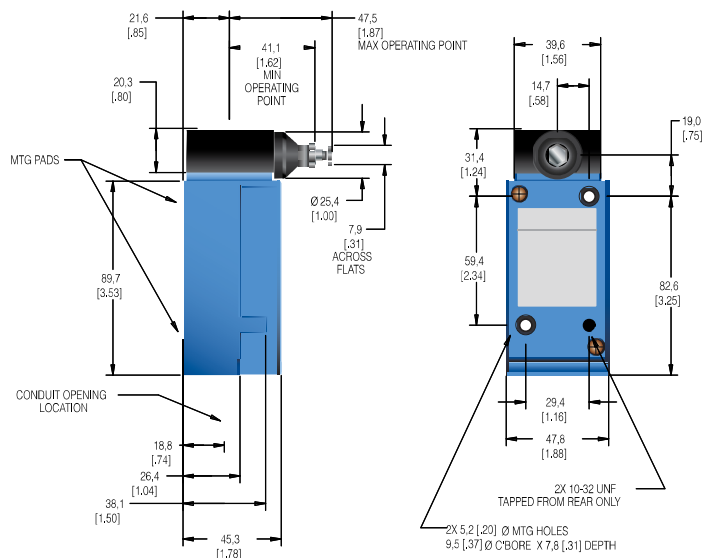

SPDT Non-plug-in (mm[in])

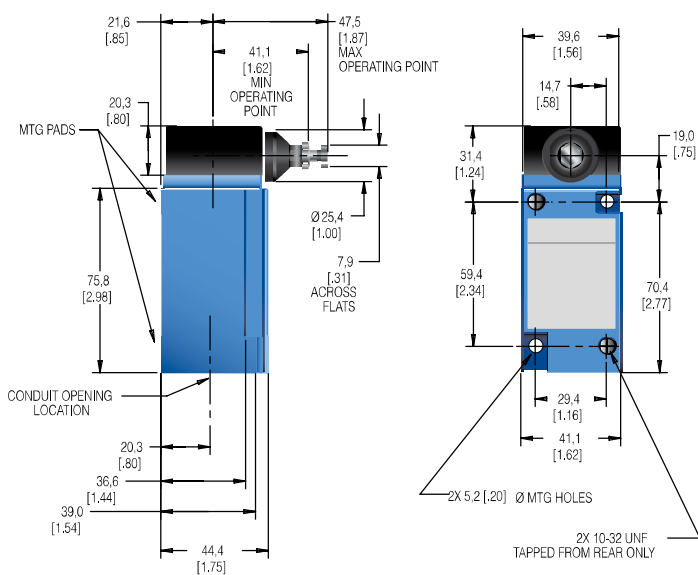

DPDT Non-plug-in (mm[in])

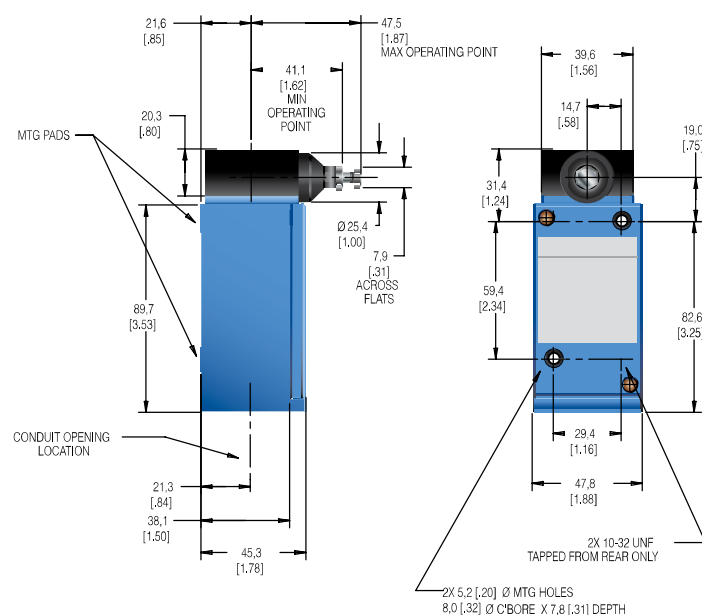

HDLS Series

Figure 22. MICRO SWITCH™ HDLS LSG Series maintained contact side plunger (single pole) dimensions

SPDT Plug-in (mm[in])



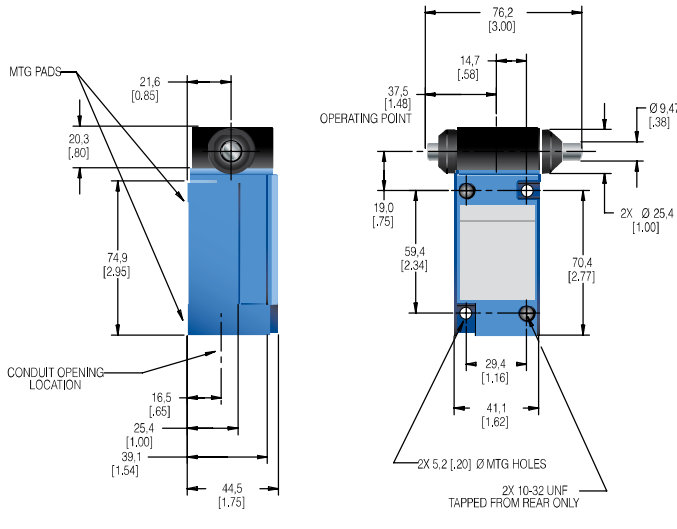


Figure 23. MICRO SWITCH™ HDLS LSG Series maintained contact side plunger (double pole) dimensions


DPDT Plug-in (mm[in])

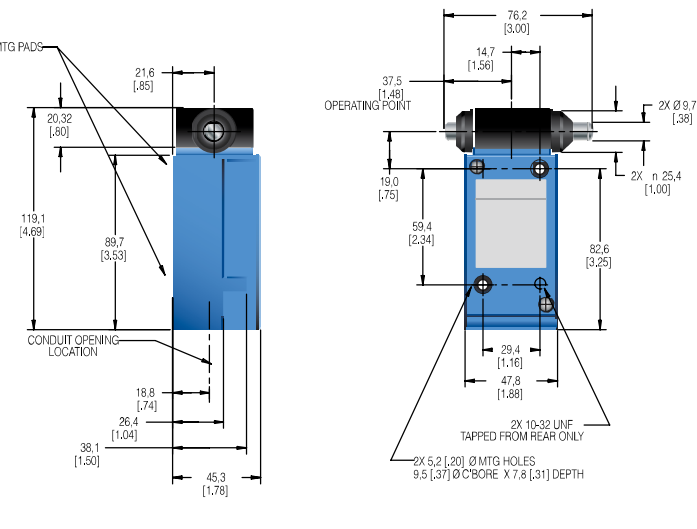

SPDT Non-plug-in (mm[in])

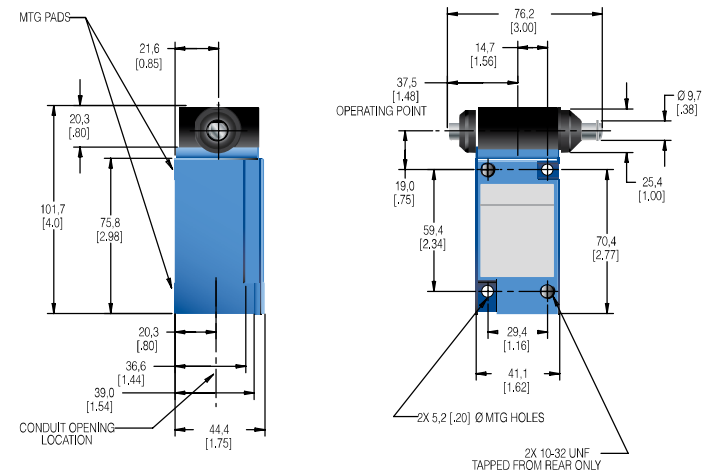

DPDT Non-plug-in (mm[in])

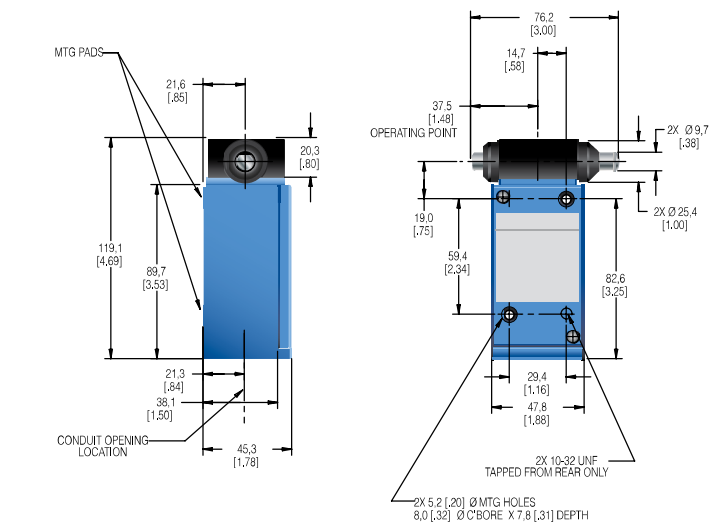

WOBBLES • MICRO SWITCH™ HDLS SERIES ORDER GUIDE/RECOMMENDED LISTINGS

Circuitry		Contacts	Body Style ²	Conduit (NPT)	Options					
SPDT		Silver	Plug-in	0.5 in		LSJ1A-7A	LSJ1A-7N	LSJ1A-7M	LSK1A-8A	LSK1A-8C
		Gold ⁴	Plug-in	0.5 in		LSJ1E-7A	—	LSJ1E-7M	LSK1E-8A	LSK1E-8C
		Silver	Plug-in	0.5 in	120 V Ind. lite ¹	LSJ5A-7A	LSJ5A-7N	LSJ5A-7M	LSK5A-8A	LSK5A-8C
		Silver	Plug-in	0.5 in	240 V Ind. lite ¹	LSJ8A-7A	LSJ8A-7N	LSJ8A-7M	LSK8A-8A	LSK8A-8C
		Silver	Non-plug-in	0.5 in		LSJ3K-7A	LSJ3K-7N	LSJ3K-7M	LSK3K-8A	LSK3K-8C
DPDT		Silver	Plug-in	0.75 in		LSJ2B-7A	LSJ2B-7N	LSJ2B-7M	LSK2B-8A	LSK2B-8C
		Silver	Plug-in	0.5 in		LSJ6B-7A	LSJ6B-7N	LSJ6B-7M	LSK6B-8A	LSK6B-8C
		Silver	Plug-in	0.75 in	120 V Ind. lite ¹	LSJ2R-7A	LSJ2R-7N	LSJ2R-7M	LSK2R-8A	LSK2R-8C
		Silver	Non-plug-in	0.75 in		LSJ4L-7A	LSJ4L-7N	LSJ4L-7M	LSK4L-8A	LSK4L-8C
		Silver	Non-plug-in	0.5 in		LSJ7L-7A	LSJ7L-7N	LSJ7L-7M	LSK7L-8A	LSK7L-8C

sensing.honeywell.com 31

HDLS Series

Figure 24. MICRO SWITCH™ HDLS LSJ__-7A Series wobble (single pole) dimensions



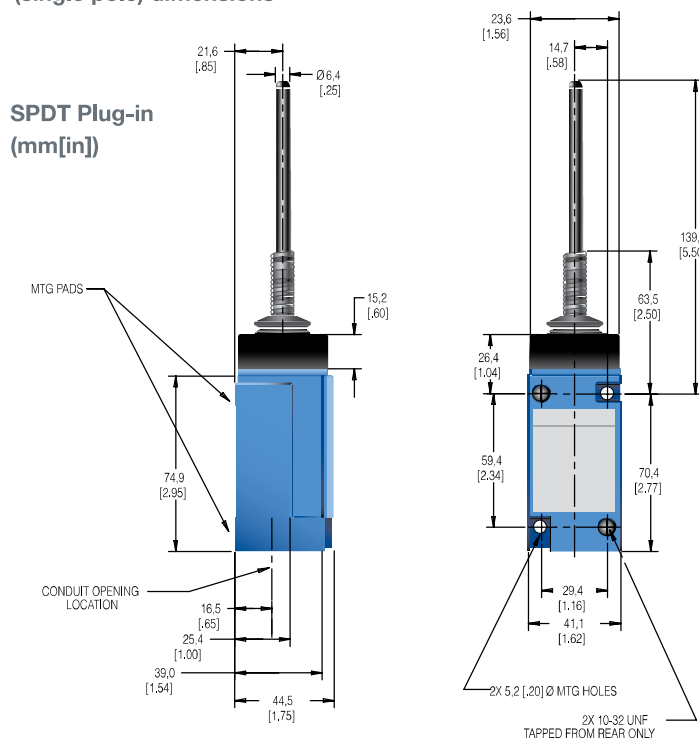



Figure 25. MICRO SWITCH™ HDLS LSJ__-7A Series wobble (double pole) dimensions

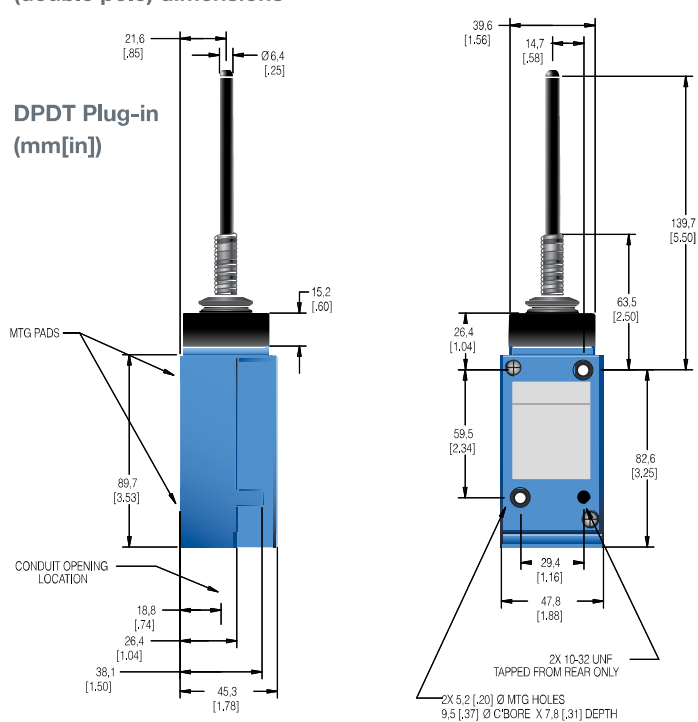

SPDT Non-plug-in (mm[in])

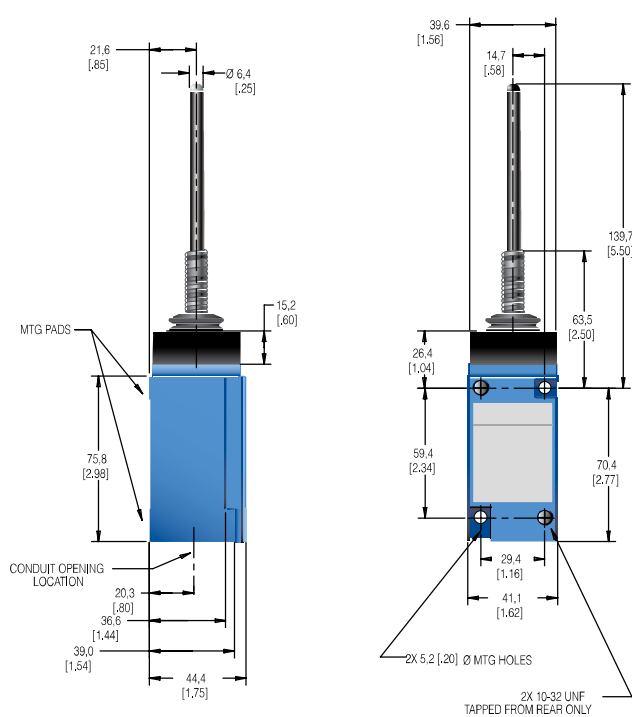

DPDT Non-plug-in (mm[in])

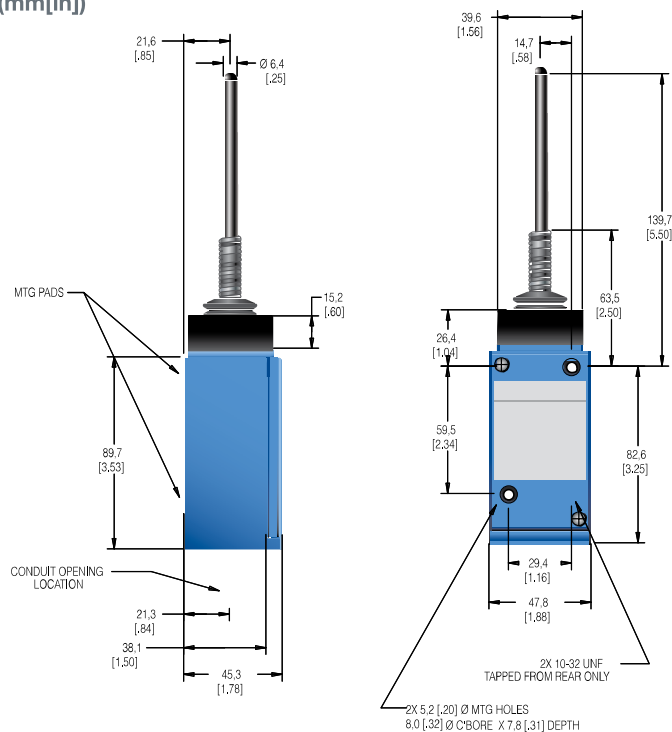

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 26. MICRO SWITCH™ HDLS LSJ_ _-7N Series wobble (single pole) dimensions



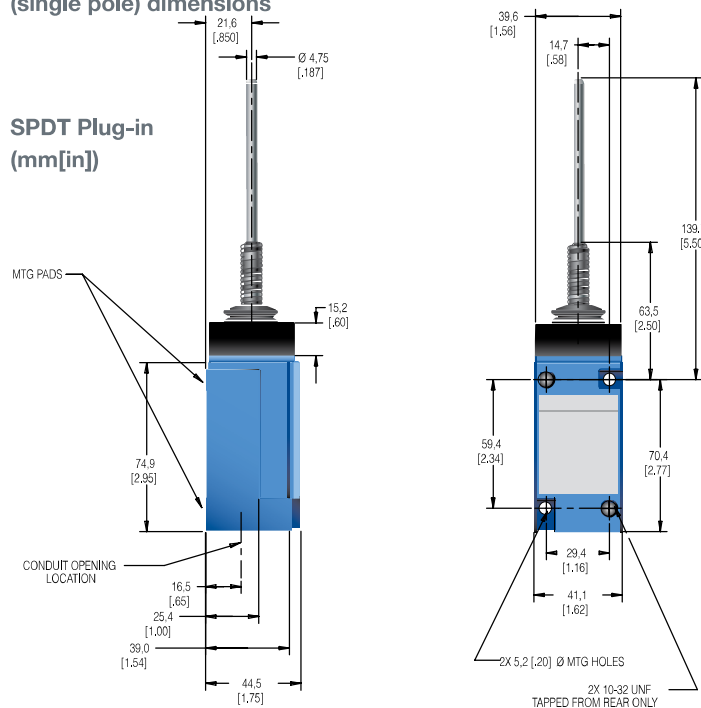



Figure 27. MICRO SWITCH™ HDLS LSJ_ _-7N Series wobble (double pole) dimensions

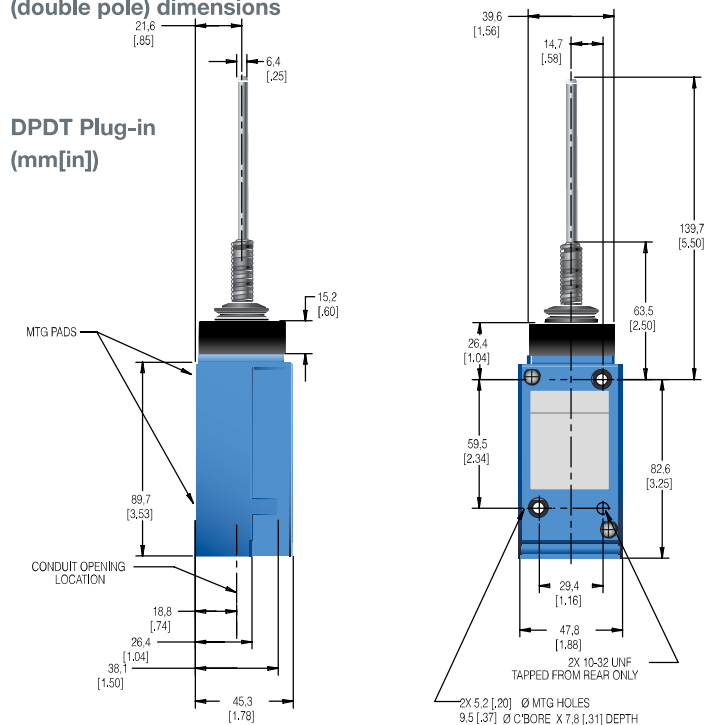

SPDT Non-plug-in (mm[in])

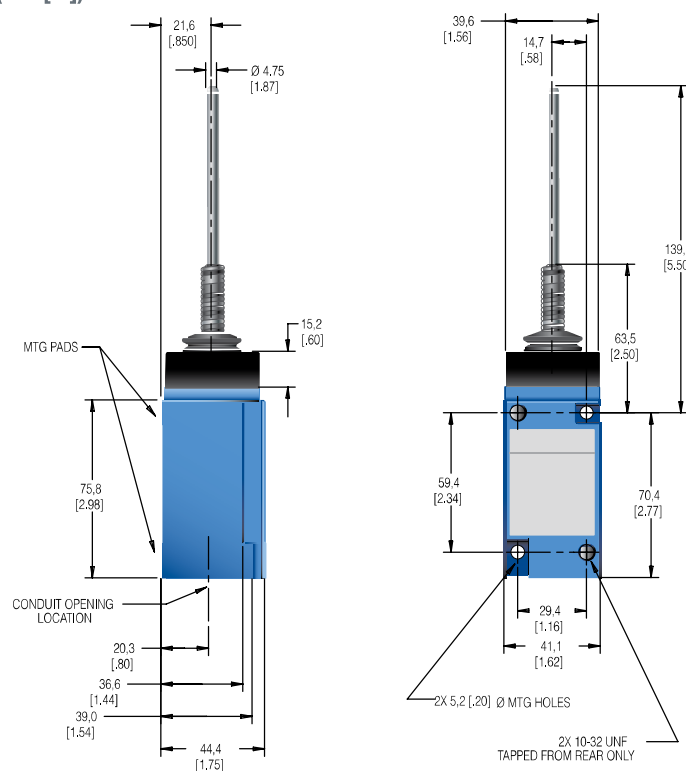

DPDT Non-plug-in (mm[in])

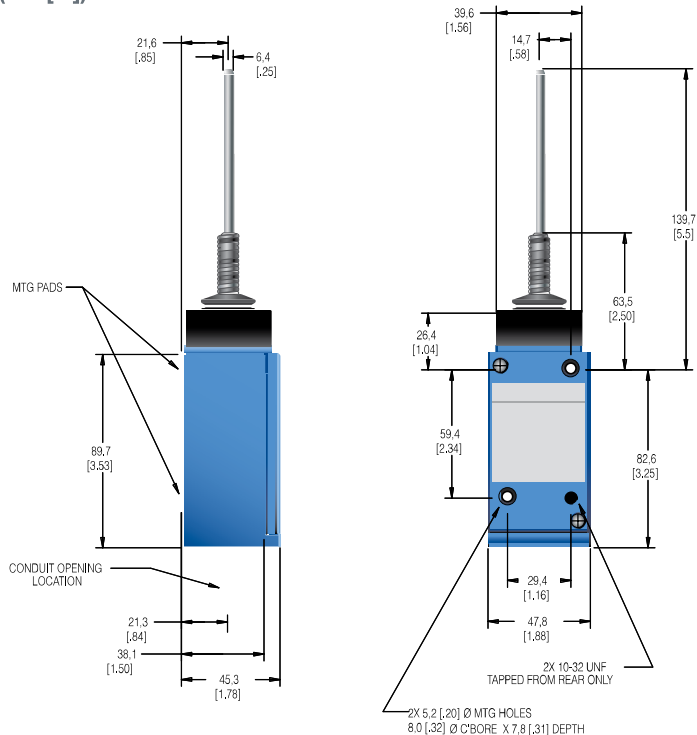

HDLS Series

Figure 28. MICRO SWITCH™ HDLS LSJ__-7M Series wobble (single pole) dimensions



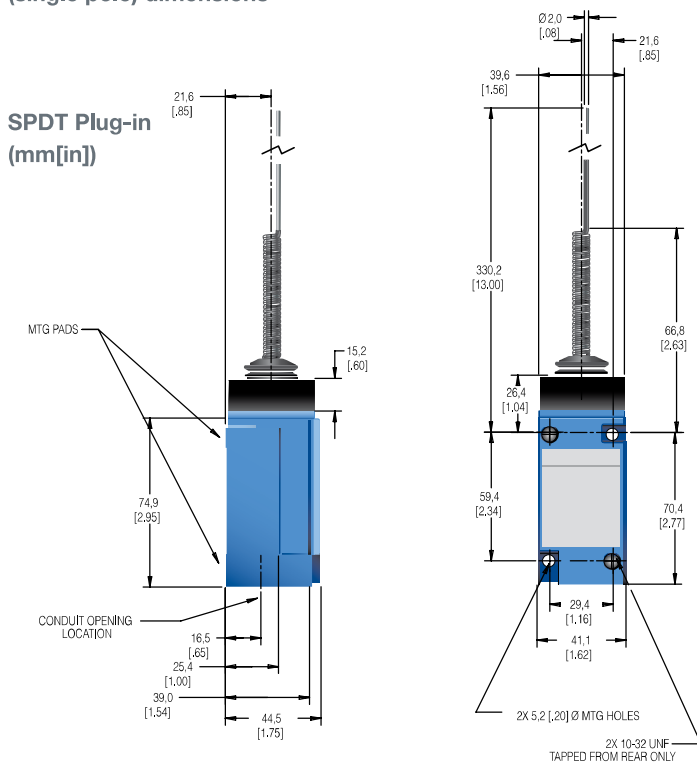


Figure 29. MICRO SWITCH™ HDLS LSJ__-7M Series wobble (double pole) dimensions

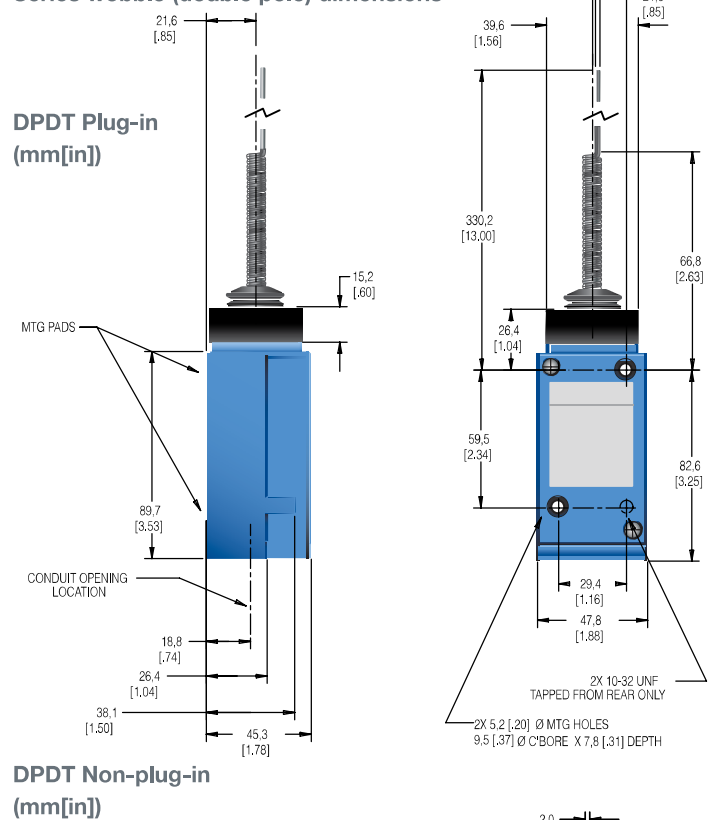

MICRO SWITCH™ Heavy-Duty Limit Switches

Figure 30. MICRO SWITCH™ HDLS LSK__-8A Series wobble (single pole) dimensions

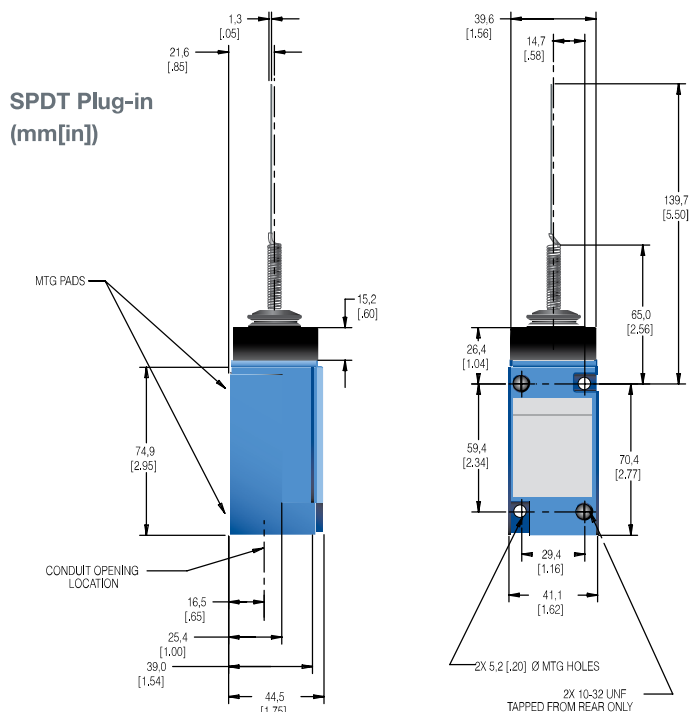

SPDT Non-plug-in (mm[in])



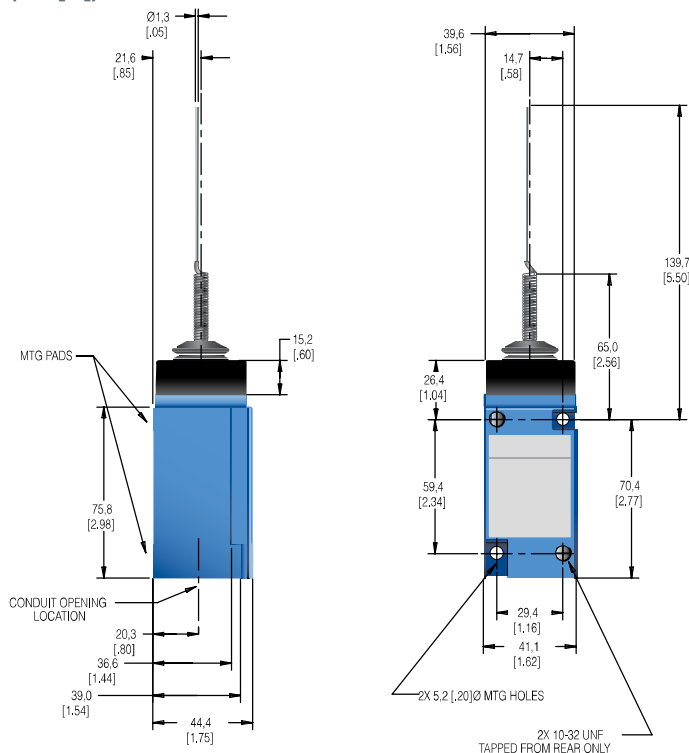


Figure 31. MICRO SWITCH™ HDLS LSK__-8A Series wobble (double pole) dimensions

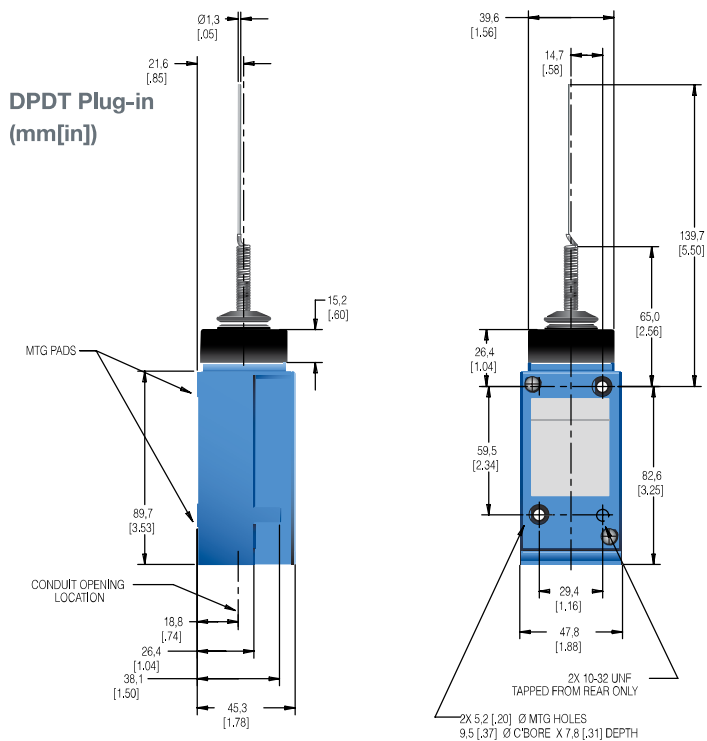

DPDT Non-plug-in (mm[in])

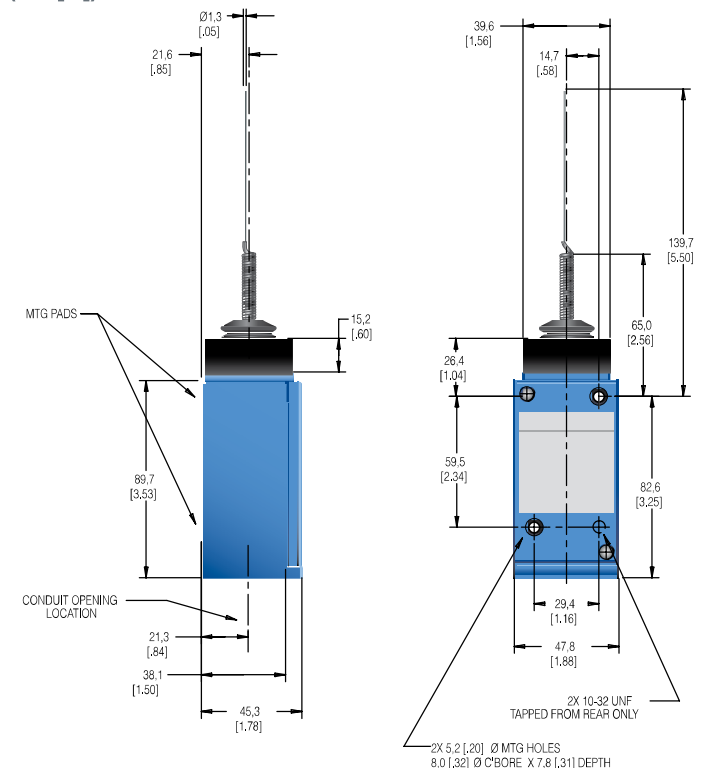

HDLS Series

Figure 32. MICRO SWITCH™ HDLS LSK_ _8C Series wobble (single pole) dimensions



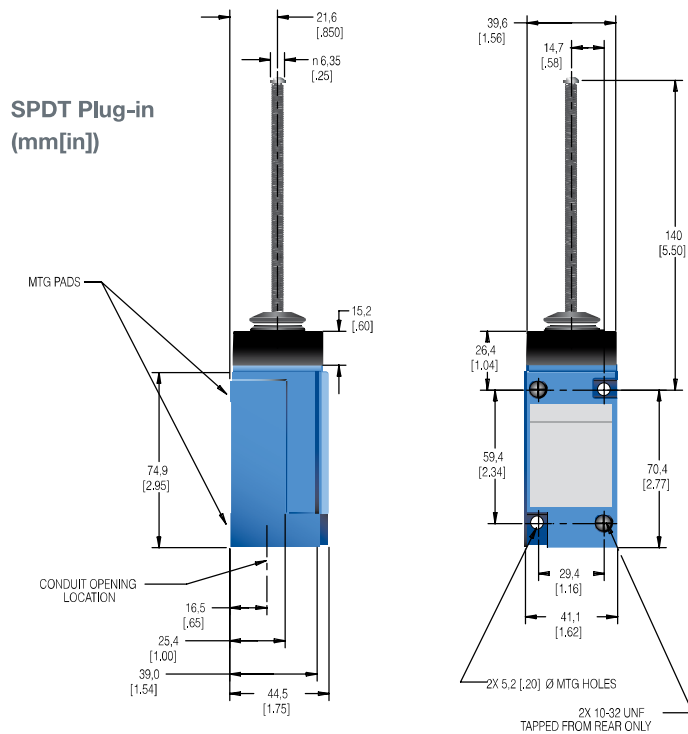



Figure 33. MICRO SWITCH™ HDLS LSK_ _8C Series wobble (double pole) dimensions

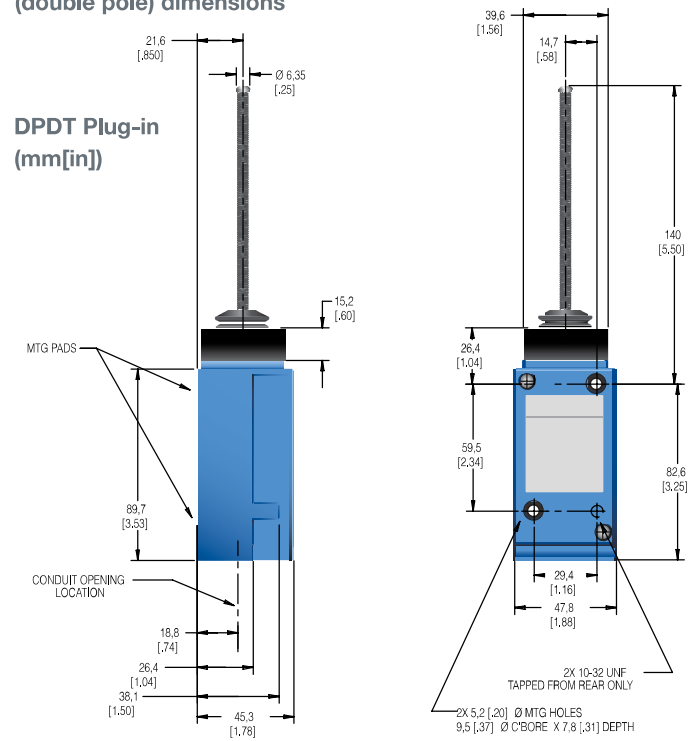

SPDT Non-plug-in (mm[in])

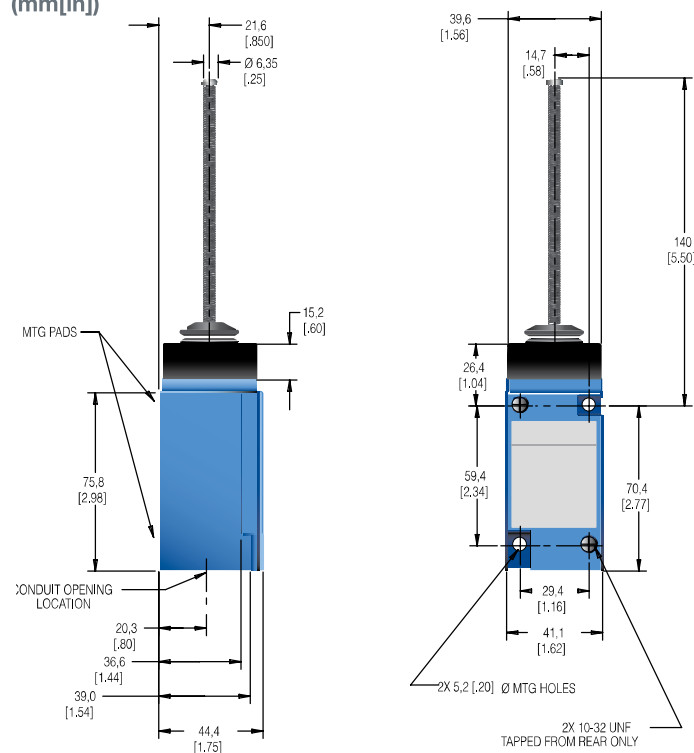

DPDT Non-plug-in (mm[in])

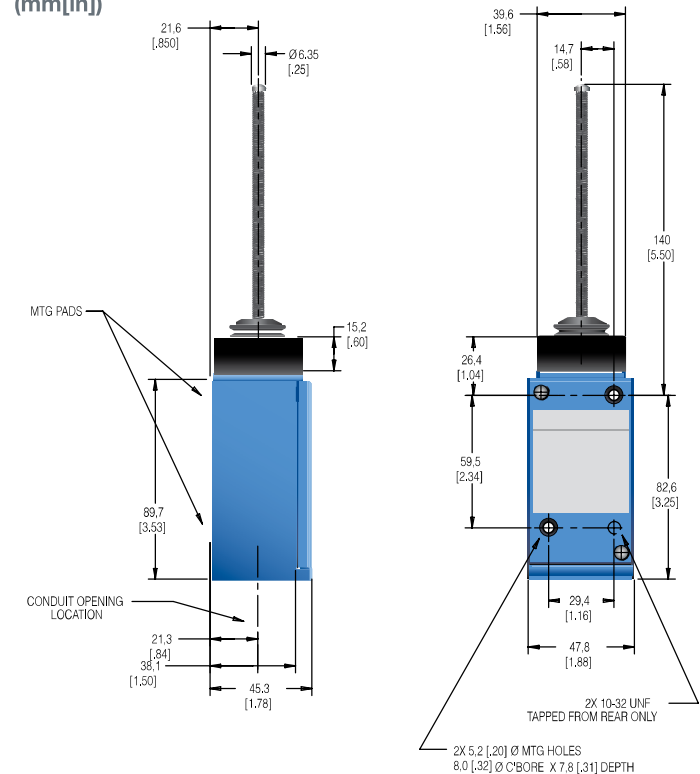

MICRO SWITCH™ Heavy-Duty Limit Switches

SPECIAL APPLICATIONS

HIGH CAPACITY LIMIT SWITCH

Features



- High dc current ratings
- 20 A rating at 120 Vac (single pole)
- Plug-in or non-plug in
- Positive retention lever arm
- High resistance to seismic shock

This series has a wide gap contact block that handles a higher make/break dc load. In addition, a special lever arm has a serrated shaft hole and a cap screw with locking nut for attaching the lever to the rotary shaft. This assures a firm grip on the operating shaft and positive retention of the lever adjustment.

The need for precise operation, coupled with challenging environmental conditions places rigid demands on any control. Honeywell's products are intended to satisfy these demands with its high capacity HDLS, designed to perform reliably under these conditions.

Listings

LSQ051	Double pole, non-plug-in, 0.75 in conduit	
LSQ052	Double pole, plug-in, 0.75 in conduit	
LSQ053	Single pole, non-plug-in, 0.5 in conduit	
LSQ054	Single pole, plug-in, 0.5 in conduit	
LSZ616	Replacement lever for above listings	
Pretravel	17° max.	
Diff. travel	8° max.	
Overtravel	58° min.	
Oper. torque	0,45 Nm [4 in-lb] max.	
Action	CW and CCW (spring return)	



Voltage	Single Pole		Double Pole	
	Resistive Load	Inductive Load	Resistive Load	Inductive Load
125 Vdc	2.0 A	1.0 A	1.0 A	0.4 A
250 Vdc	0.7 A	0.4 A	0.4 A	0.2 A
120 Vac	20 A	20 A	10 A	10 A
240 Vac	15 A	15 A	7.5 A	7.5 A
480 Vac	10 A	10 A	5 A	5 A
600 Vac	5 A	5 A	2.5 A	2.5 A

Maximum operating rate - 15 operations per minute.

NOTE: Same polarity each pole.

SPECIAL APPLICATIONS

GRAVITY RETURN SIDE ROTARY SWITCHES (LSS)

LSS1H gravity-return, side-rotary switches have no return spring mechanism. The weight of the actuating lever must provide the force to restore it to the free position. The 5 in-oz. max. operating torque is useful in conveyor applications since it enables operation by small or lightweight objects. Because the head is unsealed, the **LSS1H** is classified as NEMA 1. However, the switch cavity is sealed to protect the switch contacts.

	LSS1H
Description	Gravity-return side rotary
Circuitry	SPDT, double break
Contacts	Silver
Sealing	NEMA 1
Electrical rating	(B) NEMA B600
Body style	Plug-in
Conduit (NPT)	0.5 in
Differential travel	12° max.
Total travel (no stop)*	360°
Operating torque	0,035 Nm [5 in-oz] max.

* Switch has approximately 180° dwell of the normally closed and normally open switch contacts.
NOTE: Same polarity each pole.




EXTRA LOW TORQUE SIDE ROTARY SWITCHES (LST)

LST1H extra-low torque, side-rotary switches have a low force return spring and a maximim operation torque of 12 in-oz. It is rated as NEMA 1 due to an unsealed head. The switch cavity is sealed to protect the switch contacts.

	LST1H
Description	Extra-low torque side rotary
Circuitry	SPDT, double break
Contacts	Silver
Sealing	NEMA 1
Electrical rating	(B) NEMA B600
Body style	Plug-in
Conduit (NPT)	0.5 in
Pretravel	15° max.
Differential travel	5° max.
Overtravel	60' min.
Total travel	75° nom.
Operating torque	0,085 Nm [12 in-oz] max.

NOTE: Same polarity each pole.

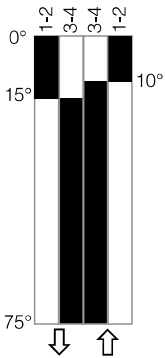

MICRO SWITCH™ Heavy-Duty Limit Switches

This datasheet supports the following MICRO SWITCH™ HDLS Series Heavy-Duty Limit Switches.

LS2A4K	LS4H1A	LSA2R	LSA8A7	LSF2B	LSJ7L-7A	LSN1A-3B
LS2A4KC	LS4J1A-7A	LSA2S	LSA9A	LSF2C	LSJ7L-7M	LSN1A-3D
LS2A4KPC	LS4J1A-7M	LSA3K	LSA9A-1A	LSF3K	LSJ7L-7N	LSN1A-3P
LS2A4KY-FP	LS4J1A-7N	LSA3K1	LSA9A23	LSF3K3	LSJ8A-7A	LSN1A-3S
LS2A4L	LS4J2B-7N	LSA3K1-1A	LSA9A-2L	LSF3K4	LSK1A	LSN1E
LS2A4L-RS	LS4K1A-8A	LSA3K1-1B	LSA9ADD	LSF3K5	LSK1A-8A	LSN1E-1A
LS2A4LX-FP	LS4K1A-8C	LSA3K-1A	LSA9EDD	LSF3K8	LSK1A-8B	LSN1F
LS2C4L	LS4L6C	LSA3K-1B	LSB1A	LSF3N	LSK1A-8C	LSN1F-1B
LS2D3N	LS4M2D	LSA3K1C-1C	LSB1A1	LSF4L	LSK1E-8A	LSN2B
LS2D4K	LS4N1A	LSA3K-1D	LSB1A-1B	LSF5A	LSK1E-8C	LSN3K
LS2D4KC	LS4N2B	LSA3K-1N	LSB1A-4M	LSF6B	LSK1J-8C	LSN3N
LS2D4L	LS4P1A	LSA3K-2A	LSB1A-4N	LSF6B3	LSK2B-8A	LSN4L
LS2D4LM	LS4W1A	LSA3K-2B	LSB1AC	LSF7L	LSK2B-8C	LSN4L-2D
LS2D4L-RS	LS4YAC1A	LSA3K-2C	LSB1E	LSF7L3	LSK3K	LSN4L-3B
LS2E4K	LS4YDC1E	LSA3K-2D	LSB2B	LSF7L4	LSK3K-8A	LSN4L-3D
LS2E4L	LS4YEC1A	LSA3K-2J	LSB2R	LSF7L5	LSK3K-8B	LSN5A
LS2F4K	LS4YJC1A-7N	LSA3K3	LSB3K	LSF7L8	LSK3K-8C	LSN6B
LS2F4L	LSA1A	LSA3K4	LSB3K-1B	LSF8A	LSK4L-8A	LSN6B-3B
LS2F4L5	LSA1A1	LSA3K4-1A	LSB3K-1D	LSF9A	LSK4L-8C	LSN6B-3D
LS2H3K	LSA1A1-1A	LSA3K4-1B	LSB3K-2C	LSG1A	LSK5A-8A	LSN7L
LS2H4K	LSA1A1-1B	LSA3K4-1D	LSB4L	LSG1E	LSK5A-8B	LSN8A
LS2H4L	LSA1A1-2J	LSA3K-4M	LSB5A	LSG2B	LSK5A-8C	LSN8A37
LS2H4L3	LSA1A13	LSA3K-4N	LSB5A-2D	LSG3K	LSK6B	LSN9A
LS2M4N	LSA1A14	LSA3K-4R	LSB6B	LSG4L	LSK6B-8A	LSN9EDD
LS2M4N3	LSA1A15	LSA3K-5C	LSB6B-4N	LSG5A	LSK6B-8B	LSP1A
LS2M4NM	LSA1A-1A	LSA3KA	LSB7L	LSG6B	LSK6B-8C	LSP1A-1B
LS2N3K	LSA1A-1B	LSA3KC	LSB7L-1B	LSG7L	LSK7L-8A	LSP1A-1C
LS2YAB4K	LSA1A-1C	LSA3N	LSB9A	LSG9A	LSK7L-8B	LSP1A-1D
LS2YAB4L	LSA1A-1D	LSA3N14-2J	LSC1A	LSH1A	LSK7L-8C	LSP1A2
LS2YAB4L5M	LSA1A-1F	LSA4L	LSC1E	LSH1A-1B	LSK8A-8A	LSP1A25
LS2YCB4K	LSA1A-1L	LSA4L1	LSC2B	LSH1A2	LSK8A-8B	LSP1A-2A
LS2YDB4K	LSA1A-1M	LSA4L-1A	LSC2C	LSH1A-2B	LSK8A-8C	LSP1A-2D
LS2YEB4K	LSA1A1S	LSA4L-1B	LSC3K	LSH1A-2D	LSK9A-8C	LSP1A4
LS2YMB4N	LSA1A2	LSA4L-1D	LSC3KC	LSH1AB	LSL2C	LSP1A-4M
LS2Z1A	LSA1A2-2J	LSA4L23	LSC4L	LSH1E	LSL2C-2D	LSP1A5-1C
LS2Z1AB	LSA1A-2A	LSA4L-2A	LSC5A	LSH1E-1A	LSL2G	LSP1AB
LS2Z1D	LSA1A-2B	LSA4L-2B	LSC6B	LSH2B	LSL4M	LSP1E
LS2Z1E	LSA1A-2C	LSA4L3-1D	LSC7L	LSH2B-1B	LSL4M4	LSP1E-1A
LS2Z1F	LSA1A-2D	LSA4L4	LSC8A	LSH2B-2D	LSL6C	LSP1F
LS2Z1H	LSA1A-2E	LSA4L4-1D	LSD1A	LSH3K	LSL6C-4N	LSP2B
LS2Z1N	LSA1A-2J	LSA4S	LSD1A6	LSH4L	LSL7M	LSP2B-1B
LS2Z51A	LSA1A-2K	LSA5A	LSD1E	LSH4L13	LSL7M-1P	LSP3K
LS2Z51B	LSA1A3	LSA5A15	LSD1F	LSH4L-1B	LSM2D	LSP3K-1B
LS2Z51D	LSA1A3-1B	LSA5A-1A	LSD2B	LSH4L3	LSM2D-1A	LSP3K-1D
LS2Z51R	LSA1A3-5C	LSA5A-1B	LSD2F	LSH5A	LSM2D-1B	LSP3K3
LS2Z52A	LSA1A4	LSA5A-1C	LSD3K	LSH5A-1L	LSM2D-1D	LSP4L
LS2Z52B	LSA1A-4	LSA5A-1D	LSD3K6	LSH5A-4N	LSM2D-2D	LSP4L3
LS2Z52D	LSA1A-4M	LSA5A25	LSD4L	LSH6B	LSM2D-2J	LSP4L-4N
LS2Z54N	LSA1A-4N	LSA5A7B	LSD5A	LSH6B-1B	LSM2DM	LSP4L5
LS2Z54N-C	LSA1A-4R	LSA5AB-1A	LSD5A7	LSH7L	LSM2H	LSP5A
LS2Z616	LSA1A5	LSA5AB-1B	LSD6B	LSH9A	LSM2U	LSP5A7
LS30218	LSA1A-9B	LSA5ADD	LSD7L	LSH9A7	LSM4N	LSP6B
LS3A1A	LSA1AA	LSA6B	LSD8A	LSJ1A	LSM4N-1A	LSP7L
LS3A2B	LSA1AB	LSA6B1	LSD9A	LSJ1A-1N	LSM4N-1B	LSP7L-2D
LS3A3K	LSA1AB-1B	LSA6B-1A	LSE1A	LSJ1A-7A	LSM4N-2B	LSP7L3
LS3A3K-7AA	LSA1AC	LSA6B-1B	LSE1A3	LSJ1A-7M	LSM6D	LSP7S3
LS3A3K-7AA-RS	LSA1AC-2C	LSA6B-1D	LSE1A4	LSJ1A-7N	LSM6D-1B	LSP8A
LS3D3K	LSA1AC-4M	LSA6B-1F	LSE1A5	LSJ1AB-7N	LSM6D-1D	LS-PA5A4
LS3F1A8	LSA1AH12	LSA6B-1L	LSE1ADD	LSJ1AC-7M	LSM6D-1F	LSPA5D2
LS3F1E	LSA1E	LSA6B-2B	LSE1E	LSJ1AC-7N	LSM6D-1P	LSPA5D4
LS3M2D	LSA1E-1B	LSA6B-2C	LSE1E4	LSJ1ADD-7A	LSM6D-2A	LSQ037
LS3YDC1A	LSA1E-2A	LSA6B-2D	LSE2B	LSJ1E-7A	LSM6D-2B	LSQ038
LS3YDC1E	LSA1E-2D	LSA6B-3D	LSE3K	LSJ1E-7M	LSM6D3	LSQ051
LS3YVC1A	LSA1F	LSA6B4-2C	LSE4L	LSJ2B-7A	LSM6D4	LSQ052
LS3YVC1E	LSA2B	LSA6R	LSE5A	LSJ2B-7M	LSM6D4-5D	LSQ053
LS4A1A	LSA2B15-5D	LSA6S	LSE6B	LSJ2B-7N	LSM6D-5B	LSQ054
LS4A1E	LSA2B-1A	LSA7L	LSE6B5	LSJ3K	LSM6U	LSQ081
LS4A1J	LSA2B-1B	LSA7L-1A	LSE6C5	LSJ3K-7A	LSM7N	LSQ117-QC
LS4A2B	LSA2B-1C	LSA7L-1B	LSE6S	LSJ3K-7M	LSM7N-1A	LSQ2A4L352
LS4A3K	LSA2B-1D	LSA7L-1C	LSE7L	LSJ3K-7N	LSM7N-1B	LSQ2H4KP227
LS4A3K-1B	LSA2B25-5D	LSA7L-1D	LSE7L3	LSJ4L-7A	LSM7N-1D	LSQ2L4M321
LS4A3K-2B	LSA2B-2A	LSA7L-2D	LSE9A	LSJ4L-7M	LSM7N3	LSQ300
LS4A3K-7AA	LSA2B-2B	LSA7L-2J	LSF1A	LSJ5A-7A	LSM7N-4	LSQ310-20
LS4C1A	LSA2B-2C	LSA7L3-1B	LSF1A3	LSJ5A-7M	LSM7U	LSQ3A3K281
LS4C3K	LSA2B-2D	LSA7L4	LSF1A4	LSJ5A-7N	LSM7U-2D	LSQ3A3K281-VL363
LS4D1A	LSA2B3-5C	LSA7L-4N	LSF1A5	LSJ6B	LSN1A	LSQ3N2D3357
LS4D3K	LSA2B4	LSA7L-4R	LSF1A8	LSJ6B-7A	LSN1A-1B	LSQA1A278
LS4F1A	LSA2B5	LSA7L-5C	LSF1E	LSJ6B-7M	LSN1A-2C	LSQA1A313
LS4F2B	LSA2F	LSA8A	LSF1F	LSJ6B-7N	LSN1A-3A	LSQA1A341

HDLS Series

LSQA1A366	LSU5A	LSYAC2R	LSYDC5AC	LSYJC7LR-7MFP	LSYPB2B
LSQA3K129	LSU6B	LSYAC2S	LSYDC5AE	LSYJC7LR-7NFP	LSYPB2B-4N
LSQA3K163	LSU7L	LSYAC3K	LSYDC5KP-FP	LSYKB1A-8A	LSYPB3K
LSQA3K-2C-SCO	LSU8A	LSYAC3KC-FP	LSYDC5KQ-FP	LSYKB1A-8C	LSYPB3K3
LSQA3K363	LSU9A	LSYAC3KDD-FP	LSYDC5KY-FP	LSYKB3K-8C	LSYPB3K4
LSQA6B134	LSV1A	LSYAC3KP	LSYDC6B	LSYKB4L-8C	LSYPB3KP-FP
LSQA6B314	LSV1E	LSYAC3KPB-FP	LSYDC7L	LSYKB4LM-8C	LSYPB4L
LSQD3K-SCO	LSV2B	LSYAC3KPC-FP	LSYDC9KP-FP	LSYKB6B-8C	LSYPB4L-1B
LSQE3K318	LSV3K	LSYAC3KP-FP	LSYEB4L5	LSYKB7L-8C	LSYPB4L3
LSQH1A322	LSV4L	LSYAC3KQ-1BFP	LSYEC1A	LSYKC1A-8A	LSYPB4L-4N
LSQJ1A213	LSV5A	LSYAC3KQ-FP	LSYEC1ADD	LSYKC1A-8C	LSYPB6B
LSQL4M292	LSV6B	LSYAC3KQ-FP-C	LSYEC1ADD-C	LSYKC1AC-8A	LSYPB7L
LSQL7M122	LSV7L	LSYAC3KY-FP	LSYEC1AE	LSYKC1AC-8C	LSYPB7L3
LSQL7M123	LSW1A	LSYAC3N	LSYEC3K	LSYKC1ADD-8C	LSYPC1A
LSQM4N293	LSW1A4	LSYAC4L	LSYEC3KP-FP	LSYKC1ADD-8C-C	LSYPC1J
LSQM6D315	LSW1A5	LSYAC4L4	LSYEC3KQ-FP	LSYKC1E-8C	LSYPC2B
LSQMC7N147	LSW1AC	LSYAC4LAA-FP	LSYEC3KY-FP	LSYKC3K-8C	LSYPC2B-1B
LSQMC7N148	LSW1E	LSYAC4LX-FP	LSYEC4LX-FP	LSYKC3KP-8AFP	LSYPC3K
LSQMC7N311	LSW2B	LSYAC5A	LSYEC5KP-FP	LSYKC3KQ-8CFFP	LSYPC3KP-FP
LSQR1A316	LSW3K	LSYAC5KPC-FP	LSYEC5KY-FP	LSYKC4L-8C	LSYPC3KQ-FP
LSQUB1A323	LSW3N	LSYAC5KP-FP	LSYEC6B	LSYKC5KQ-8BFP	LSYPC3KY-FP
LSQUB7N191	LSW4L	LSYAC5KQ-FP	LSYFB1A	LSYKC7LR-8AFP	LSYPC4LX-FP
LSQUC3K170	LSW5A	LSYAC5KY-FP	LSYFB3K	LSYLB4M	LSYRB1A
LSQUC5K272	LSW6B	LSYAC6B	LSYFB3K3	LSYLB6C	LSYRB3KP-FP
LSQYAB1AC365	LSW7L	LSYAC6B-1A	LSYFB3K4	LSYLB6T	LSYRB6B
LSQYAB4L347	LSYAB1A	LSYAC6B-1B	LSYFB4L	LSYLB7M	LSYRC1A
LSQYAB4LX249	LSYAB1A-1B	LSYAC6B-2L	LSYFB4LM	LSYLB7MR-FP	LSYRC1A3
LSQYDB3K356	LSYAB1A-2A	LSYAC6B-4N	LSYFB4LX-FP	LSYLB7T	LSYRC1ADD
LSQYFB1A344	LSYAB1A3	LSYAC7L	LSYFB7L	LSYLC2C	LSYRC1ADD-C
LSQYFB3K125-QC	LSYAB1A-4N	LSYAC7LR-FP	LSYFC1A	LSYLC4M	LSYRC1E3
LSQYFB3K345	LSYAB1AB	LSYAC9A	LSYFC1ADD	LSYLC4MX-FP	LSYRC2B
LSQYFC3K223	LSYAB1AC	LSYAC9AB	LSYFC1ADD-C	LSYLC6C	LSYRC3KP-FP
LSQYJB1A346	LSYAB1E	LSYBB1A	LSYFC1AE	LSYMB2D	LSYRC4L
LSQYMC7N361	LSYAB1E-2B	LSYBB2B	LSYFC3K	LSYMB2D3	LSYRC4LX-FP
LSQYPB3KP364	LSYAB1E4-2B	LSYBB3K	LSYFC3K48P-FP	LSYMB4N	LSYRC5KP-FP
LSQYUB1A334	LSYAB1EP-1A	LSYBB3KP-FP	LSYFC3KP-FP	LSYMB4N-1A	LSYRC5KQ-FP
LSQYUB3K336	LSYAB1F	LSYBB4L	LSYFC3KQ-FP	LSYMB4N-2K	LSYRC9A
LSQYUB3K339	LSYAB2B	LSYBB5KP-FP	LSYFC3KY-FP	LSYMB4N3X-FP	LSYUB1A
LSQYUB3KC319	LSYAB2B3	LSYBC1A	LSYFC5KQ-FP	LSYMB4NX-FP	LSYUB1A13
LSQZ52J	LSYAB2F	LSYBC3K	LSYFC6B	LSYMB6D	LSYUB1A13-2A
LSQZ55C259	LSYAB2S	LSYBC3KP-FP	LSYFC7L	LSYMB6D-2D	LSYUB1A13-2B
LSR1A	LSYAB3K	LSYBC3KQ-FP	LSYFC7L3	LSYMB6U	LSYUB1A23
LSR1A-1A	LSYAB3K1	LSYBC5A	LSYFC7L4	LSYMB7N	LSYUB1A23-2D
LSR1A-1B	LSYAB3K-1B	LSYBC5KP-FP	LSYGB1A	LSYMB7N-1C	LSYUB1A3
LSR1A-2K	LSYAB3K2-5C	LSYBC9A-1D	LSYGB1E	LSYMB7N-1D	LSYUB2B
LSR1A-4N	LSYAB3K-2J	LSYCB1A	LSYGC3KP-FP	LSYMB7N3	LSYUB3K
LSR1A-5C	LSYAB3K-5D	LSYCB1E	LSYHB1A	LSYMB7N3-1A	LSYUB6B
LSR1ADD	LSYAB3KE-FP	LSYCB3KQ-FP	LSYHC1A	LSYMB7U	LSYUB6B13
LSR1E	LSYAB3KPC-FP	LSYCB4L	LSYHC3K	LSYMC2D-1D	LSYUB6B3
LSR2B	LSYAB3KP-FP	LSYCB4SX-FP	LSYHC3KA	LSYMC4N	LSYUB9AC
LSR2B-4N	LSYAB3KQ-FP	LSYCB6B	LSYHC3KP-FP	LSYMC4NX-1BFP	LSYUC1A
LSR3K	LSYAB3N	LSYCB9A7	LSYHC4L	LSYMC4NXB-FP	LSYUC1A-1B
LSR3K1	LSYAB3N-4N	LSYCC1A	LSYHC4LX-FP	LSYMC4NX-FP	LSYUC1ADD
LSR3K-4M	LSYAB4L	LSYCC1ADD	LSYHC7L	LSYMC6D	LSYUC2B
LSR4L	LSYAB4L-1B	LSYCC1ADD-C	LSYJB1A-7A	LSYMC6D-1B	LSYUC3KP-FP
LSR5A	LSYAB4L24	LSYCC1AE	LSYJB1A-7M	LSYMC6DF	LSYUC3KQ-FP
LSR6B	LSYAB4L24-1	LSYCC3K	LSYJB1A-7N	LSYMC6DF-1B	LSYUC3KY-FP
LSR6B-2D	LSYAB4L-2A	LSYCC3KP-FP	LSYJB1E-7A	LSYMC7N	LSYUC4LX-FP
LSR6B-2L	LSYAB4L360	LSYCC3KQ-FP	LSYJB1E-7M	LSYMC7NDE-FP	LSYUC5KQ-FP
LSR6B-4M	LSYAB4L4	LSYCC3KY-FP	LSYJB1J-7A	LSYMC7NR-FP	LSYUC6B
LSR7L	LSYAB4LX-FP	LSYCC4L	LSYJB2B-7M	LSYNB1A	LSYUC9ADD
LSR7L-2D	LSYAB4S	LSYCC4LX-FP	LSYJB3K-7A	LSYNB1AC	LSYVB1A
LSR9A	LSYAB5A	LSYCC5A	LSYJB3K-7M	LSYNB2B	LSYVB2B
LSS1H	LSYAB6B	LSYCC5KP-FP	LSYJB3K-7N	LSYNB3K	LSYVB3K
LSS1H-4N	LSYAB6B-1B	LSYCC5KY-FP	LSYJB3KQ-7MFP	LSYNB3K-3S	LSYVB4L
LSS1HDD	LSYAB6B-2D	LSYCC6B	LSYJB4L-7M	LSYNB3K5-3S	LSYVC1A
LSS1HDD-C	LSYAB7L	LSYCC7L	LSYJB4LX-7AFP	LSYNB3KP-FP	LSYVC3KP-FP
LST1H	LSYAB7L-1A	LSYDB1A	LSYJB5A-7A	LSYNB3KQ-3BFP	LSYVC3KQ-FP
LST1H-1C	LSYAB7L-2B	LSYDB2B	LSYJB6B-7M	LSYNB4L	LSYVC3KY-FP
LSU1A	LSYAC1A	LSYDB3K	LSYJC1A-7A	LSYNB4L-3P	LSYVC7L
LSU1A-1	LSYAC1A1-1D	LSYDB4L	LSYJC1A-7M	LSYNB4LX-FP	LSYWB1A
LSU1A-1B	LSYAC1A-1B	LSYDB6B	LSYJC1A-7N	LSYNB5A	LSYWB3K
LSU1A-1D	LSYAC1A2C	LSYDB7L	LSYJC1AC-7M	LSYNB7L	LSYWB3KQ-FP
LSU1A-2B	LSYAC1A-2D	LSYDC1A	LSYJC1ADD-7A	LSYNC1A	LSYWC1A
LSU1A-2D	LSYAC1A-4N	LSYDC1ADD	LSYJC1ADD-7N	LSYNC1ADD	LSYWC1ADD
LSU1A4	LSYAC1A-C	LSYDC1ADD-C	LSYJC3K-7A	LSYNC1E	LSYWC1F
LSU1A-4R	LSYAC1ADD	LSYDC1AE	LSYJC3K-7N	LSYNC3KPC-FP	LSYWC3KP-FP
LSU1E	LSYAC1ADD-1B	LSYDC3K	LSYJC3KP-7AFP	LSYNC3KP-FP	LSYWC3KY-FP
LSU2B	LSYAC1ADD-4N	LSYDC3KPC-FP	LSYJC3KQ-7MFP	LSYNC3KQ-FP	LSYWC5KQ-FP
LSU3K	LSYAC1ADD-C	LSYDC3KP-FP	LSYJC3KQ-7AFP	LSYNC4LX-FP	LSYWC6B
LSU3K1	LSYAC1AH	LSYDC3KQ-FP	LSYJC3KQ-7MFP	LSYNC5KQ-FP	LSYWC7L
LSU3K-1A	LSYAC1E	LSYDC3KY-FP	LSYJC3KQ-7NFP	LSYPB1A	
LSU3K-2J	LSYAC1EC	LSYDC4LX-FP	LSYJC5KQ-7MFP	LSYPB1AC	
LSU4L	LSYAC2B	LSYDC5A	LSYJC6B-7M	LSYPB1E	

MICRO SWITCH™ Heavy-Duty Limit Switches

ALSO AVAILABLE



Fully potted MICRO SWITCH™ HDLS heavy-duty limit switches provide an extra degree of protection in harsh environments by sealing the basic switch cavity with epoxy. These switches are the same as the non- plug-in HDLS except that the entire switch cavity is filled with epoxy in addition to the conduit entrance. The fully potted HDLS switches are pre-leaded, with either cable or connectors.

- Excellent sealing capability for harsh-duty food and beverage wash downs and severe machine tool environments
- Diaphragm sealing
- 12 inch STOW-A cable (other lengths available) or connector version
- Cable versions: NEMA 1, 6, 6P, 12
- Connector versions: NEMA 1, 6, 6P, 12, 13
- All fluorocarbon seals (low temperature fluorosilicone seals available)
- UL, CSA, CE, CCC



MICRO SWITCH™ HDLS switches are also available in all stainless-steel versions. Designed for use in highly corrosive environments, such as petrochemical plants, food processing plants, shipboard, and dockside locations. The type 316 cast stainless steel body is designed to minimize crevices where food particles could become trapped in water. The actuator, operating head, and screws are also stainless steel. All seals are fluorocarbon to provide excellent chemical resistance and to withstand operating temperatures up to 121 °C [250 °F] and pressurized steam cleaning. Pre-leaded and epoxy-filled versions also available.

- Corrosion-resistant stainless steel non-plug in body, head, and rotary shaft
- Stainless steel levers
- Fluorocarbon seals (low temperature fluorosilicone seals available)
- NEMA 1, 3, 3R, 4, 4X, 6, 6P, and 13
- UL, CSA, CE, CCC

To learn more about Honeywell's HDLS products, call **+1-815-235-6847 or 1-800-537-6945**.

ADDITIONAL INFORMATION

The following associated literature is available on the Web at sensing.honeywell.com:

- Product installation instructions
- Product range guide
- Product nomenclature tree
- Product application-specific information
 - Application Note: Sensors and Switches in Oil Rig Applications
 - Application Note: Sensors and Switches for Industrial Manual Process Valves
 - Application Note: Sensors and Switches Used in Valve Actuators and Valve Positioners

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
honeywell.com

The Honeywell logo, consisting of the word "Honeywell" in a bold, red, sans-serif font.

002345-3-EN IL50 GLO
December 2013
Copyright © 2013 Honeywell International Inc. All rights reserved.