



125 & 200 AMP—7 TERMINAL—RINGLESS—NON JAW CLAMPING—600 VAC

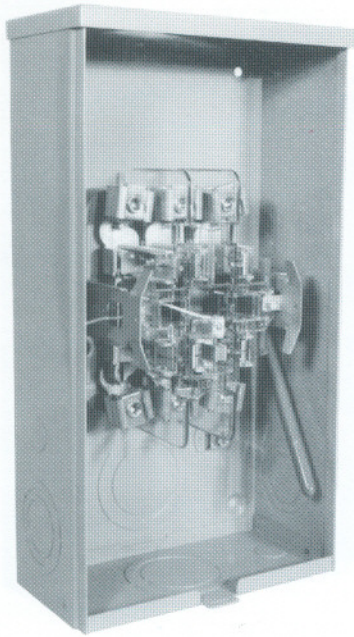


U7421-RL



7422
7423
9320
9321



7420
7421
7573
8100

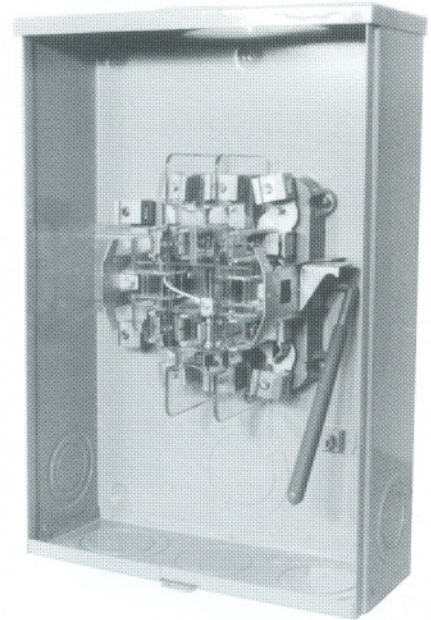

U9320-RRL



125 AMP—7 TERMINAL—RINGLESS—3Ø4W

AMP	SERVICE	CATALOG NUMBER	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
125	OH	U7573-RL	H.O.	#6-2/0	#6-2/0	LEVER	4 ⁷ / ₈	10	18 ¹ / ₂	2	2	2	—	1/4, 1/2	3/4
125	OH	U8100-RL	H.O.	#6-2/0	#6-2/0	NO	4 ⁷ / ₈	10	18 ¹ / ₂	2	2	2	—	1/4, 1/2	3/4
125	OH/UG	U9320-RRL	H.O.	#6-2/0	#6-2/0	LEVER	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1/4	1/4, 1/2
125	OH/UG	U9321-RRL	H.O.	#6-2/0	#6-2/0	NO	4 ¹ / ₂	13	19	3	2 ¹ / ₂	3	3	1/4	1/4, 1/2

200 AMP—7 TERMINAL—RINGLESS—3Ø4W

AMP	SERVICE	CATALOG NUMBER	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
200	OH	U7420-RL	H.O.	#6-350 kcmil	#6-350 kcmil	NO	4 ⁷ / ₈	10	18 ¹ / ₂	3	2 ¹ / ₂	3	—	1/4, 1/2	3/4
200	OH	U7421-RL	H.O.	#6-350 kcmil	#6-350 kcmil	LEVER	4 ⁷ / ₈	10	18 ¹ / ₂	3	2 ¹ / ₂	3	—	1/4, 1/2	3/4
200	OH/UG	U7422-RXL	C.P.	#6-350 kcmil	#6-350 kcmil	NO	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1/4	1/4, 1/2
200	OH/UG	U7423-RXL	C.P.	#6-350 kcmil	#6-350 kcmil	LEVER	4 ¹ / ₂	13	19	3	2 ¹ / ₂	3	3	1/4	1/4, 1/2

HUBS: For proper hub selection see the hub suffix chart on the accessory page.

BYPASS: Lever operates bypass device only; does not provide clamping action on meter spades.

CONNECTORS: Units supplied with extruded aluminum connectors and bonded triplex neutral.

For field installed insulated neutral in the 13" wide 7422 and 7423 units order kit number **K1047**.

