

# AcuSplitCT Series 600/800/1000/1200/1500A

## Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The Split Core CTs are ideal for quick and easy installation without disconnecting cables during installation. The internal precision burden resistor across the secondary winding of the CT provides a safe low voltage output and permits safe opening of the secondary.

### FEATURES

- Clamp-on design, easy installations
- 333mV output, safe installations
- Most cost-effective

### SPECIFICATIONS

Rated Primary Current	600A, 800A, 1000A, 1200A, 1500A
Rated Secondary Current	333mV
Linearity Accuracy	1% (at 10%-130%)
Leads	8'(2.5m), twisted pair, 22AWG
Window Size	2 inches
Insulation Voltage	600Vac, Category III
Frequency range	50/60Hz
Withstand Voltage	3,000Vac
Standard	IEC 60044-1
Certification	UR, CE approved & RoHS compliant
Construction	Epoxy encapsulated housing

### ORDERING INFORMATION

Ordering Number:	AcuCT- 200 -	Rated Input	: 333
Ordering Example:	AcuCT- 200 -	800	: 333
		600: 600A	
		800: 800A	
		1000: 1000A	
		1200: 1200A	
		1500: 1500A	



**Accuenergy Corp.**

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



### DIMENSIONS

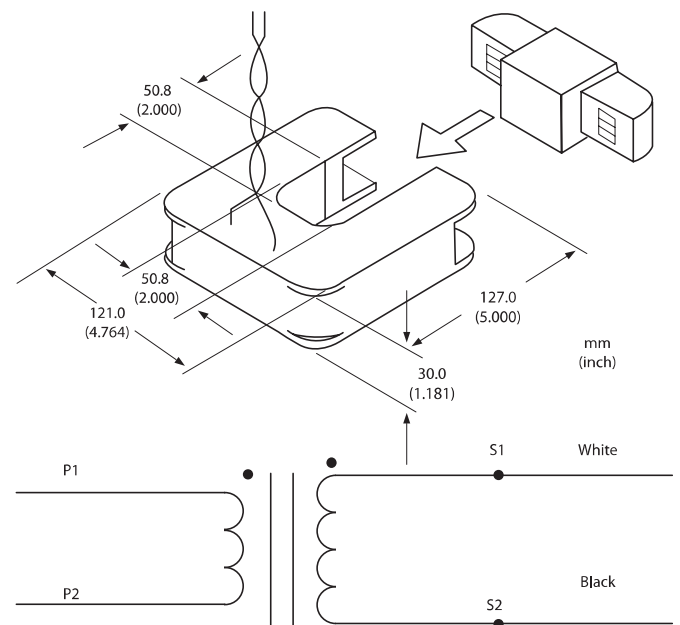

**ACCUENERGY**  
Your Power and Automation Partner