

AcuSplitCT Series 400/600/1000/1500/2000/3000/5000A

Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The Split Core CTs are ideal for quick and easy installation without disconnecting cables during installation. The internal precision burden resistor across the secondary winding of the CT provides a safe low voltage output and permits safe opening of the secondary.

FEATURES

- Clamp-on design, easy installations
- 333mV output, safe installations
- Most cost-effective

SPECIFICATIONS

Rated Primary Current	400A, 600A, 1000A, 1500A, 2000A, 3000A, 5000A
Rated Secondary Current	333mV
Linearity Accuracy	1% (at 10%-130%)
Leads	8'(2.5m), twisted pair, 22AWG
Window Size	3 inch by 5 inch
Insulation Voltage	600Vac, Category III
Frequency range	50/60Hz
Withstand Voltage	3,000Vac
Standard	IEC 60044-1
Certification	UL, CE approved & RoHS compliant
Construction	Epoxy encapsulated housing

ORDERING INFORMATION

Ordering Number:	Rated Input	
AcuCT- 3050 -		: 333
Ordering Example: AcuCT- 3050 -	1000	: 333
	400: 400A	
	600: 600A	
	1000: 1000A	
	1500: 1500A	
	2000: 2000A	
	3000: 3000A	
	5000: 5000A	



Accuenergy Corp.

Los Angeles-Toronto-Beijing


North America Toll Free: 1-877-721-8908

Web: www.accuenergy.com

Email: marketing@accuenergy.com



DIMENSIONS

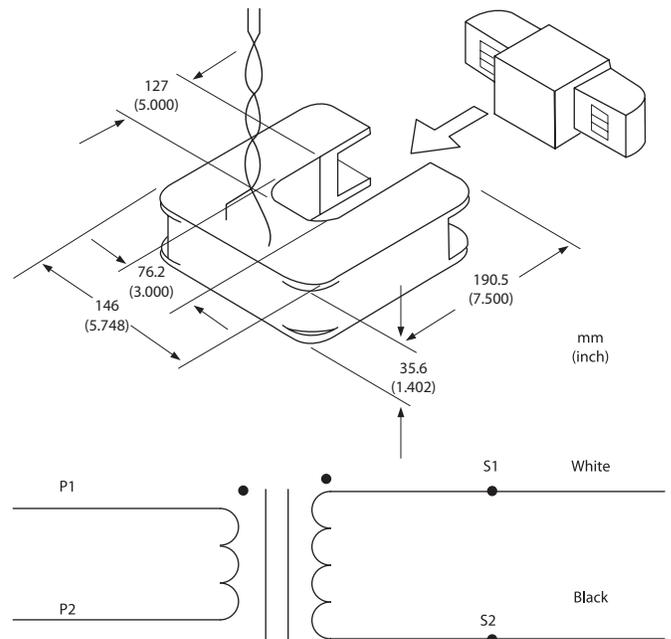

ACCUENERGY

Your Power and Automation Partner