



**200 AMP—LEVER BYPASS—4 & 5 TERMINAL—RINGLESS
NON JAW CLAMPING—600 VAC**


**NEW!
RESIDENTIAL BYPASS SERIES**

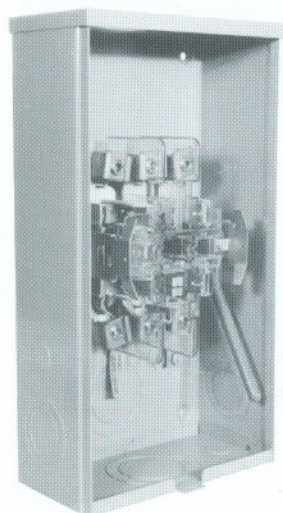

U9318-RL




3278
3598

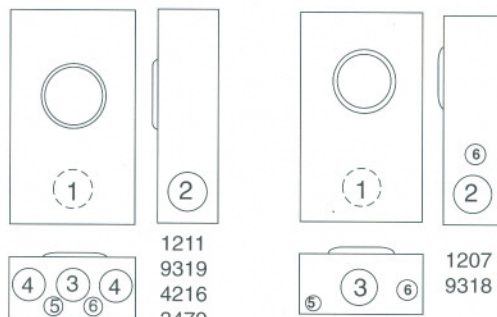

1211
9319
4216
3479

1207
9318

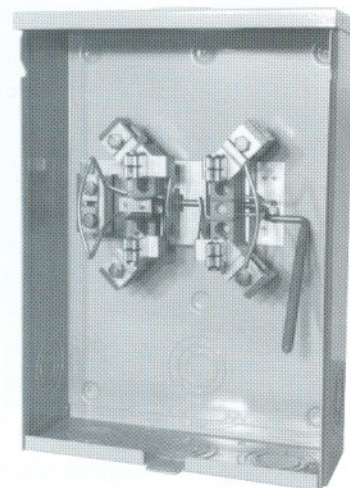

U3278-RL
(New Style Bypass)



200 AMP—4 & 5 TERMINAL—RESIDENTIAL BYPASS—RINGLESS—1Ø3W OR 3Ø3W

TERM	SERVICE	CATALOG NUMBER	HUB	CONNECTORS	BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				CU/AL LINE & LOAD		D"	W"	H"	1	2	3	4	5	6
4	OH	U3278-RL	H.O.	#2-350 kcmil	LEVER	4 ¹ / ₈	11	15 ¹ / ₂	2 ¹ / ₂	2 ¹ / ₂	2	2	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄
5	OH	U3598-RL*	H.O.	#2-350 kcmil	LEVER	4 ¹ / ₈	11	15 ¹ / ₂	2 ¹ / ₂	2 ¹ / ₂	2	2	1 ¹ / ₄ , 1 ¹ / ₂	1 ¹ / ₄
4	OH/UG	U4216-RXL	C.P.	#2-350 kcmil	LEVER	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1 ¹ / ₄	1 ¹ / ₄ , 1 ¹ / ₂
5	OH/UG	U3479-RXL	C.P.	#2-350 kcmil	LEVER	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1 ¹ / ₄	1 ¹ / ₄ , 1 ¹ / ₂

FIFTH TERMINAL: For field mounted fifth terminal, order as extra **K3356** for the 3278 and 4216.

200 AMP—4 & 5 TERMINAL—RINGLESS—1Ø3W OR 3Ø3W

TERM	SERVICE	CATALOG NUMBER	HUB	CONNECTORS	BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				CU/AL LINE & LOAD		D"	W"	H"	1	2	3	4	5	6
4	OH	U1207-RL	H.O.	#6-350 kcmil	LEVER	4 ⁷ / ₈	10	18 ¹ / ₂	3	2 ¹ / ₂	3	—	1 ¹ / ₄ , 1 ¹ / ₂	3 ³ / ₄
4	OH/UG	U1211-XL	C.P.	#6-350 kcmil	LEVER	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1 ¹ / ₄	1 ¹ / ₄ , 1 ¹ / ₂
5	OH	U9318-RL	H.O.	#6-350 kcmil	LEVER	4 ⁷ / ₈	10	18 ¹ / ₂	3	2 ¹ / ₂	3	—	1 ¹ / ₄ , 1 ¹ / ₂	3 ³ / ₄
5	OH/UG	U9319-XL	C.P.	#6-350 kcmil	LEVER	4 ⁷ / ₈	13	19	3	2 ¹ / ₂	3	3	1 ¹ / ₄	1 ¹ / ₄ , 1 ¹ / ₂

FIFTH TERMINAL: For field mounted fifth terminal, order as extra **K3866** for the 1207 or 1211.

HUBS: For proper hub selection see the hub suffix chart on the accessory page.

BYPASS: Lever operates bypass device only; does not provide clamping action on meter spades.

CONNECTORS: Units are supplied with extruded aluminum connectors and bonded, triplex neutral.

****TRIPLEX GROUND** factory installed as standard.

